


Very High Voltage IGBT

IXEL40N400


(Electrically Isolated Tab)



$$\begin{aligned}
 V_{CES} &= 4000V \\
 I_{C90} &= 40A \\
 V_{CE(sat)} &\leq 3.5V \\
 t_{fi(typ)} &= 425ns
 \end{aligned}$$

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 125°C	4000	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C90}	$T_C = 90^\circ\text{C}$	40	A
I_{CM}	Pulse Width Limited by T_{JM} , 1ms, $V_{GE} = 20V$	250	A
P_C	$T_C = 25^\circ\text{C}$	380	W
T_J		- 40 ... +125	$^\circ\text{C}$
T_{JM}		125	$^\circ\text{C}$
T_{stg}		- 40 ... +125	$^\circ\text{C}$
T_L	Maximum Lead Temperature for Soldering	300	$^\circ\text{C}$
T_{SOLD}	1.6 mm (0.062 in.) from Case for 10s	260	$^\circ\text{C}$
V_{ISOL}	$I_{ISOL} < 1\text{mA}$, 50/60 Hz, t = 1 minute	4000	V~
F_C	Mounting Force	30..170 / 7..36	Nm/lb-in.
Weight		8	g

ISOPLUS i5-Pak™



G = Gate C = Collector
E = Emitter

Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Mounting Surface
- 4000V Electrical Isolation
- UL Recognized Package
- High Peak Current Capability
- Low Saturation Voltage
- Molding Epoxies Meet UL 94 V-0 Flammability Classification

Advantages

- High Power Density
- Easy to Mount

Applications

- Capacitor Discharge
- Pulsar Circuits

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
$V_{GE(th)}$	$I_C = 10\text{mA}$, $V_{CE} = V_{GE}$	5.5		7.0 V
I_{CES}	$V_{CE} = V_{CES}$, $V_{GE} = 0V$ Note 2, $T_J = 125^\circ\text{C}$		1.5	100 μA mA
I_{GES}	$V_{CE} = 0V$, $V_{GE} = \pm 20V$			± 500 nA
$V_{CE(sat)}$	$I_C = I_{C90}$, $V_{GE} = 15V$, Note 1 $T_J = 125^\circ\text{C}$		2.5 3.0	3.5 V V

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
g_{fs}	$I_C = I_{C90}, V_{CE} = 10\text{V}$, Note 1	14	23	S
I_{SC}	$I_C = I_{C90}, V_{CC} = 3400\text{V}, V_{CM} < 4000\text{V}$ $V_{GE} = 15\text{V}, t_{SC} \leq 10\mu\text{s}$		200	A
C_{ies}		$V_{CE} = 25\text{V}, V_{GE} = 0\text{V}, f = 1\text{MHz}$		5900
C_{oes}			280	pF
C_{res}			125	pF
R_{Gint}			6	Ω
$Q_{g(on)}$	$I_C = I_{C90}, V_{GE} = 15\text{V}, V_{CE} = 1000\text{V}$		270	nC
Q_{ge}			60	nC
Q_{gc}			133	nC
$t_{d(on)}$	Inductive load, $T_J = 25^\circ\text{C}$		160	ns
t_{ri}			100	ns
E_{on}	$I_C = I_{C90}, V_{GE} = 15\text{V}$		55	mJ
$t_{d(off)}$		$V_{CE} = 2800\text{V}, R_G = 33\Omega$		630
t_{fi}	Note 3			425
E_{off}				165
$t_{d(on)}$	Inductive load, $T_J = 125^\circ\text{C}$		155	ns
t_{ri}			105	ns
E_{on}	$I_C = I_{C90}, V_{GE} = 15\text{V}$		85	mJ
$t_{d(off)}$		$V_{CE} = 2800\text{V}, R_G = 33\Omega$		715
t_{fi}	Note 3			455
E_{off}				205
R_{thJC}				0.26°C/W
R_{thCK}	(Pressure Mount)		0.15	$^\circ\text{C/W}$

ISOPLUS i5-Pak™ HV Outline

Pin 1 = Gate
Pin 2 = Emitter
Pin 3 = Collector
Tab 4 = Isolated

SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	0.190	0.205	4.83	5.21
A1	0.102	0.118	2.59	3.00
A2	0.046	0.055	1.17	1.40
b	0.045	0.055	1.14	1.40
b1	0.063	0.072	1.60	1.83
b2	0.058	0.068	1.47	1.73
c	0.020	0.029	0.51	0.74
D	1.020	1.040	25.91	26.42
E	0.770	0.799	19.56	20.29
e	0.150 BSC		3.81 BSC	
e1	0.450 BSC		11.43 BSC	
L	0.780	0.820	19.81	20.83
L1	0.080	0.102	2.03	2.59
Q	0.210	0.235	5.33	5.97
Q1	0.490	0.513	12.45	13.03
R	0.150	0.180	3.81	4.57
R1	0.100	0.130	2.54	3.30
S	0.668	0.690	16.97	17.53
T	0.801	0.821	20.34	20.85
U	0.065	0.080	1.65	2.03

Notes:

1. Pulse test, $t \leq 300\mu\text{s}$, duty cycle, $d \leq 2\%$.
2. Part must be heatsunk for high-temp I_{ces} measurement.
3. Switching times & energy losses may increase for higher $V_{CE(Clamp)}$, T_J or R_G .

PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2
by one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @ $T_J = 25^\circ\text{C}$

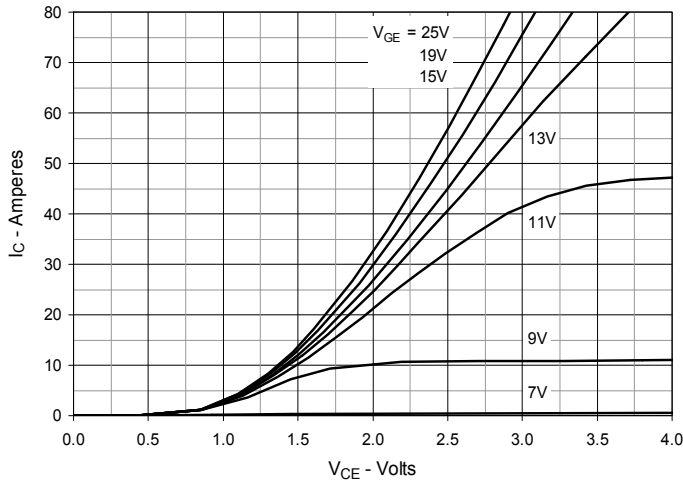


Fig. 2. Extended Output Characteristics @ $T_J = 25^\circ\text{C}$

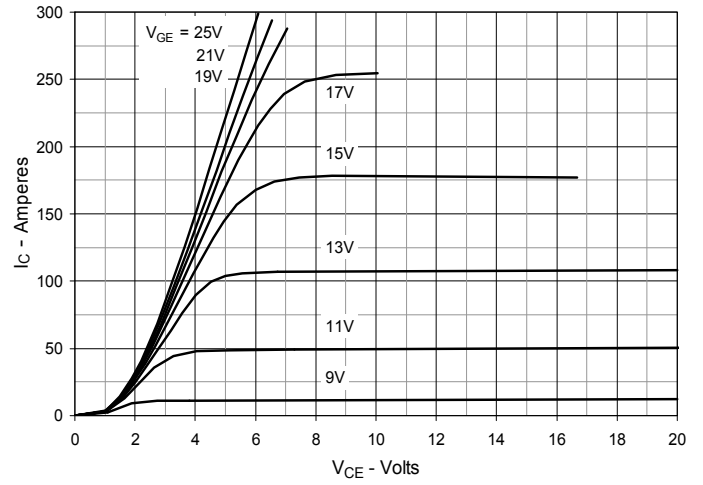


Fig. 3. Output Characteristics @ $T_J = 125^\circ\text{C}$

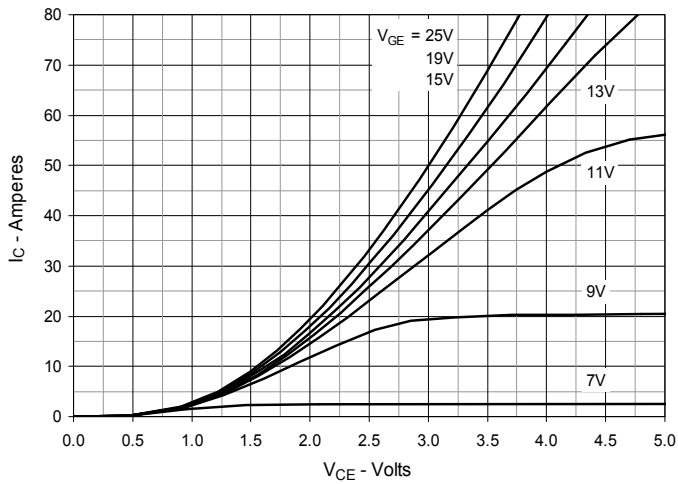


Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

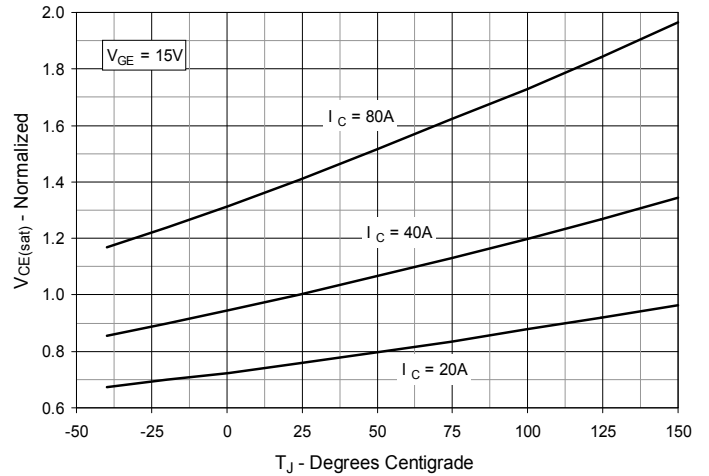


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

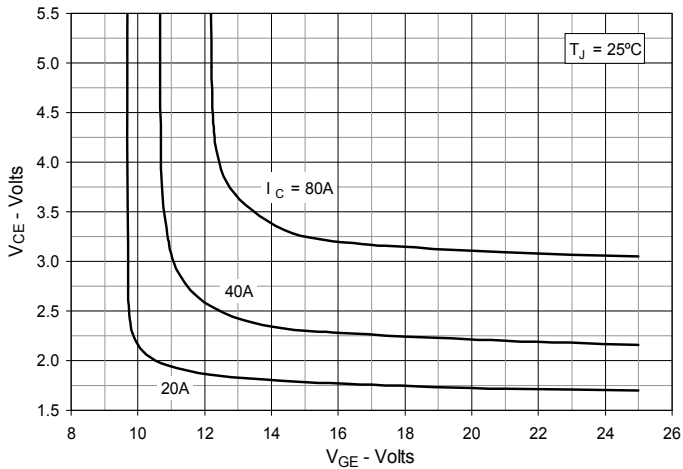


Fig. 6. Reverse-Bias Safe Operating Area

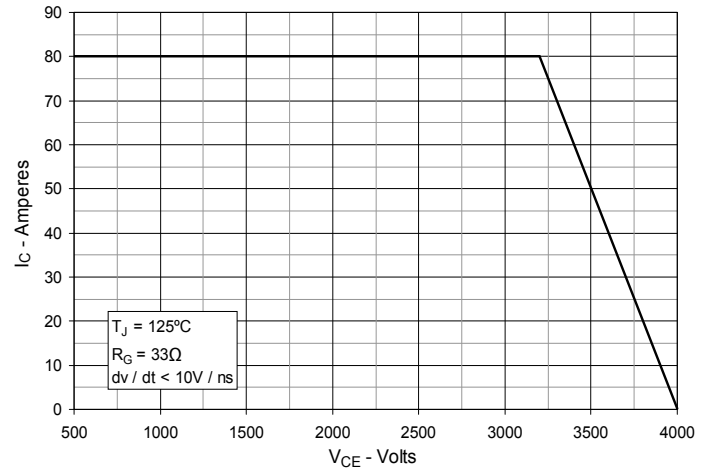


Fig. 7. Input Admittance

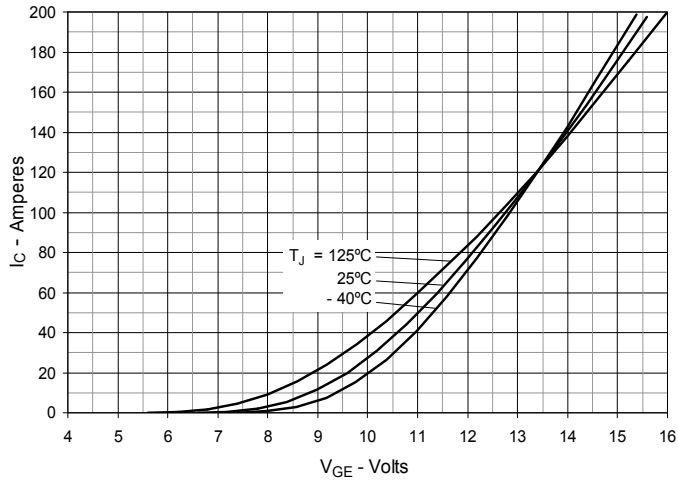


Fig. 8. Transconductance

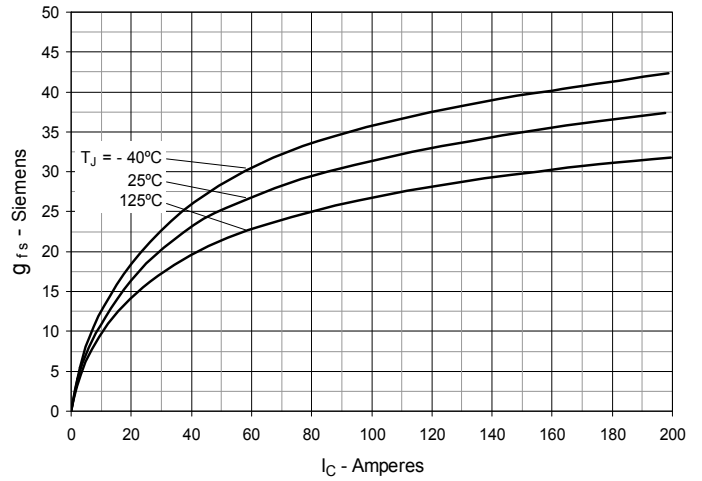


Fig. 9. Gate Charge

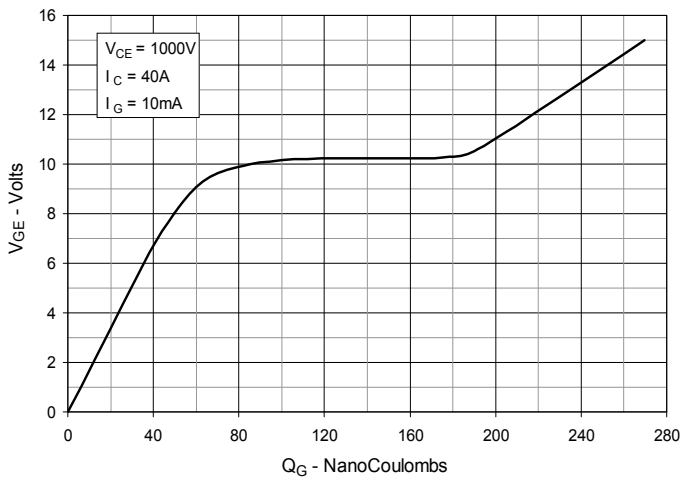


Fig. 10. Capacitance


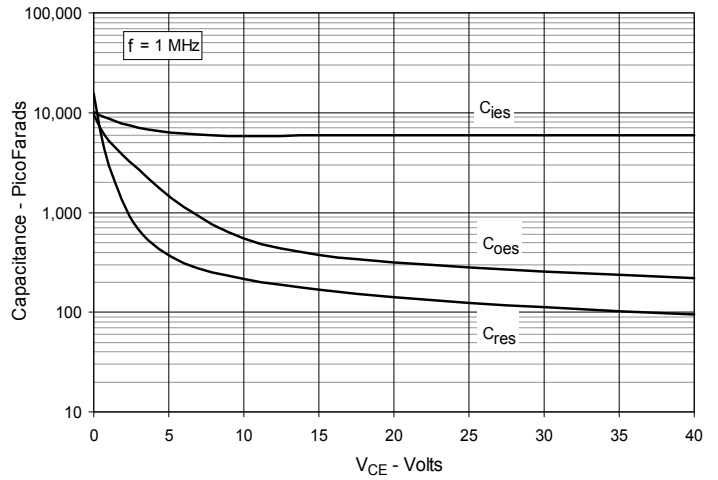


Fig. 11. Maximum Transient Thermal Impedance

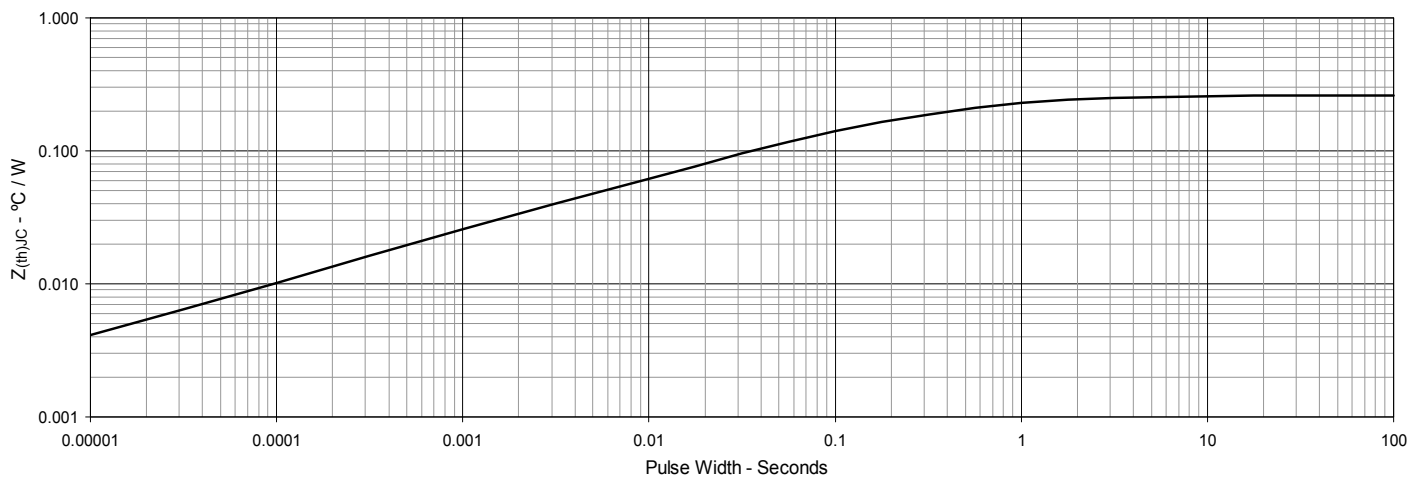

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.