

# NTHD3102C

## Power MOSFET

Complementary, 20 V, +5.5 A / -4.2 A,  
ChipFET™

### Features

- Complementary N-Channel and P-Channel MOSFET
- Small Size, 40% Smaller than TSOP-6 Package
- Leadless SMD Package Provides Great Thermal Characteristics
- Leading Edge Trench Technology for Low On Resistance
- Reduced Gate Charge to Improve Switching Response
- This is a Pb-Free Device

### Applications

- DC-DC Conversion Circuits
- Load/Power Switching
- Single or Dual Cell Li-Ion Battery Supplied Devices
- Ideal for Power Management Applications in Portable, Battery Powered Products

### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit	
Drain-to-Source Voltage	V <sub>DSS</sub>	20	V	
Gate-to-Source Voltage	N-Ch	±8.0	V	
	P-Ch	±8.0	V	
N-Channel Continuous Drain Current (Note 1)	Steady State	T <sub>A</sub> = 25°C	4.0	A
		T <sub>A</sub> = 85°C	2.9	
	t ≤ 5 s	T <sub>A</sub> = 25°C	5.5	
P-Channel Continuous Drain Current (Note 1)	Steady State	T <sub>A</sub> = 25°C	3.1	A
		T <sub>A</sub> = 85°C	2.2	
	t ≤ 5 s	T <sub>A</sub> = 25°C	4.2	
Power Dissipation (Note 1)	Steady State	T <sub>A</sub> = 25°C	1.1	W
		t ≤ 5 s	2.1	
Gate-to-Source ESD Rating – (Human Body Model, Method 3015)	ESD	100	V	

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Surface-mounted on FR4 board using 1 in sq pad size (Cu. area = 1.127 in sq [1 oz] including traces).




ON Semiconductor®

<http://onsemi.com>


V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> TYP	I <sub>D</sub> MAX (Note 1)
N-Channel 20 V	29 mΩ @ 4.5 V	5.5 A
	37 mΩ @ 2.5 V	
	48 mΩ @ 1.8 V	
P-Channel -20 V	64 mΩ @ 4.5 V	-4.2 A
	83 mΩ @ 2.5 V	
	105 mΩ @ 1.8 V	



N-Channel MOSFET




P-Channel MOSFET




ChipFET  
CASE 1206A  
STYLE 2

### PIN CONNECTIONS



(Bottom View)

### MARKING DIAGRAM



(Top View)

- D6 = Specific Device Code
- M = Date Code
- = Pb-Free Package

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 9 of this data sheet.

# NTHD3102C

## MAXIMUM RATINGS (continued) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter			Symbol	Value	Unit
N-Channel Continuous Drain Current (Note 3)	Steady State	$T_A = 25^\circ\text{C}$	$I_D$	3.0	A
		$T_A = 85^\circ\text{C}$		2.2	
P-Channel Continuous Drain Current (Note 3)	Steady State	$T_A = 25^\circ\text{C}$	$I_D$	2.3	A
		$T_A = 85^\circ\text{C}$		1.7	
Power Dissipation (Note 3)		$T_A = 25^\circ\text{C}$	$P_D$	0.6	W
Pulsed Drain Current	N-Ch	$t_p = 10 \mu\text{s}$	$I_{DM}$	16	A
	P-Ch			12.6	
Operating Junction and Storage Temperature			$T_J, T_{STG}$	-55 to 150	$^\circ\text{C}$
Source Current (Body Diode)			$I_S$	1.7	A
Lead Temperature for Soldering Purposes (1/8" from case for 10 seconds)			$T_L$	260	$^\circ\text{C}$

## THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max	Unit
Junction-to-Ambient – Steady State (Note 2)	$R_{\theta JA}$	110	$^\circ\text{C}/\text{W}$
Junction-to-Ambient – $t \leq 5 \text{ s}$ (Note 2)		60	
Junction-to-Ambient – Steady State (Note 3)		195	

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	N/P	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----	-----------------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage (Note 4)	$V_{(BR)DSS}$	N	$V_{GS} = 0 \text{ V}$	$I_D = 250 \mu\text{A}$	20		V
		P		$I_D = -250 \mu\text{A}$	-20		
Drain-to-Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$	N			20.2		mV/ $^\circ\text{C}$
		P			16.2		
Zero Gate Voltage Drain Current	$I_{DSS}$	N	$V_{GS} = 0 \text{ V}, V_{DS} = 16 \text{ V}$	$T_J = 25^\circ\text{C}$		1.0	$\mu\text{A}$
		P	$V_{GS} = 0 \text{ V}, V_{DS} = -16 \text{ V}$			-1.0	
		N	$V_{GS} = 0 \text{ V}, V_{DS} = 16 \text{ V}$	$T_J = 85^\circ\text{C}$		5.0	
		P	$V_{GS} = 0 \text{ V}, V_{DS} = -16 \text{ V}$			-5.0	
Gate-to-Source Leakage Current	$I_{GSS}$	N	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 8.0 \text{ V}$			$\pm 100$	nA
		P	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 8.0 \text{ V}$			$\pm 100$	

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

2. Surface-mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).
3. Surface-mounted on FR4 board using the minimum recommended pad size (Cu area = TBD in sq).
4. Switching characteristics are independent of operating junction temperatures.

# NTHD3102C

## ELECTRICAL CHARACTERISTICS (continued) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	N/P	Test Conditions	Min	Typ	Max	Unit
<b>ON CHARACTERISTICS</b> (Note 5)							
Gate Threshold Voltage	$V_{GS(TH)}$	N	$V_{GS} = V_{DS}$	$I_D = 250 \mu\text{A}$	0.4	1.2	V
		P		$I_D = -250 \mu\text{A}$	-0.4	-1.2	
Drain-to-Source On Resistance	$R_{DS(on)}$	N	$V_{GS} = 4.5 \text{ V}, I_D = 4.4 \text{ A}$		29	45	m $\Omega$
		P	$V_{GS} = -4.5 \text{ V}, I_D = -3.2 \text{ A}$		64	80	
		N	$V_{GS} = 2.5 \text{ V}, I_D = 4.1 \text{ A}$		37	50	
		P	$V_{GS} = -2.5 \text{ V}, I_D = -2.5 \text{ A}$		83	110	
		N	$V_{GS} = 1.8 \text{ V}, I_D = 1.9 \text{ A}$		48	70	
		P	$V_{GS} = -1.8 \text{ V}, I_D = -0.6 \text{ A}$		105	150	
Forward Transconductance	$g_{FS}$	N	$V_{DS} = 10 \text{ V}, I_D = 4.4 \text{ A}$		7.7		S
		P	$V_{DS} = -10 \text{ V}, I_D = -3.2 \text{ A}$		5.9		

## CHARGES, CAPACITANCES AND GATE RESISTANCE

Input Capacitance	$C_{ISS}$	N	$f = 1.0 \text{ MHz}, V_{GS} = 0 \text{ V}$	$V_{DS} = 10 \text{ V}$		510	pF
		P		$V_{DS} = -10 \text{ V}$		650	
Output Capacitance	$C_{OSS}$	N		$V_{DS} = 10 \text{ V}$		100	
		P		$V_{DS} = -10 \text{ V}$		100	
Reverse Transfer Capacitance	$C_{RSS}$	N		$V_{DS} = 10 \text{ V}$		50	
		P		$V_{DS} = -10 \text{ V}$		50	
Total Gate Charge	$Q_{G(TOT)}$	N	$V_{GS} = 4.5 \text{ V}, V_{DS} = 10 \text{ V}, I_D = 4.4 \text{ A}$		5.8	7.9	nC
		P	$V_{GS} = -4.5 \text{ V}, V_{DS} = -10 \text{ V}, I_D = -3.2 \text{ A}$		6.6	8.9	
Threshold Gate Charge	$Q_{G(TH)}$	N	$V_{GS} = 4.5 \text{ V}, V_{DS} = 10 \text{ V}, I_D = 4.4 \text{ A}$		0.96		
		P	$V_{GS} = -4.5 \text{ V}, V_{DS} = -10 \text{ V}, I_D = -3.2 \text{ A}$		0.98		
Gate-to-Source Charge	$Q_{GS}$	N	$V_{GS} = 4.5 \text{ V}, V_{DS} = 10 \text{ V}, I_D = 4.4 \text{ A}$		1.2		
		P	$V_{GS} = -4.5 \text{ V}, V_{DS} = -10 \text{ V}, I_D = -3.2 \text{ A}$		1.4		
Gate-to-Drain Charge	$Q_{GD}$	N	$V_{GS} = 4.5 \text{ V}, V_{DS} = 10 \text{ V}, I_D = 4.4 \text{ A}$		1.56		
		P	$V_{GS} = -4.5 \text{ V}, V_{DS} = -10 \text{ V}, I_D = -3.2 \text{ A}$		1.64		

## SWITCHING CHARACTERISTICS (Note 6)

Turn-On Delay Time	$t_{d(ON)}$	N	$V_{GS} = 4.5 \text{ V}, V_{DD} = 10 \text{ V}, I_D = 4.4 \text{ A}, R_G = 2.5 \Omega$		7.2	ns
Rise Time	$t_r$				15.9	
Turn-Off Delay Time	$t_{d(OFF)}$				15.7	
Fall Time	$t_f$				4.6	
Turn-On Delay Time	$t_{d(ON)}$	P	$V_{GS} = -4.5 \text{ V}, V_{DD} = -10 \text{ V}, I_D = -3.2 \text{ A}, R_G = 2.5 \Omega$		6.4	
Rise Time	$t_r$				16.9	
Turn-Off Delay Time	$t_{d(OFF)}$				16.4	
Fall Time	$t_f$				15.0	

5. Pulse Test: pulse width  $\leq 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. Switching characteristics are independent of operating junction temperatures.

# NTHD3102C

## ELECTRICAL CHARACTERISTICS (continued) ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	N/P	Test Conditions	Min	Typ	Max	Unit
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>							
Forward Diode Voltage	$V_{SD}$	N	$V_{GS} = 0\text{ V}, T_J = 25^\circ\text{C}$	$I_S = 1.7\text{ A}$	0.68	1.2	V
		P		$I_S = -1.7\text{ A}$	-0.7	-1.2	
Reverse Recovery Time	$t_{RR}$	N	$V_{GS} = 0\text{ V},$ $dI_S / dt = 100\text{ A}/\mu\text{s}$	$I_S = 1.7\text{ A}$	13.5		ns
		P		$I_S = -1.7\text{ A}$	12.6		
Charge Time	$t_a$	N		$I_S = 1.7\text{ A}$	8.6		
		P		$I_S = -1.7\text{ A}$	8.4		
Discharge Time	$t_b$	N		$I_S = 1.7\text{ A}$	4.9		
		P		$I_S = -1.7\text{ A}$	4.2		
Reverse Recovery Charge	$Q_{RR}$	N		$I_S = 1.7\text{ A}$	7.0		nC
		P		$I_S = -1.7\text{ A}$	6.0		

# NTHD3102C

## TYPICAL N-CHANNEL PERFORMANCE CURVES

( $T_J = 25^\circ\text{C}$  unless otherwise noted)

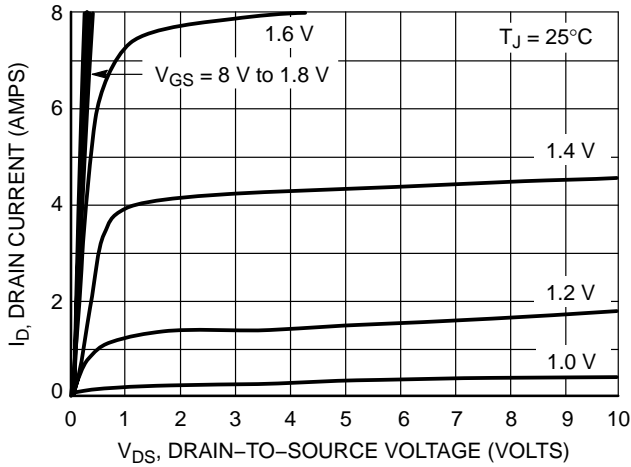


Figure 1. On-Region Characteristics

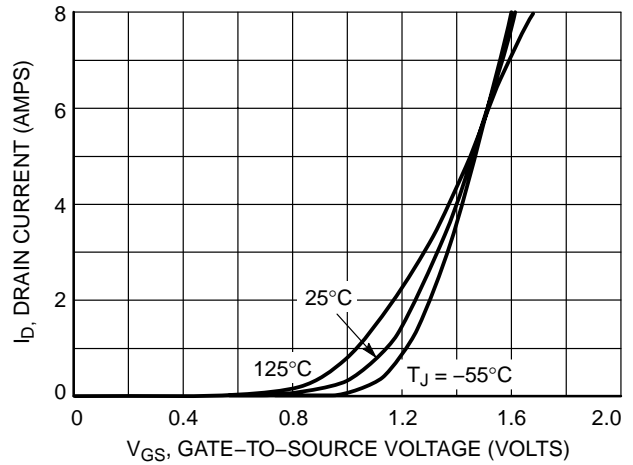


Figure 2. Transfer Characteristics

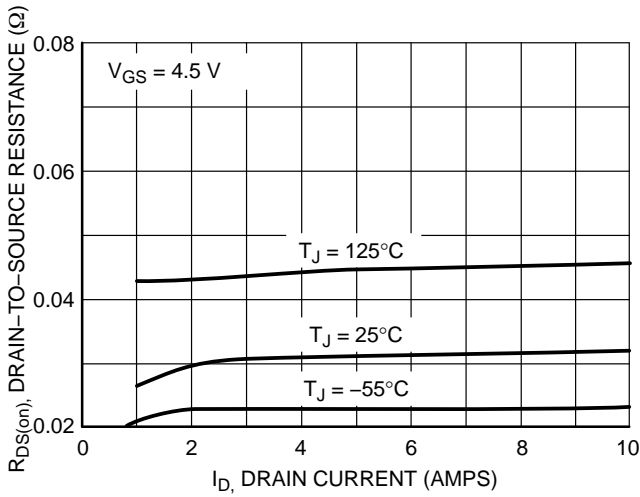


Figure 3. On-Resistance vs. Drain Current

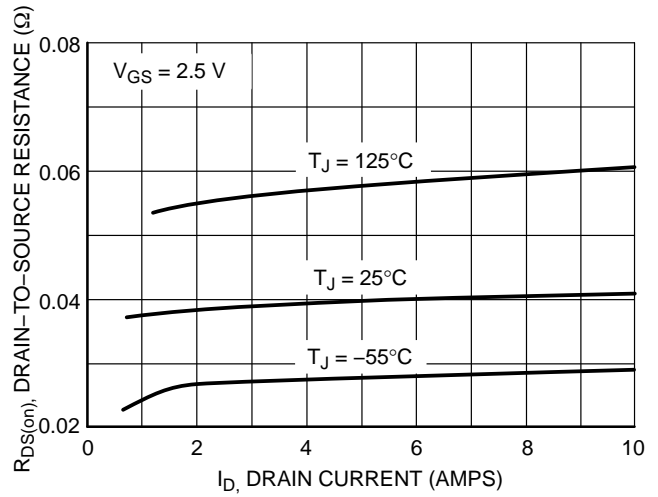


Figure 4. On-Resistance vs. Drain Current and Temperature

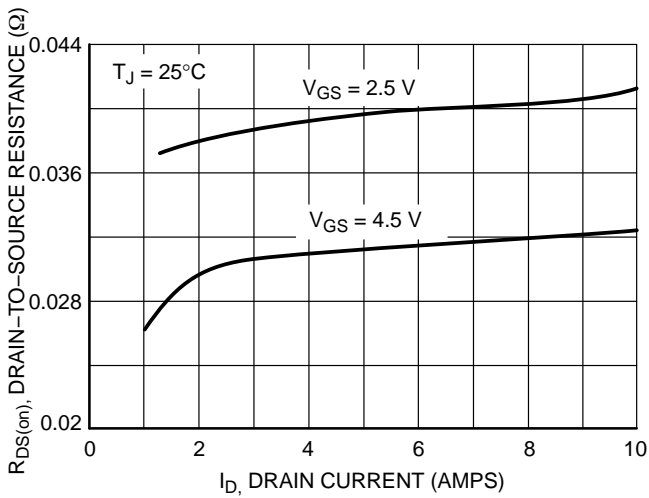


Figure 5. On-Resistance vs. Drain Current


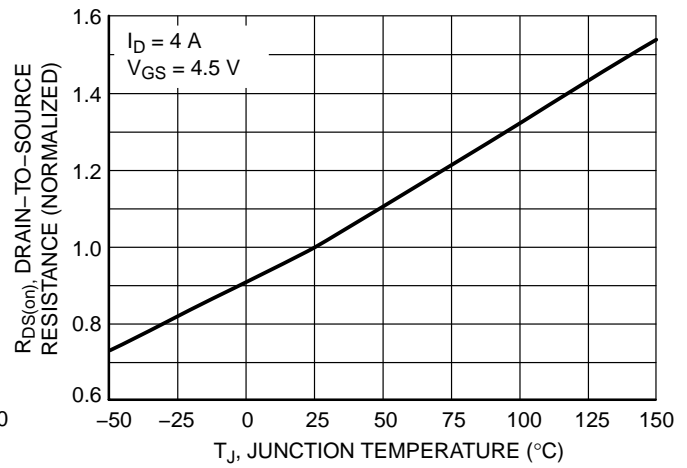


Figure 6. On-Resistance Variation with Temperature


# NTHD3102C

## TYPICAL N-CHANNEL PERFORMANCE CURVES


( $T_J = 25^\circ\text{C}$  unless otherwise noted)

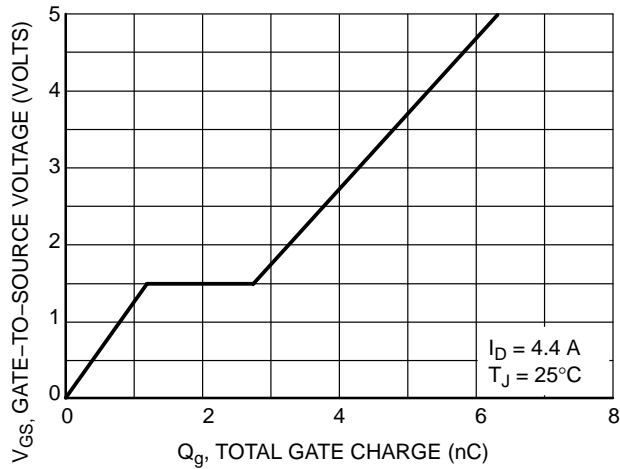


**Figure 7. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge**

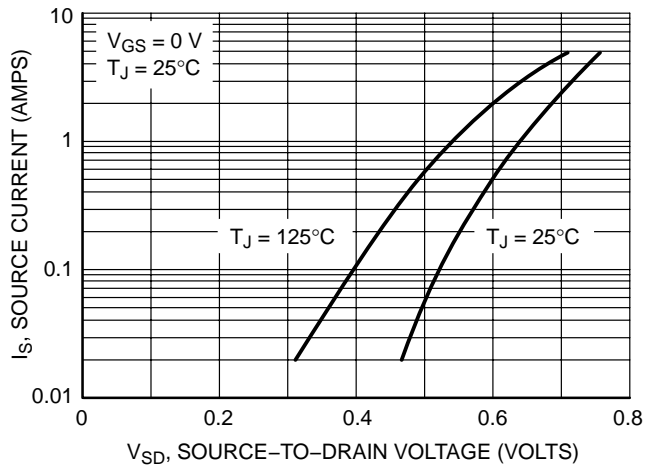


**Figure 8. Diode Forward Voltage vs. Current**

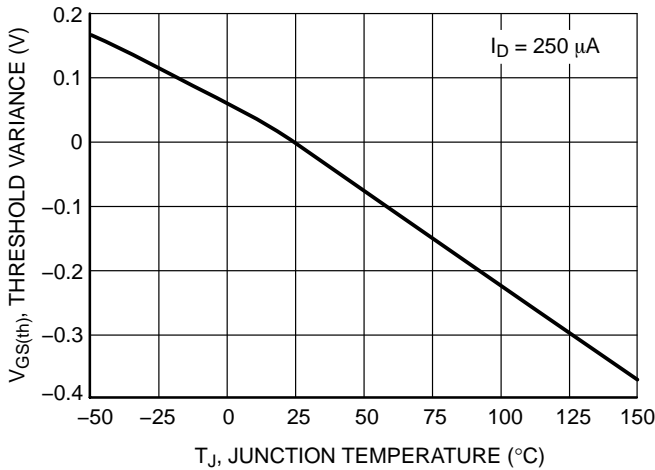

**Figure 9. Threshold Voltage**

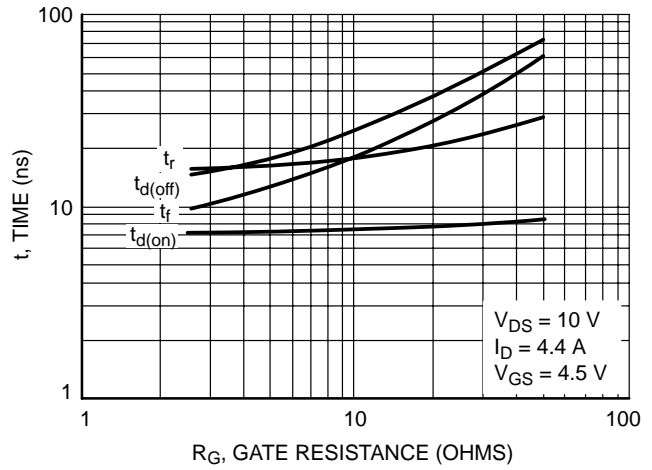

**Figure 10. Resistive Switching Time Variation vs. Gate Resistance**

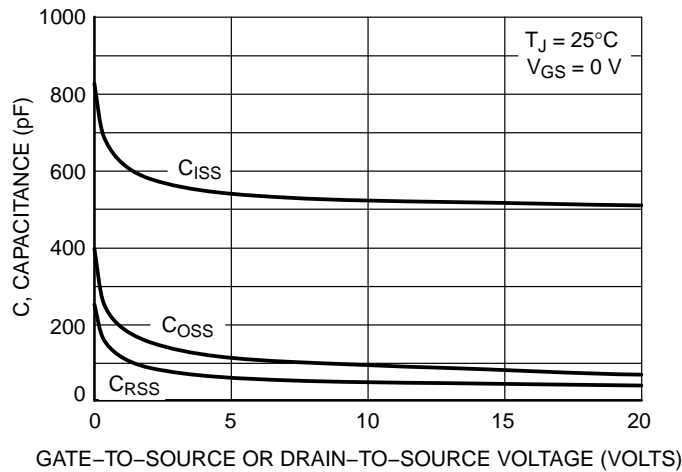

**Figure 11. Capacitance Variation**

# NTHD3102C

## TYPICAL P-CHANNEL PERFORMANCE CURVES

( $T_J = 25^\circ\text{C}$  unless otherwise noted)

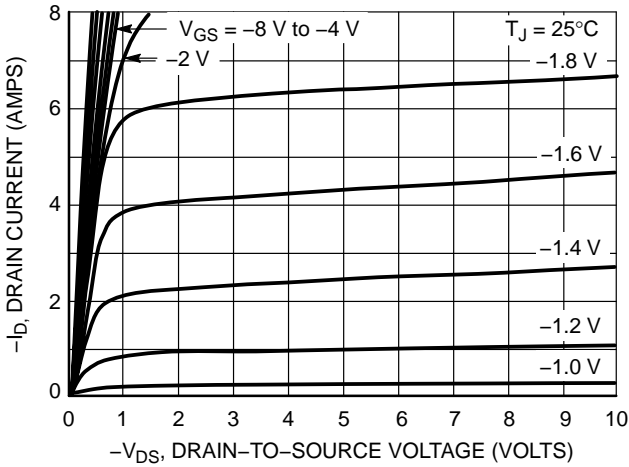


Figure 12. On-Region Characteristics

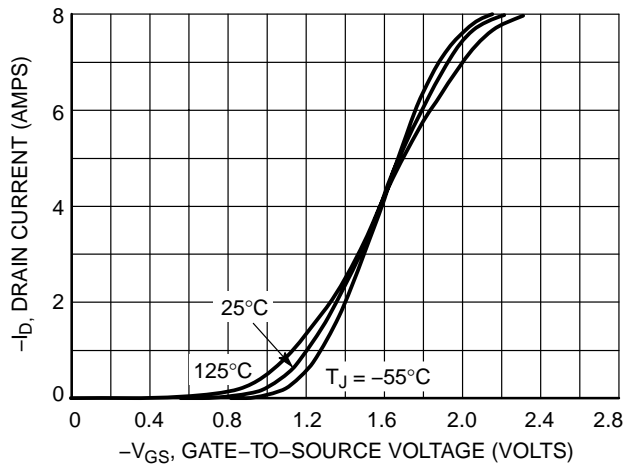


Figure 13. Transfer Characteristics

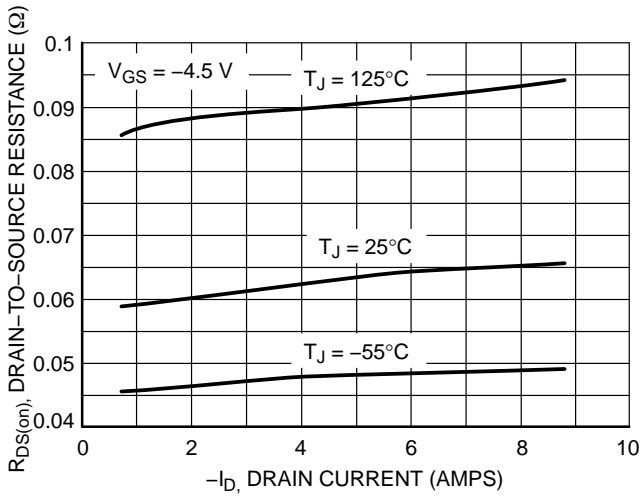


Figure 14. On-Resistance vs. Drain Current

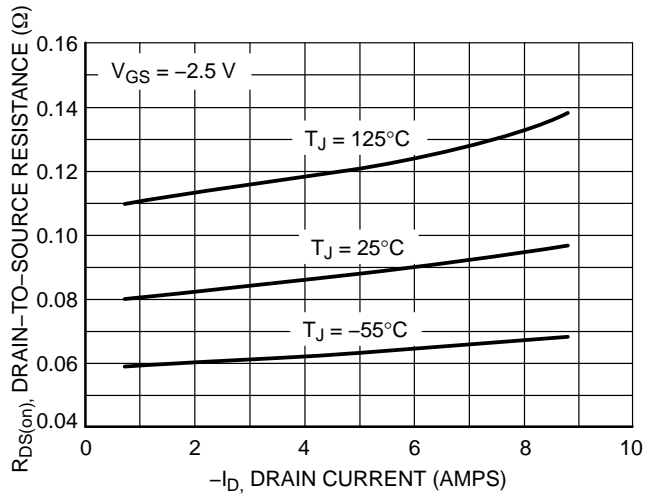


Figure 15. On-Resistance vs. Drain Current and Temperature

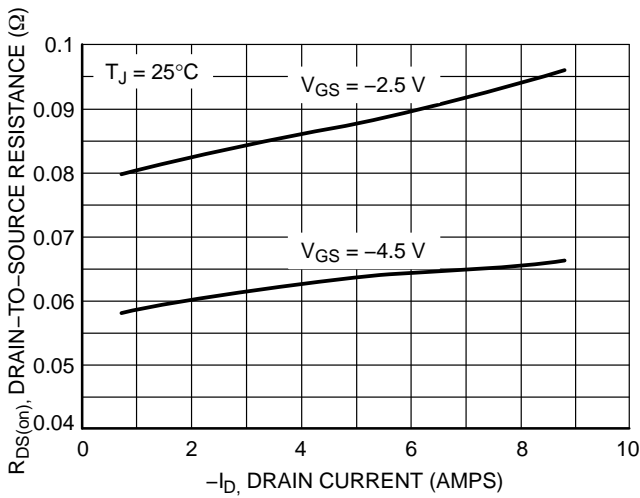


Figure 16. On-Resistance vs. Drain Current

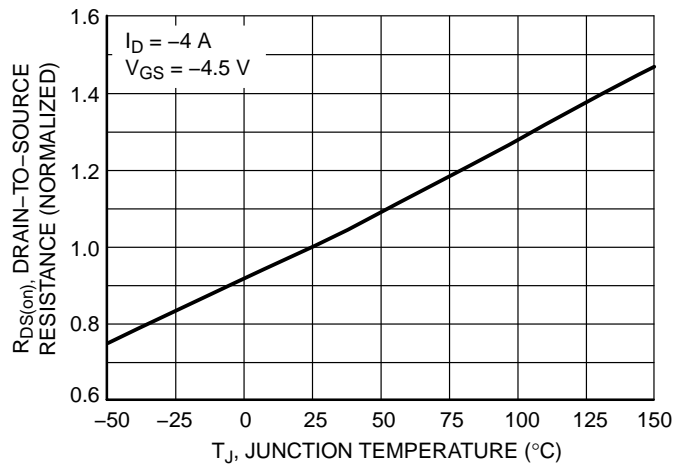


Figure 17. On-Resistance Variation with Temperature

TYPICAL P-CHANNEL PERFORMANCE CURVES

( $T_J = 25^\circ\text{C}$  unless otherwise noted)

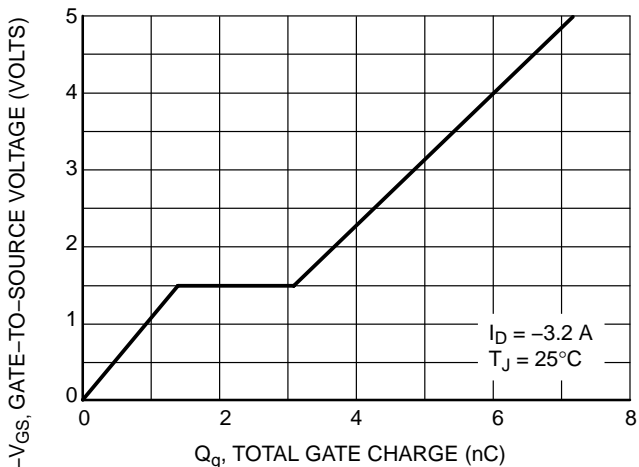


Figure 18. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

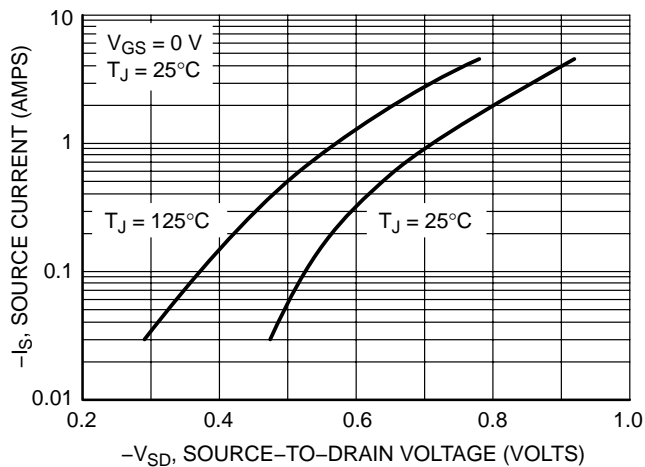


Figure 19. Diode Forward Voltage vs. Current

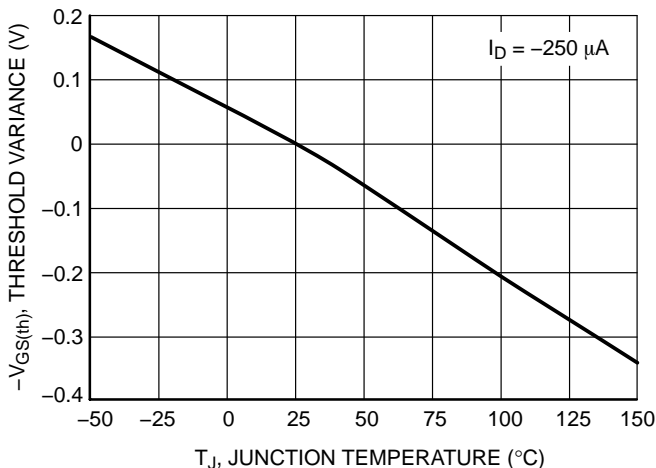


Figure 20. Threshold Voltage

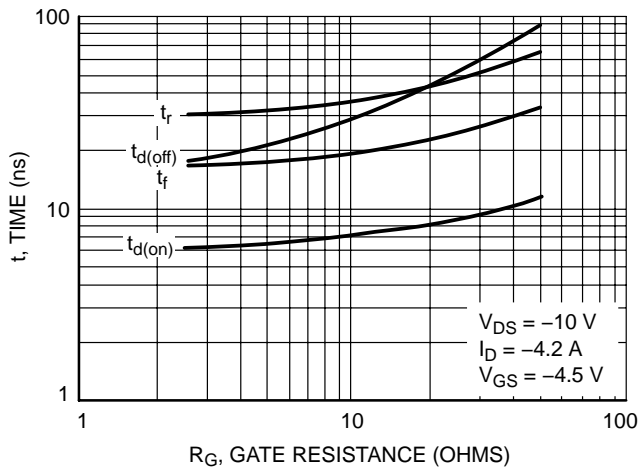


Figure 21. Resistive Switching Time Variation vs. Gate Resistance

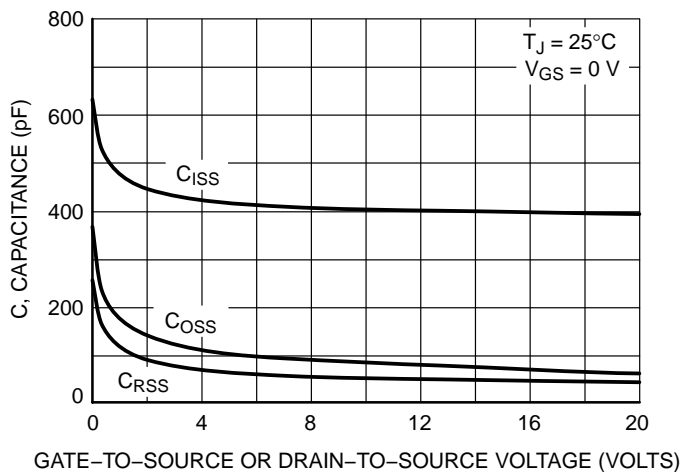


Figure 22. Capacitance Variation



# NTHD3102C

## TYPICAL PERFORMANCE CURVES

( $T_J = 25^\circ\text{C}$  unless otherwise noted)

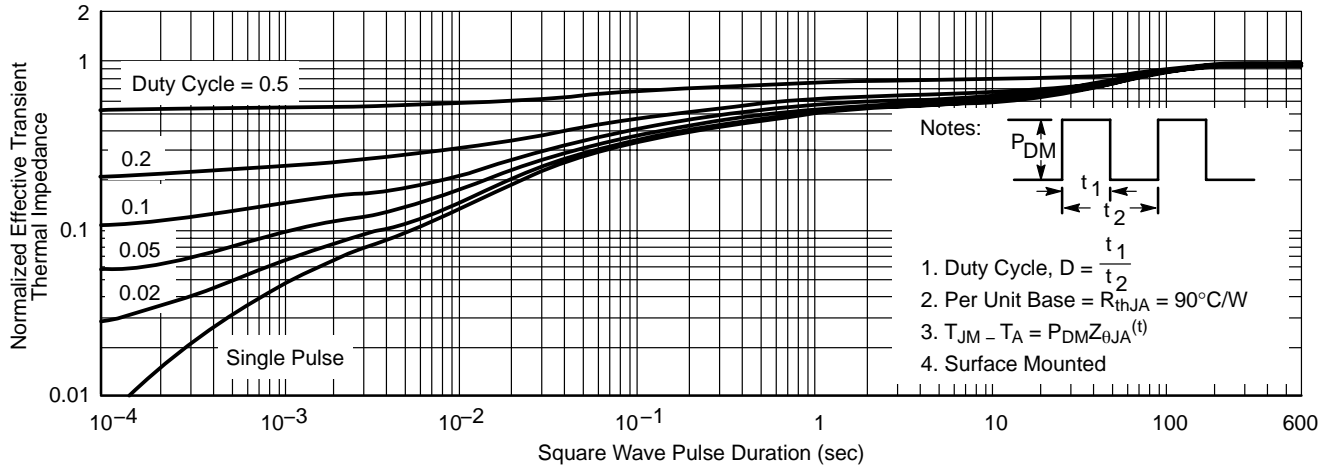


Figure 23. Thermal Response

### ORDERING INFORMATION


Device	Package	Shipping†
NTHD3102CT1G	ChipFET (Pb-Free)	3000 Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# NTHD3102C

## PACKAGE DIMENSIONS

ChipFET™  
CASE 1206A-03  
ISSUE G

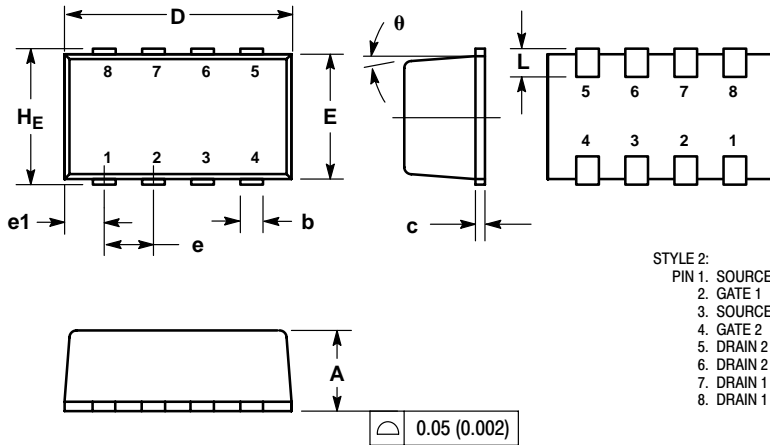


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MOLD GATE BURRS SHALL NOT EXCEED 0.13 MM PER SIDE.
4. LEADFRAME TO MOLDED BODY OFFSET IN HORIZONTAL AND VERTICAL SHALL NOT EXCEED 0.08 MM.
5. DIMENSIONS A AND B EXCLUSIVE OF MOLD GATE BURRS.
6. NO MOLD FLASH ALLOWED ON THE TOP AND BOTTOM LEAD SURFACE.


DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.00	1.05	1.10	0.039	0.041	0.043
b	0.25	0.30	0.35	0.010	0.012	0.014
c	0.10	0.15	0.20	0.004	0.006	0.008
D	2.95	3.05	3.10	0.116	0.120	0.122
E	1.55	1.65	1.70	0.061	0.065	0.067
e	0.65 BSC			0.025 BSC		
e1	0.55 BSC			0.022 BSC		
L	0.28	0.35	0.42	0.011	0.014	0.017
H <sub>E</sub>	1.80	1.90	2.00	0.071	0.075	0.079
θ	5° NOM			5° NOM		

- STYLE 2:  
PIN 1. SOURCE 1  
2. GATE 1  
3. SOURCE 2  
4. GATE 2  
5. DRAIN 2  
6. DRAIN 2  
7. DRAIN 1  
8. DRAIN 1

### SOLDERING FOOTPRINT\*

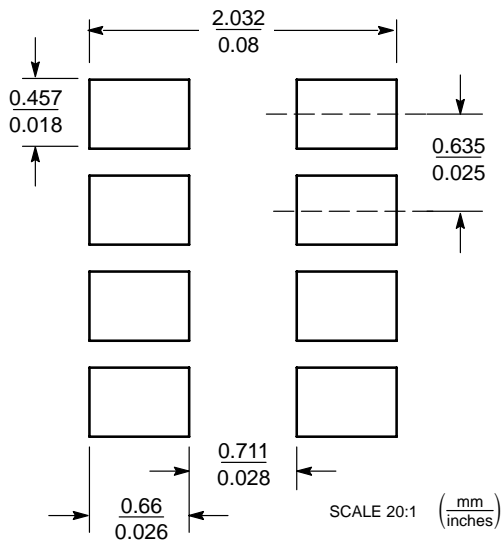

**Basic**

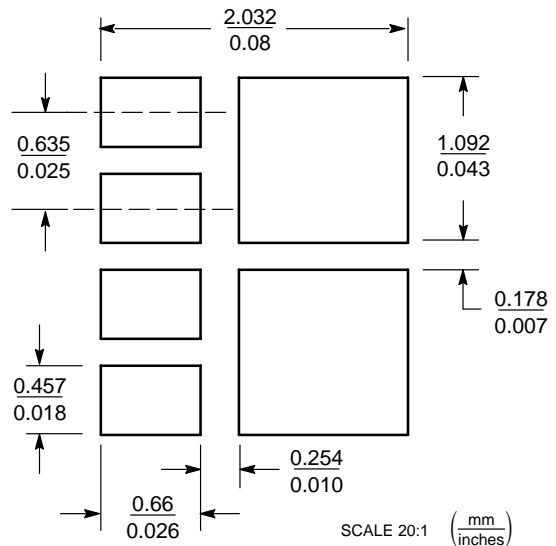


**Style 2**

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NTHD3102C

ChipFET is a trademark of Vishay Siliconix.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

**NTHD3102C/D**