

FDC6392S

20V Integrated P-Channel PowerTrench® MOSFET and Schottky Diode

General Description

The FDC6392S combines the exceptional performance of Fairchild's PowerTrench MOSFET technology with a very low forward voltage drop Schottky barrier rectifier in an SSOT-6 package.

This device is designed specifically as a single package solution for DC to DC converters. It features a fast switching, low gate charge MOSFET with very low on-state resistance. The independently connected Schottky diode allows its use in a variety of DC/DC converter topologies.


Features

MOSFET:


- -2.2 A, -20V. $R_{DS(ON)} = 150\text{ m}\Omega @ V_{GS} = -4.5\text{V}$
 $R_{DS(ON)} = 200\text{ m}\Omega @ V_{GS} = -2.5\text{V}$
- Low Gate Charge (3.7nC typ)
- Compact industry standard SuperSOT™-6 package

Schottky:

- $V_F < 0.45\text{ V} @ 1\text{ A}$



SuperSOT™-6



Absolute Maximum Ratings T_A=25°C unless otherwise noted

| Symbol | Parameter | Ratings | Units |
|-----------------------------------|--|-------------|-------|
| V _{DSS} | MOSFET Drain-Source Voltage | -20 | V |
| V _{GSS} | MOSFET Gate-Source Voltage | ±12 | V |
| I _D | Drain Current – Continuous (Note 1a) | -2.2 | A |
| | – Pulsed | -6 | |
| P _D | Power Dissipation for Single Operation (Note 1a) | 0.96 | W |
| | (Note 1b) | 0.9 | |
| | (Note 1c) | 0.7 | |
| T _J , T _{STG} | Operating and Storage Junction Temperature Range | -55 to +150 | °C |
| V _{RRM} | Schottky Repetitive Peak Reverse Voltage | 20 | V |
| I _O | Schottky Average Forward Current (Note 1a) | 1 | A |

Thermal Characteristics

| | | | |
|------------------|---|-----|------|
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1a) | 130 | °C/W |
| R _{θJC} | Thermal Resistance, Junction-to-Case (Note 1) | 60 | |

Package Marking and Ordering Information

| Device Marking | Device | Reel Size | Tape width | Quantity |
|----------------|----------|-----------|------------|------------|
| .392 | FDC6392S | 7" | 8mm | 3000 units |

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted


| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|---|---|--|---------------------------|-------------------|-------------------|----------------------|
| Off Characteristics | | | | | | |
| BV_{DSS} | Drain–Source Breakdown Voltage | $V_{GS} = 0\text{ V}, I_D = -250\ \mu\text{A}$ | -20 | | | V |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = -250\ \mu\text{A}$, Referenced to 25°C | | -16 | | mV/ $^\circ\text{C}$ |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = -16\text{ V}, V_{GS} = 0\text{ V}$ | | | -1 | μA |
| I_{GSSF} | Gate–Body Leakage, Forward | $V_{GS} = 12\text{ V}, V_{DS} = 0\text{ V}$ | | | 100 | nA |
| I_{GSSR} | Gate–Body Leakage, Reverse | $V_{GS} = -12\text{ V}, V_{DS} = 0\text{ V}$ | | | -100 | nA |
| On Characteristics (Note 2) | | | | | | |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$ | -0.6 | -1.0 | -1.5 | V |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate Threshold Voltage Temperature Coefficient | $I_D = -250\ \mu\text{A}$, Referenced to 25°C | | 3 | | mV/ $^\circ\text{C}$ |
| $R_{DS(on)}$ | Static Drain–Source On–Resistance | $V_{GS} = -4.5\text{ V}, I_D = -2.2\text{ A}$ $V_{GS} = -2.5\text{ V}, I_D = -1.8\text{ A}$ $V_{GS} = -4.5\text{ V}, I_D = -2.2\text{ A}, T_J = 125^\circ\text{C}$ | | 101 152 132 | 150 200 211 | m Ω |
| $I_{D(on)}$ | On–State Drain Current | $V_{GS} = -4.5\text{ V}, V_{DS} = -5\text{ V}$ | -6 | | | A |
| g_{FS} | Forward Transconductance | $V_{DS} = -5\text{ V}, I_D = -2.2\text{ A}$ | | 6 | | S |
| Dynamic Characteristics | | | | | | |
| C_{iss} | Input Capacitance | $V_{DS} = -10\text{ V}, V_{GS} = 0\text{ V},$ $f = 1.0\text{ MHz}$ | | 369 | | pF |
| C_{oss} | Output Capacitance | | | 80 | | pF |
| C_{rss} | Reverse Transfer Capacitance | | | 39 | | pF |
| R_G | Gate Resistance | $V_{GS} = -15\text{ mV}, f = 1.0\text{ MHz}$ | | 7.6 | | Ω |
| Switching Characteristics (Note 2) | | | | | | |
| $t_{d(on)}$ | Turn–On Delay Time | $V_{DD} = -10\text{ V}, I_D = -1\text{ A},$ $V_{GS} = -4.5\text{ V}, R_{GEN} = 6\ \Omega$ | | 8 | 16 | ns |
| t_r | Turn–On Rise Time | | | 11 | 20 | ns |
| $t_{d(off)}$ | Turn–Off Delay Time | | | 13 | 23 | ns |
| t_f | Turn–Off Fall Time | | | 4 | 8 | ns |
| Q_g | Total Gate Charge | $V_{DS} = -10\text{ V}, I_D = -2.2\text{ A},$ $V_{GS} = -4.5\text{ V}$ | | 3.7 | 5.2 | nC |
| Q_{gs} | Gate–Source Charge | | | 1 | | nC |
| Q_{gd} | Gate–Drain Charge | | | 1 | | nC |
| Drain–Source Diode Characteristics and Maximum Ratings | | | | | | |
| I_S | Maximum Continuous Drain–Source Diode Forward Current | | | | -0.8 | A |
| V_{SD} | Drain–Source Diode Forward Voltage | $V_{GS} = 0\text{ V}, I_S = -0.8\text{ A (Note 2)}$ | | -0.8 | -1.2 | V |
| t_{rr} | Diode Reverse Recovery Time | $I_F = -2.2\text{ A},$ $dI_F/dt = 100\text{ A}/\mu\text{s}$ | | 5.4 | | nS |
| Q_{rr} | Diode Reverse Recovery Charge | | | 1.2 | | nC |
| Schottky Diode Characteristics | | | | | | |
| I_R | Reverse Leakage | $V_R = 20\text{ V}$ | $T_J = 25^\circ\text{C}$ | 148 | 400 | μA |
| | | | $T_J = 100^\circ\text{C}$ | 14 | 20 | mA |
| | | $V_R = 10\text{ V}$ | $T_J = 25^\circ\text{C}$ | 55 | 200 | μA |
| | | | $T_J = 100^\circ\text{C}$ | 5.2 | 10 | mA |
| V_F | Forward Voltage | $I_F = 500\text{ mA}$ | $T_J = 25^\circ\text{C}$ | 0.34 | 0.4 | V |
| | | | $T_J = 100^\circ\text{C}$ | 0.26 | 0.35 | |
| | | $I_F = 1\text{ A}$ | $T_J = 25^\circ\text{C}$ | 0.40 | 0.45 | V |
| | | | $T_J = 100^\circ\text{C}$ | 0.35 | 0.42 | |

Electrical Characteristics


$T_A = 25^\circ\text{C}$ unless otherwise noted

Notes:


1. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



- a) 130°C/W when mounted on a 0.125 in^2 pad of 2 oz. copper.



- b) 140°C/W when mounted on a $.004\text{ in}^2$ pad of 2 oz copper



- c) 180°C/W when mounted on a minimum pad.

Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width $< 300\mu\text{s}$, Duty Cycle $< 2.0\%$

Typical Characteristics

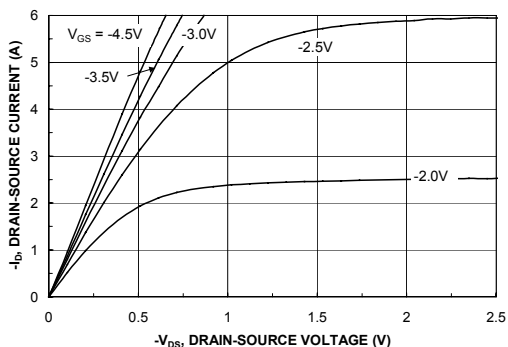


Figure 1. On-Region Characteristics.

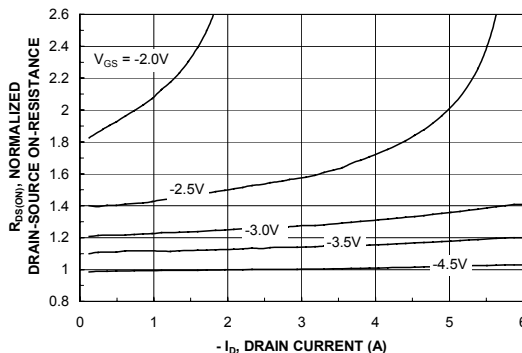


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

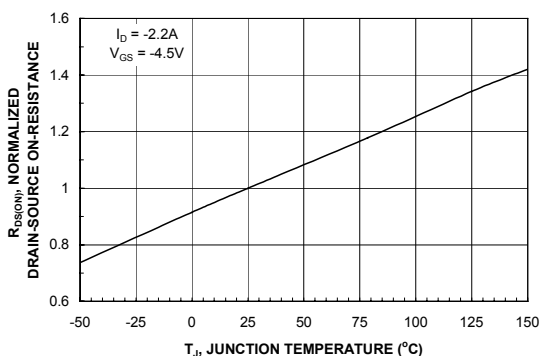


Figure 3. On-Resistance Variation with Temperature.

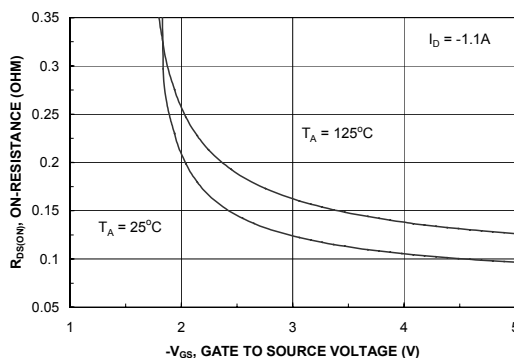


Figure 4. On-Resistance Variation with Gate-to-Source Voltage.

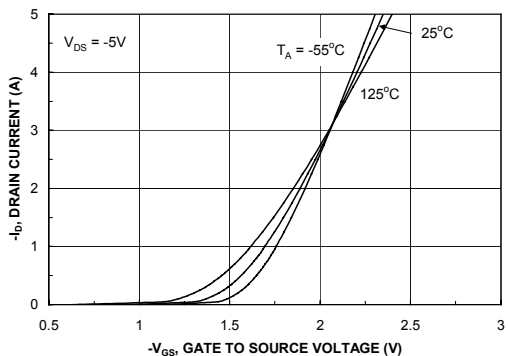


Figure 5. Transfer Characteristics.

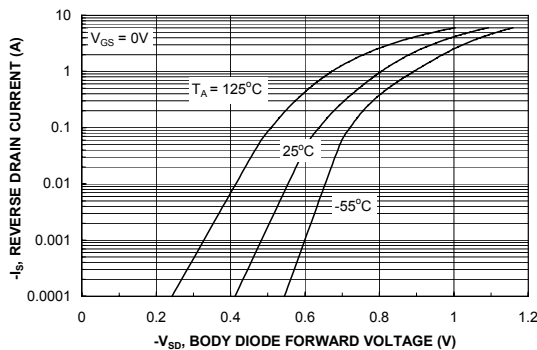


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

Typical Characteristics

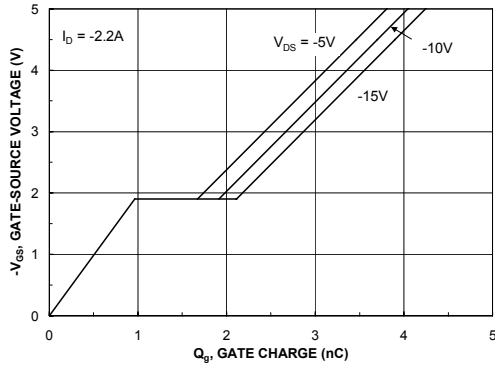


Figure 7. Gate Charge Characteristics.

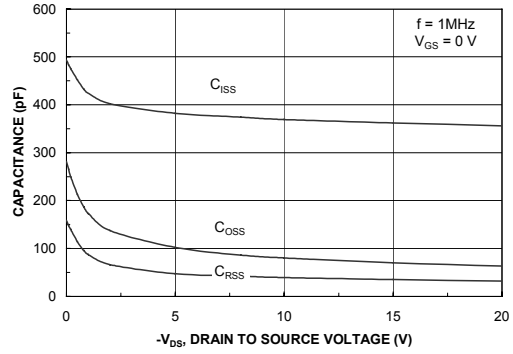


Figure 8. Capacitance Characteristics.

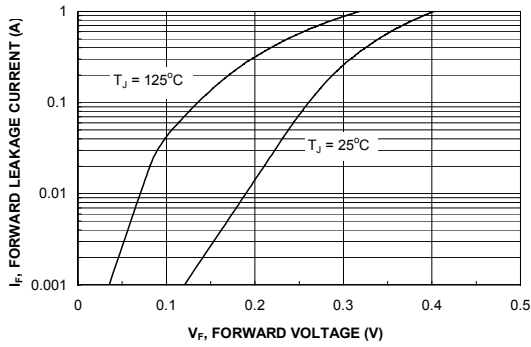


Figure 9. Schottky Diode Forward Voltage.

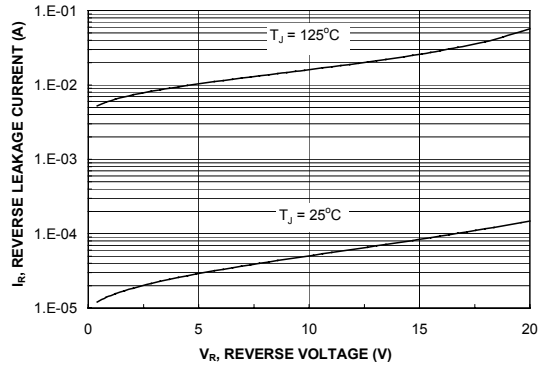


Figure 10. Schottky Diode Reverse Current.

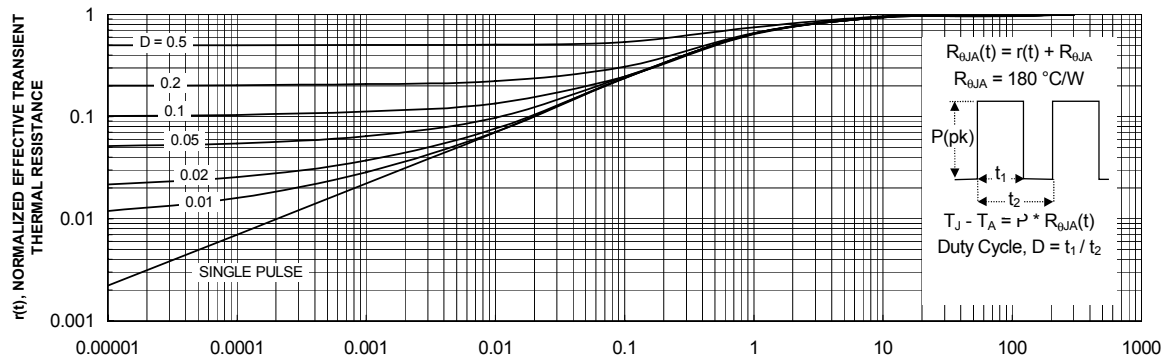


Figure 11. Transient Thermal Response Curve.

Thermal characterization performed using the conditions described in Note 1c.
Transient thermal response will change depending on the circuit board design.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | | | | |
|----------------------------------|---------------------------------|---------------------------------|------------------------------|-----------------------|
| ACE _x [™] | FAST [®] | MICROWIRE [™] | SILENT SWITCHER [®] | UHC [™] |
| Bottomless [™] | FAST _r [™] | OPTOLOGIC [®] | SMART START [™] | UltraFET [®] |
| CoolFET [™] | FRFET [™] | OPTOPLANAR [™] | SPM [™] | VCX [™] |
| CROSSVOLT [™] | GlobalOptoisolator [™] | PACMAN [™] | STAR*POWER [™] | |
| DenseTrench [™] | GTO [™] | POP [™] | Stealth [™] | |
| DOME [™] | HiSeC [™] | Power247 [™] | SuperSOT [™] -3 | |
| EcoSPARK [™] | I ² C [™] | PowerTrench [®] | SuperSOT [™] -6 | |
| E ² CMOS [™] | ISOPLANAR [™] | QFET [™] | SuperSOT [™] -8 | |
| EnSigna [™] | LittleFET [™] | QS [™] | SyncFET [™] | |
| FACT [™] | MicroFET [™] | QT Optoelectronics [™] | TinyLogic [™] | |
| FACT Quiet Series [™] | MicroPak [™] | Quiet Series [™] | TruTranslation [™] | |

STAR*POWER is used under license

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|---|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only. |

Rev. H5