

To: **Digi - Key**

Issue No. : EFJ-C060530-02H
Date of Issue : May 30.2006
Classification : New Changed

PRODUCT SPECIFICATION FOR APPROVAL

Product Description : Ceramic Resonator
Product Part Number : EFJC1695B5B(Bulk type)
EFJC1695E5B(Taped type)

Customers Part Number :
Country of Origin : Indonesia(marked on packing label by English)
Applications :

※If you approve this specification, please fill in and sign the below and return 1copy to us.

Approval No	:	
Approval Date	:	
Executed by	:	


		(signature)
Title	:	
Dept.	:	

Prepared by : Engineering Section
Phone : +81-123-22-8769 (Direct)
Fax : +81-123-22-9484 (Direct)

Capacitor Business Unit
Panasonic Electronic Devices Co.,Ltd
25.Kohata-nishinaka..Uji City , Kyoto, Japan

Phone : +81-774-32-1111(Representative)

Contact Person : *K. Matsuno*
Title : Engineer

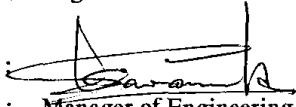Authorized by : 
Title : Manager of Engineering

If there is a question, please ask the engineering section about it directly.

Panasonic

1.Scope

This Specification relates to the ceramic resonator intended to be used as time base oscillator of a microcomputer, microcontroller etc.

2.Appearance and Size

Item	Specification
2.1 Appearance	No remarkable damage or dirt
2.2 Shape/Size	As per Fig.1 attached
2.3 Marking	Frequency code, date code as per Fig.1 attached


3.Electrical Performance

Item	Specification
3.1 Nominal Oscillating frequency(f ₀)	16.93MHz
3.2 Frequency initial tolerance	±0.5% max.
3.3 Loop gain (G)	10dB min.
3.4 Built-in Load Capacitance(C1, C2)	8pF(ref)
3.5 Withstanding voltage	DC 50V, 1 minute max.
3.6 Rated Working Voltage (1) Maximum input DC voltage (2) Maximum input AC voltage	DC 6V 10Vp-p
3.7 Insulation Resistance	500MΩ min. A voltage of 10V d.c. shall be applied for 1 min, after which measurement shall be made between terminals.
3.8 Operating temperature range	-20C to +80C
3.9 Storage temperature range	-40C to +85C

3.10 Frequency shift by Temperature (-20C to +80C)	±0.2%max. (from initial value)
3.11 Secular Change of frequency (for 10 years)	±0.2%max. (from initial value)

4. Mechanical Performance

Item	Test Condition	Specification
4.1 Random Drop	Three times random drop from the height of 1m onto concrete floor	The measured value shall meet Table 1.
4.2 Vibration	Vibration Amplitude of 1.5mm with 10 to 55Hz band, each of X,Y,Z directions for 2 hours	The measured value shall meet Table 1.
4.3 Bend Strength	Soldered onto the center of 1.6mm thick PCB which is laid on the 2 small supporters spaced 90mm. PCB is deflected to 1mm below and held 10±0.5 second with 1mm/sec.	The measured value shall meet Table 1.
4.4 Resistance to soldering heat	Two times heat stresses with following profile 1.Pre-heating: 175±5C; 60 to 120seconds 2.Keep-time over 220C; 20sec.max Peak temperature; lower than 250C	The measured value shall meet Table 1.

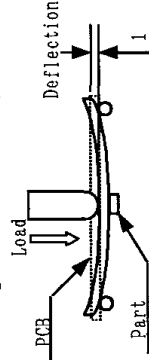

CLASSIFICATION	SPECIFICATIONS	Date	May, 30, 2006
Part name	Ceramic Resonator	APPROVAL	CHECK
Part No.	Bulk Type	EFJC1695B5B	<i>[Signature]</i>
	Taped Type	EFJC1695E5B	
Spec No.	151S-EFJ-CA01-1695-01E	DESIGN	<i>[Signature]</i>

4.5	Solderability	Terminals are immersed in rosin and immersed in soldering bath of 230±5C for 3±0.5 seconds	75% min. terminals shall be wet with new solder.
-----	---------------	--	--

6. Measuring method

6-1 Oscillating frequency
See Figure 2.

6-2 Loop gain

Connect a product to the loop gain test circuit in Fig.3, and when inputting the specified sweep signal into the input terminal measure the maximum value of the This value shall be expressed in dB. the nominal frequency.

6-3 Measuring condition

20±2C, 60 to 70 % RH, 860 to 1060 hPa as a rule; however, if there occurs no doubt about judgement, the test may be performed at 5 to 35 C and 40 to 80% RH.
As for Resistance to soldering heat, Dry heat test, Cold test, Damp test and Heat cycle, resonator shall be measured after being placed in natural condition for 2 hours.

7. Packaging

7.1 Bulk type

1) Packaging quantity

A package shall contain 500 pieces.
Part Number, Quantity, Lot No. and Manufacturer's Name shall be marked on the package side.

2) Packaging method

The package shall be no mechanical damage on resonators during transportation and/or in storage.

5. Environmental Performance

Item	Test Condition	Specification
5.1	Dry heat test Placed in a chamber with 85±2C for 1000hr	The measured value shall meet Table 1.
5.2	Cold test Placed in a chamber with -40±3C for 1000hr	The measured value shall meet Table 1.
5.3	Damp heat Placed in a chamber with 90 to 95% RH at 60±2C for 500hr	The measured value shall meet Table 1.
5.4	Heat cycle 100cycles heat stresses with following profile 85±3C 30minutes, 1 to 2 minutes transit time, -40±3C 30minutes	The measured value shall meet Table 1.

Table 1

Item	Specification after Test
Oscillating frequency	±0.3%max. (from initial value)
Loop gain	±3dBmax. (from initial value)

10. Precautions for Handling

10.1 Limitation of Application

This ceramic resonator is manufactured and sold for use in general electric of AV, home appliance, OA, communication, measuring equipment etc.

So please contact us before using this product for the equipment which needs especially high reliability such as medical equipment, automobiles, trains, ship, disaster prevention and crime prevention equipment.

10.2 **⚠** Matters to be strictly observed

10.2.1 Fail-safe Design for Equipment

Be sure to provide appropriate fail-safe function on your equipment to prevent a second damage that may be caused by an abnormality or failure of the Ceramic Resonators.

10.2.2 Flow soldering shall not be applied to the Ceramic Resonators.

Soldering iron under 300C shall be placed 0.5mm off from product electrode within 3 seconds.

10.2.3 Rosin-based and non-activated flux shall be used. The content of halogen in the flux shall be 0.1wt% or less.

Water washable type flux shall not applied to the Ceramic Resonators.

10.2.4 "Ultrasonic Cleaning" and "Ultrasonic Welding" shall not be applied to the

Ceramic Resonators for preventing them from electrical failures and mechanical damages.

10.2.5 Be sure not to use the Ceramic Resonators beyond the specified "Operating Temperature Range" in the Specifications.

10.3 Application Notes

10.3.1 Abnormal/excess mechanical stresses such as falling shocks shall not be applied to the Ceramic Resonators in handling, to prevent them from being damaged or cracked. So, dropped devices shall not be used.

10.3.2 The Ceramic Resonators may be damaged by excess mechanical stress in automated assembly on PCB. So please practice an assembly test beforehand by this product and your machine. Automated assembly machine using mechanical chuck shall not be applied for this product and low speed assembly shall be recommended.

10.3.3 Soldering onto PCB and washing

1) Reflow Soldering Temperature and Time
Solder within the temperature and time condition illustrated by the hatched zone in the Fig.6.

2) Standard Reflow soldering condition

1. Pre-heating ; 175±5C ; 60 to 120 seconds
2. Keep-time 20sec.max. at 220C ; Peak temperature ; lower than 250C

Fig.6 Reflow Soldering Temperature and Time


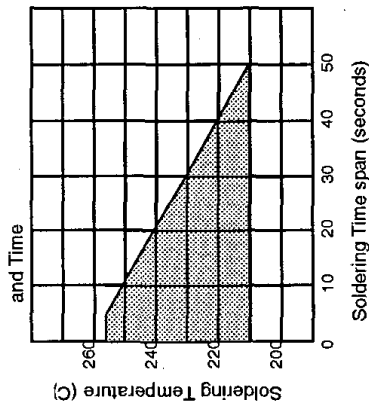


Fig.7 Standard Reflow soldering condition

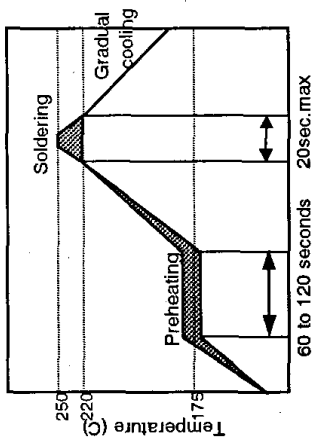

3) Manual soldering by soldering iron

Soldering iron under 300°C shall be placed 0.5mm off from product electrodes within 3seconds.

10.3.4 Irregular or stop of oscillation may occur depending on the circuit design (applied IC, stray capacitance and insulation resistance on PCB etc.) and/or environmental conditions. Please contact us beforehand.

10.3.5 It shall be noted that oscillating frequency of the Ceramic Resonator may drift depending on IC applied (the type names, the manufacturer) and the circuit design. Please contact us beforehand.

10.3.6 Avoid the usage and storages of this product under the following circumstance.

- * in erosive gas
- * at the place exposed to water
- * in high humidity
- * at the place exposed to sea [salt] breeze

10.3.7 When placing the resonator on a warp-prone section or near a splitting slot of a PC board place the resonator so that no stress will be applied to it in the event of warp of a PC board.

11. Notification matter

11.1 Applied law and restriction

- 1) This product has not been manufactured with any ozone-depleting chemical controlled under the Montreal Protocol.
- 2) This product complies with the RoHS Directive (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (DIRECTIVE 2002/95/EC)).
- 3) All the materials used in this part are registered materials under the Law Concerning the Examination and Regulation of Manufacture, etc. of Chemical Substances.