



Monolithic N-Channel JFET Duals

SST5198NL
SST5199NL

U5196NL
U5197NL

U5198NL
U5199NL

PRODUCT SUMMARY					
Part Number	V _{GS(off)} (V)	V _{(BR)GSS} Min (V)	g _{fs} Min (mS)	I _G Max (pA)	V _{GS1} - V _{GS2} Max (mV)
U5196NL	-0.7 to -4	-50	1	-15	5
U5197NL	-0.7 to -4	-50	1	-15	5
SST/U5198NL	-0.7 to -4	-50	1	-15	10
SST/U5199NL	-0.7 to -4	-50	1	-15	15

FEATURES

- Anti Latchup Capability
- Monolithic Design
- High Slew Rate
- Low Offset/Drift Voltage
- Low Gate Leakage: 5 pA
- Low Noise
- High CMRR: 100 dB

BENEFITS

- External Substrate Bias—Avoids Latchup
- Tight Differential Match vs. Current
- Improved Op Amp Speed, Settling Time Accuracy
- Minimum Input Error/Trimming Requirement
- Insignificant Signal Loss/Error Voltage
- High System Sensitivity
- Minimum Error with Large Input Signal

APPLICATIONS

- Wideband Differential Amps
- High-Speed, Temp-Compensated, Single-Ended Input Amps
- High Speed Comparators
- Impedance Converters


DESCRIPTION

The SST/U5196NL series of JFET duals are designed for high-performance differential amplification for a wide range of precision test instrumentation applications. This series features tightly matched specs, low gate leakage for accuracy, and wide dynamic range with I_G guaranteed at V_{DG} = 20 V.

Pins 4 and 8 of the SST series and pin 4 on the U series part numbers enable the substrate to be connected to a positive, external bias (V_{DD}) to avoid latchup.

The U series in the hermetically-sealed TO-78 package is available with full military processing. The SST series SO-8 package provides ease of manufacturing and the symmetrical pinout prevents improper orientation. The SO-8 package is available with tape-and-reel options for compatibility with automatic assembly methods.


For similar products see the low-noise SST/U401NL series and the low-leakage U421NL/423NL data sheets.

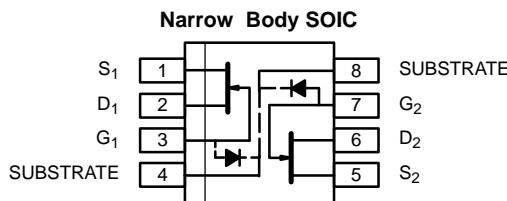

Top View

Marking Codes:

SST5198NL - 5198NL
SST5199NL - 5199NL

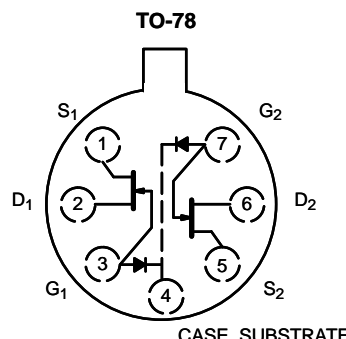

Top View

U5196NL, U5198NL
U5197NL, U5199NL

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage -50 V
 Gate Current 50 mA
 Lead Temperature (1/16" from case for 10 sec.) 300 °C
 Storage Temperature -65 to 200 °C
 Operating Junction Temperature -55 to 150 °C

Power Dissipation : Per Side^a 250 mW
 Total^b 500 mW

Notes

- a. Derate 2 mW/°C above 85 °C
- b. Derate 4 mW/°C above 85 °C



SPECIFICATIONS FOR U5196NL AND U5197NL (T _A = 25°C UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				U5196NL		U5197NL		
				Min	Max	Min	Max	
Static								
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-57	-50		-50		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V, I _D = 1 nA	-2	-0.7	-4	-0.7	-4	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	3	0.7	7	0.7	7	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -30 V, V _{DS} = 0 V	-10		-25		-25	pA
		T _A = 150°C	-20		-50		-50	nA
Gate Operating Current	I _G	V _{DG} = 20 V, I _D = 200 μA	-5		-15		-15	pA
		T _A = 125°C	-0.8		-15		-15	nA
Gate-Source Voltage	V _{GS}	V _{DG} = 20 V, I _D = 200 μA	-1.5	-0.2	-3.8	-0.2	-3.8	V
Dynamic								
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 kHz	3.0	1	4	1	4	mS
Common-Source Output Conductance	g _{os}		8		50		50	μS
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.8	0.7	1.6	0.7	1.6	mS
Common-Source Output Conductance	g _{os}		1		4		4	μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 MHz	3		6		6	pF
Common-Source Reverse Transfer Capacitance	C _{rss}		1		2		2	
Equivalent Input Noise Voltage	\bar{e}_n	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	11		20		20	nV/ √Hz
Noise Figure	NF	V _{DS} = 20 V, V _{GS} = 0 V f = 100 Hz, R _G = 10 MΩ			0.5		0.5	dB
Matching								
Differential Gate-Source Voltage	V _{GS1} - V _{GS2}	V _{DG} = 20 V, I _D = 200 μA			5		5	mV
Gate-Source Voltage Differential Change with Temperature	$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	V _{DG} = 20 V, I _D = 200 μA T _A = -55 to 125°C			5		10	μV/°C
Saturation Drain Current Ratio	$\frac{I_{DSS1}}{I_{DSS2}}$	V _{DS} = 20 V, V _{GS} = 0 V	0.98	0.95	1	0.95	1	
Transconductance Ratio	$\frac{g_{fs1}}{g_{fs2}}$	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.99	0.97	1	0.97	1	
Differential Output Conductance	g _{os1} - g _{os2}		0.1		1		1	μS
Differential Gate Current	I _{G1} - I _{G2}	V _{DG} = 20 V, I _D = 200 μA, T _A = 125°C	0.1		5		5	nA
Common Mode Rejection Ratio	CMRR	V _{DG} = 10 to 20 V, I _D = 200 μA	100					dB









SPECIFICATIONS FOR SST/U5198NL AND SST/U5199NL (T _A = 25 °C UNLESS OTHERWISE NOTED)									
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit	
				SST/U5198NL		SST/U5199NL			
				Min	Max	Min	Max		
Static									
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-57	-50		-50			V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V, I _D = 1 nA	-2	-0.7	-4	-0.7	-4		
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	3	0.7	7	0.7	7		mA
Gate Reverse Current	I _{GSS}	V _{GS} = -30 V, V _{DS} = 0 V	-10		-25		-25		pA
		T _A = 150 °C	-20		-50		-50		nA
Gate Operating Current	I _G	V _{DG} = 20 V, I _D = 200 μA	-5		-15		-15		pA
		T _A = 125 °C	-0.8		-15		-15		nA
Gate-Source Voltage	V _{GS}	V _{DG} = 20 V, I _D = 200 μA	-1.5	-0.2	-3.8	-0.2	-3.8		V
Dynamic									
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	3.0	1	4	1	4		mS
Common-Source Output Conductance	g _{os}		8		50		50		μS
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.8	0.7	1.6	0.7	1.6		mS
Common-Source Output Conductance	g _{os}		1		4		4		μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 MHz	3		6		6		pF
Common-Source Reverse Transfer Capacitance	C _{rss}		1		2		2		
Equivalent Input Noise Voltage	e _n	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	11						nV/ √Hz
Noise Figure	NF	V _{DS} = 20 V, V _{GS} = 0 V f = 100 Hz, R _G = 10 MΩ (U Only)	0.5						dB
Matching									
Differential Gate-Source Voltage	V _{GS1} - V _{GS2}	V _{DG} = 20 V, I _D = 200 μA			10		15		mV
Gate-Source Voltage Differential Change with Temperature	$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	V _{DG} = 20 V, I _D = 200 μA T _A = -55 to 125 °C	SST5198NL	15					μV/°C
			SST5199NL	30					
			U Only			20		40	
Saturation Drain Current Ratio	$\frac{I_{DSS1}}{I_{DSS2}}$	V _{DS} = 20 V, V _{GS} = 0 V	SST Only	0.97				μS	
			U Only		0.95	1	0.95		1
Transconductance Ratio	$\frac{g_{fs1}}{g_{fs2}}$	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	SST Only	0.97				μS	
			U Only		0.95	1	0.95		1
Differential Output Conductance	g _{os1} - g _{os2}	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	SST Only	0.2				μS	
			U Only			1			1
Differential Gate Current	I _{G1} - I _{G2}	V _{DG} = 20 V, I _D = 200 μA, T _A = 125 °C	SST Only	0.1				nA	
			U Only			5			5
Common Mode Rejection Ratio	CMRR	V _{DG} = 10 to 20 V, I _D = 200 μA	97						dB

Notes

- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.







NQP

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

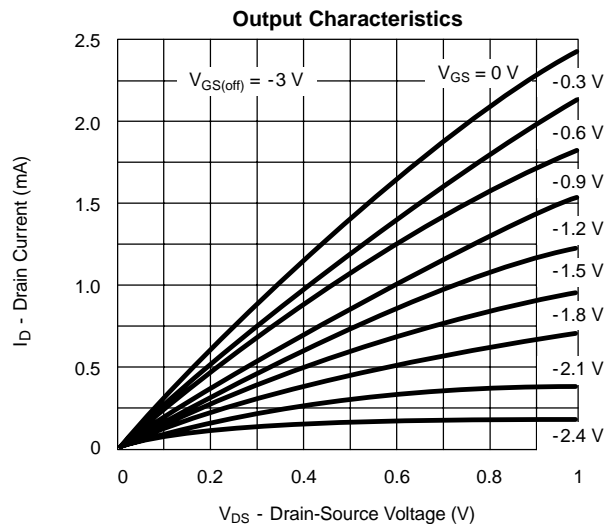
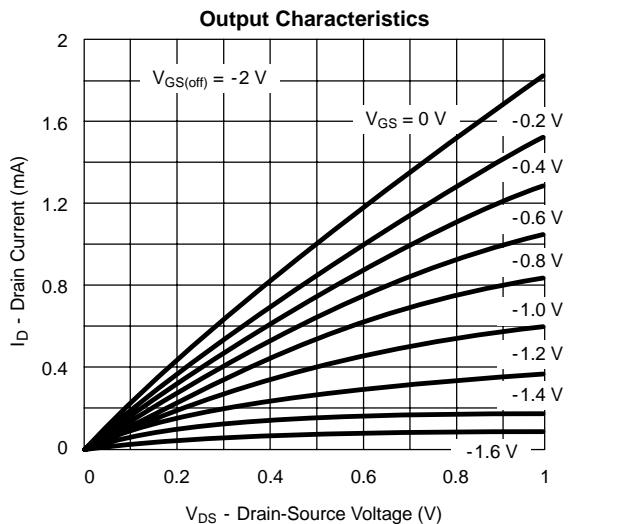
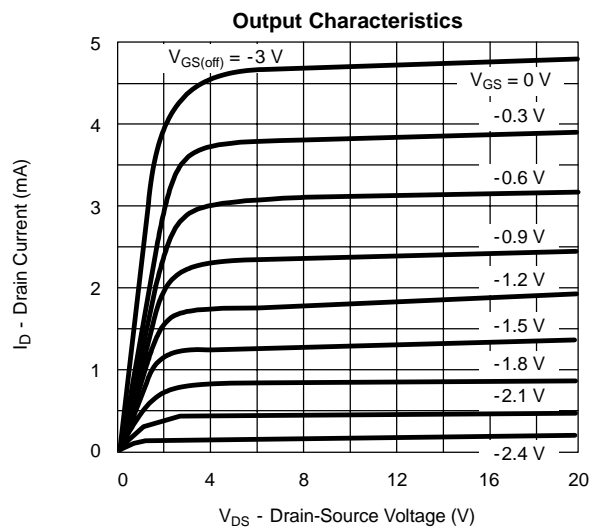
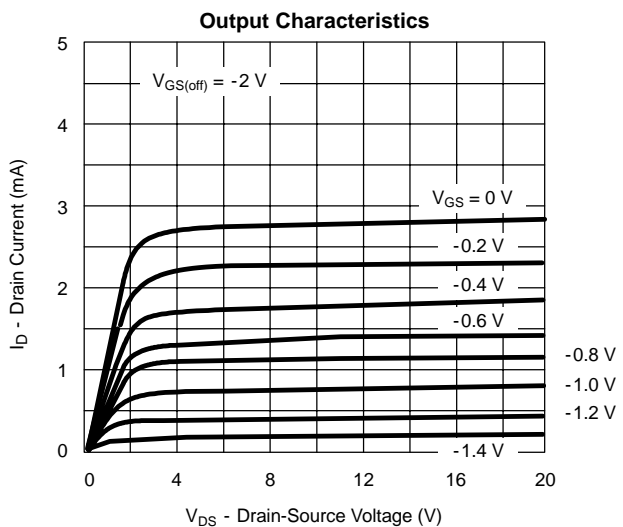
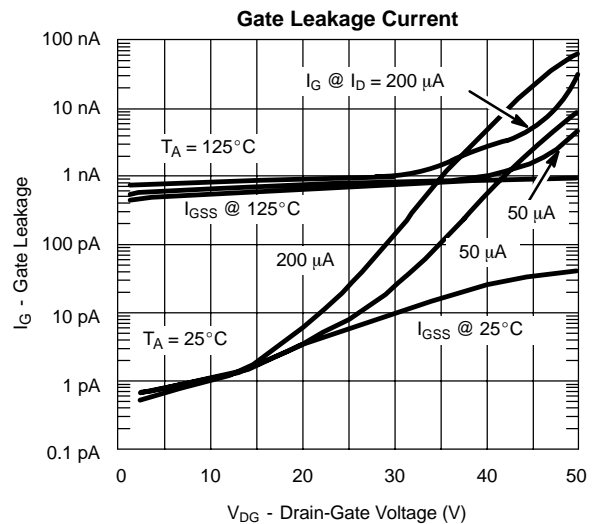
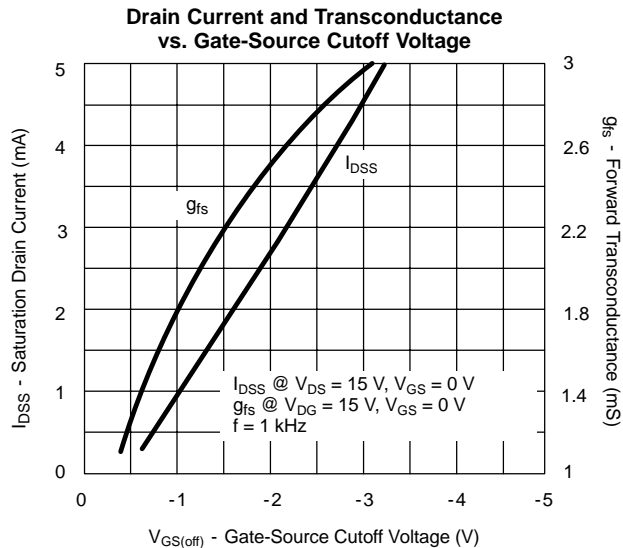




TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)

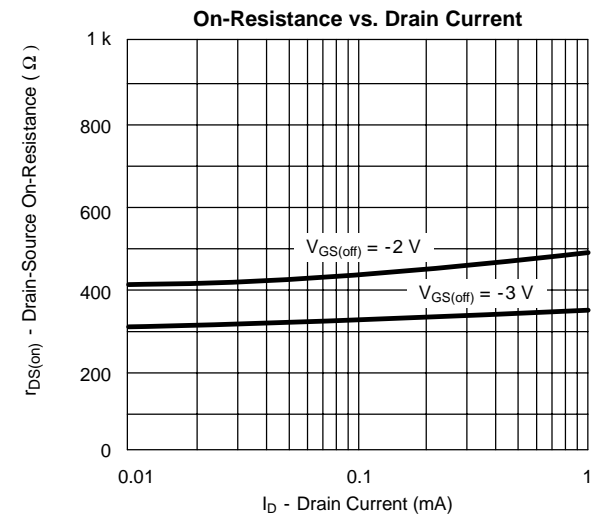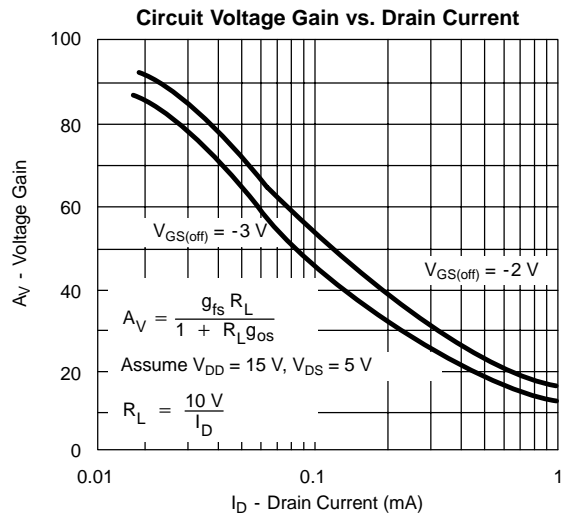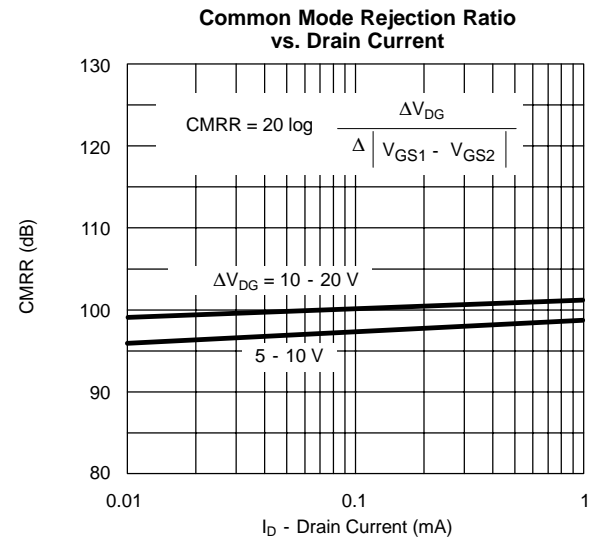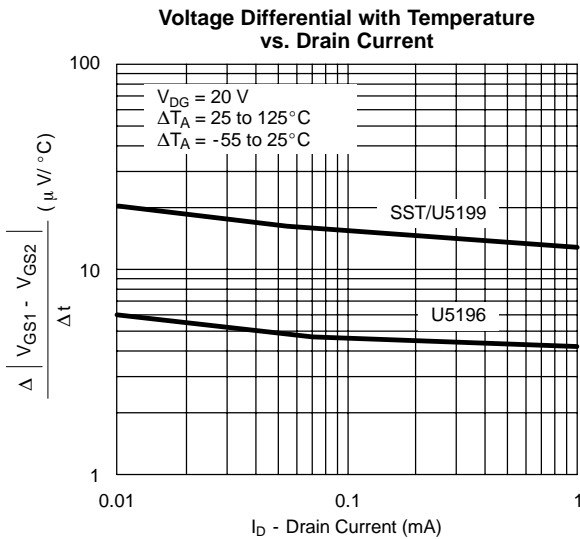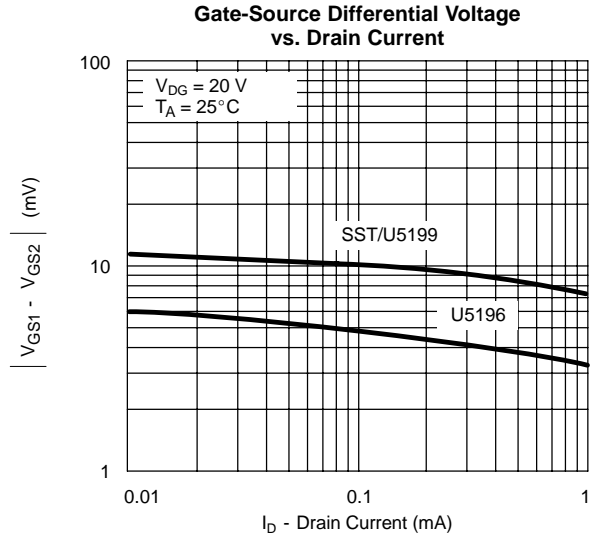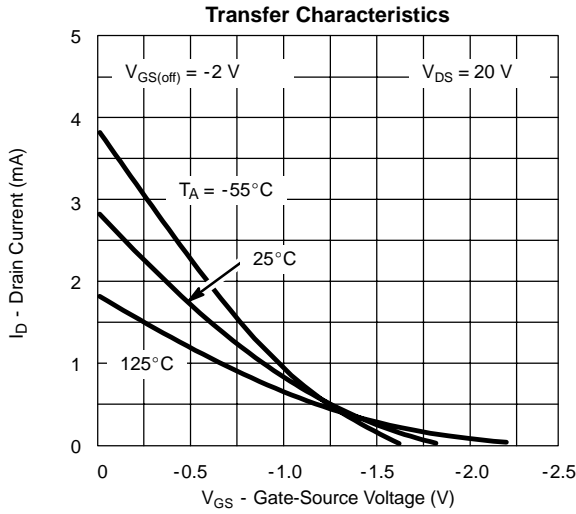

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

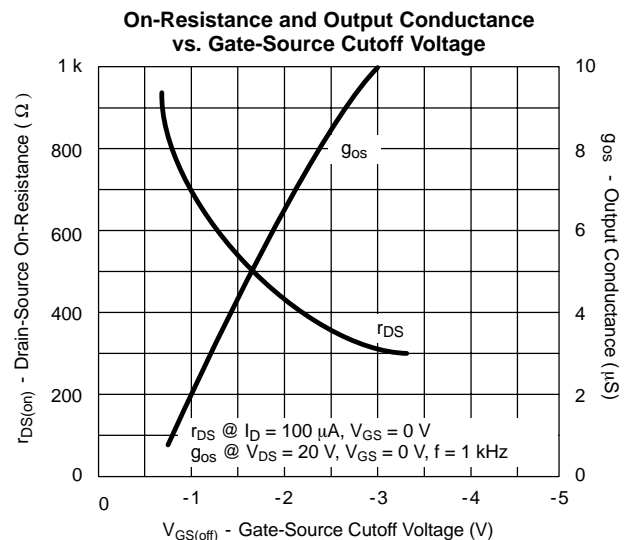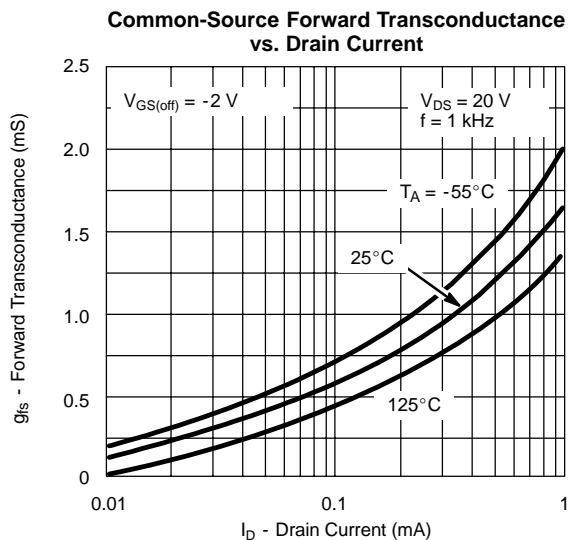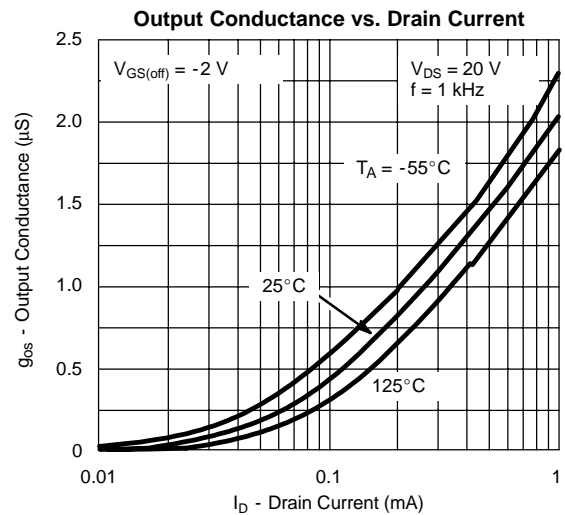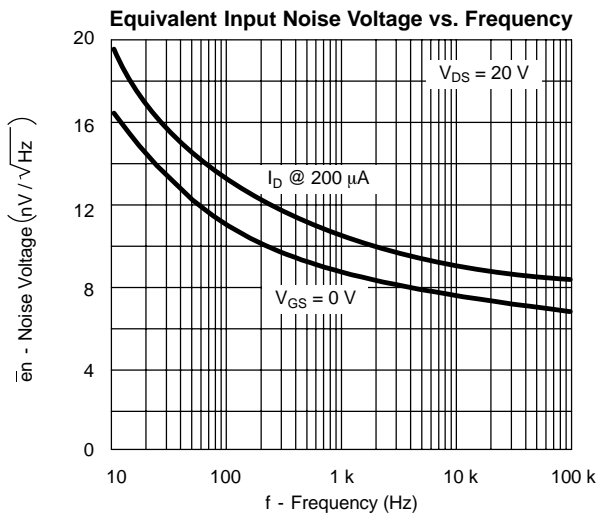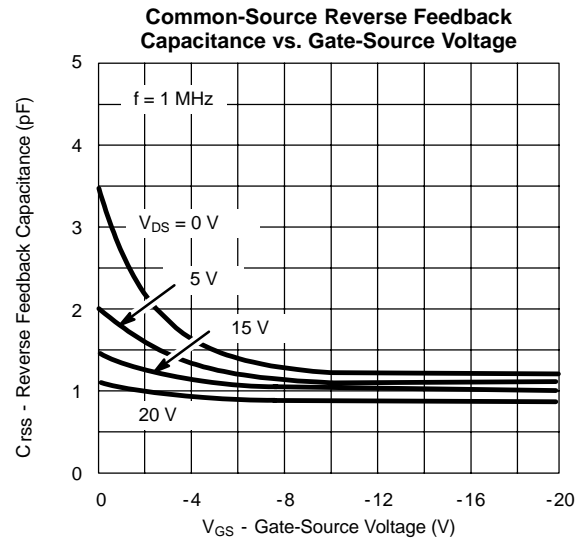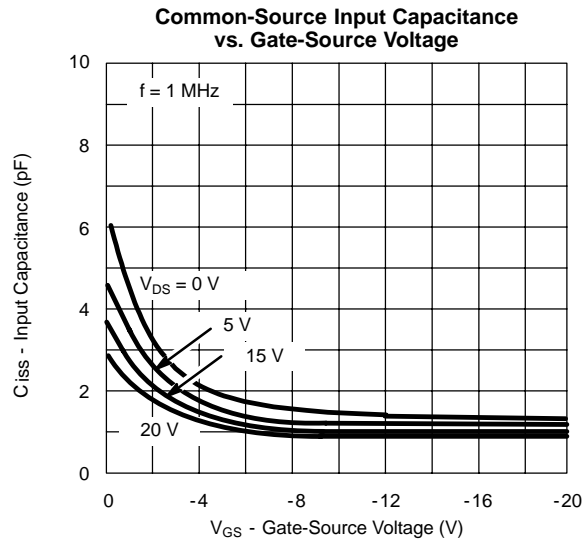



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.