

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3L-2303

CQ-X1612

CATALOG LISTING
V3L-2303
PAGE 1 OF 1

ISSUE
2

REVISIONS
A CO 80192
DCS 17 OCT 95

REPLACES X96891-V3L

RELEASE NO. PR-20345

CHECK

CHECK

22 OCT 92



DCS

CHECK

20 OCT 92

DCS

DDM/CAD
DRAWN

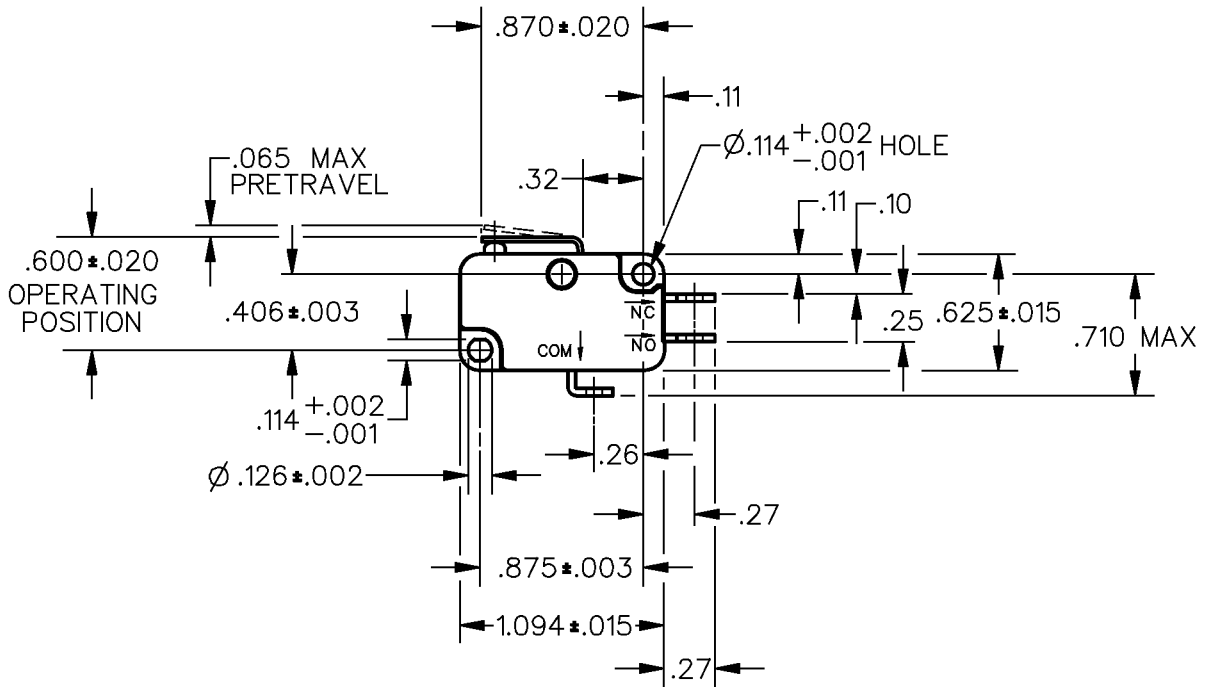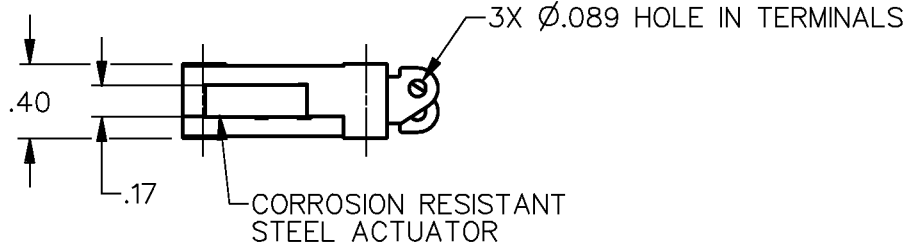


NOTE
1 - TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 55 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ±.030
RELEASE FORCE — — — 2 GRAMS MIN	L131		TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL — — — .015 MAX	10A 1/4HP 125 OR 250 VAC		THREE PLACE (.000) ±.005
OVERTRAVEL — — — .030 MIN	1/2A 125 VDC, 1/4A 250 VDC		ANGLES ±
RELEASE TRAVEL — — — .009 MIN	3A 125 VAC "L"		WEIGHT

