


CW-C6025

REV	DOCUMENT	CHANGED BY	CHECK
B	0041190	PK	11JUL08 ASD

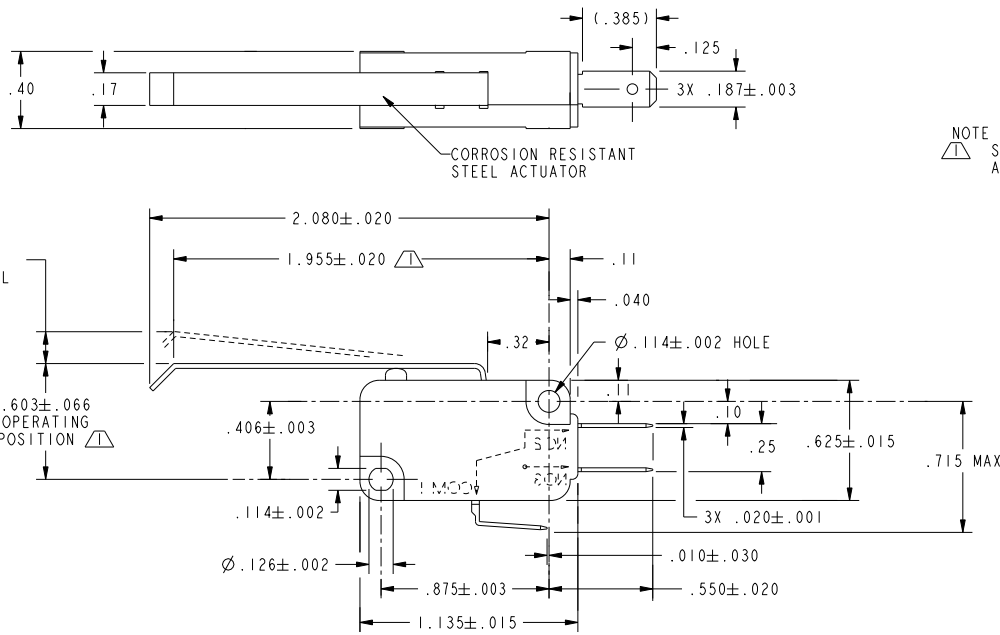

NOTE
 SWITCH CHARACTERISTICS TO BE MEASURED AT BEND IN LEVER

CHARACTERISTICS OPERATING FORCE ---- 146 GRAMS MAX RELEASE FORCE ---- 24 GRAMS MIN DIFFERENTIAL TRAVEL ---- .043 MAX OVERTRAVEL ---- .077 MIN RELEASE TRAVEL ---- .025 MIN		ELECTRICAL DATA CONTACT ARRANGEMENT S P D T L215 15, 1A 1/2HP 125, 250 OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "1"		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: <input checked="" type="checkbox"/> US (INCH) CUSTOMARY <input type="checkbox"/> SI (MM) METRIC NO PLACE X ±.040 ±1 ONE PLACE .X ±.030 ±0,4 TWO PLACE .XX ±.015 ±0,15 THREE PLACE .XXX ±.005 ± ANGLES ± ± RAW MATERIAL - COMMERCIAL STANDARD		DRAWN CSL 16 JUN 03 CHECK ASD 16 JUN 03 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED PTC 2D ASME Y14.5M-1994		Honeywell TITLE SWITCH, BASIC SIZE DWG TYPE DRAWING NAME REV B I V7-6C17D8-439 B	
THIRD ANGLE PROJECTION 				SCALE 2:1 WEIGHT SHEET 1 OF 1					