

Honeywell Sensing and Control

■ Order Product and **Get Support**

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request ■ Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

Home> Products > MICRO SWITCH™ Sealed and High Accuracy Switches > AT

66AT11-5N



AT Series Toggle Switch, 6 pole, 3 position, Solder T2 type terminal, Locking Lever

Login to iCOM Login as Rep/AD

Login as Guest Login to Digital

Search for product and

All Sensing and Contro

support information.

University

Keyword Search

Product Search

Part number search:

Use (*) to expand search

Specification Search

Actual product appearance may vary.

Features

Gold or silver contacts Choice of sealed bushing Standard or pull to unlock toggle lever Short behind-panel depth Solder or quick connect termination 2,4, 6, or 8 SPDT precision basic switches

2 or 3 position, momentary or maintained

Potential Applications

Industrial machinery and equipment Military and commercial aviation Construction equipment Test instruments Agricultural machinery Process control

Medical instrumentation

Description


Compact multipole 2, 4, 6,or 8 SPDT design. MICRO SWITCH™ precision basic switches conserve space and weight. Pull -to-Unlock Toggle Levers prevent accidental operation: the lever must be pulled approximately 2,3 mm [0.09 inches] to change the positions. Many locking configurations are available. Lever to bushing seals. Hermetic basic switches are available. AT qualified versions meet MILS-8805/98. Various levers and styles are available.

Supporting Documentation

Accessory: Seals

Accessory: Nuts

■ Panel Cutout
Engineering
Drawing

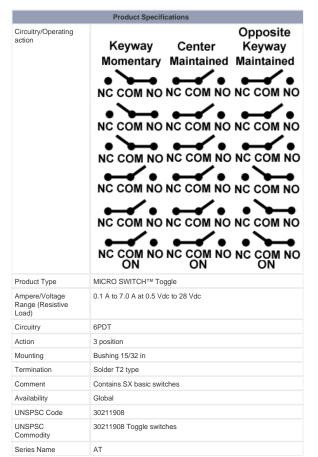

Terms & Conditions | Privacy Statement |