

# Honeywell Sensing and Control

■ Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

Home> Products > MICRO SWITCH™ Sealed and High Accuracy Switches > AT > Product Page

#### 62AT34-3



AT Series Toggle Switch, 2 pole, 2 position, H58 terminal, Standard Lever

Actual product appearance may vary.

### Features

Gold or silver contacts Choice of sealed bushing Standard or pull to unlock toggle lever Short behind-panel depth Solder or quick connect termination 2,4, 6, or 8 SPDT precision basic

2 or 3 position, momentary or maintained action

## Potential Applications

Industrial machinery and equipment Military and commercial aviation Construction equipment Test instruments Agricultural machinery Process control Medical instrumentation

#### Description

switches


Compact multipole 2, 4, 6,or 8 SPDT design. MICRO SWITCHTM precision basic switches conserve space and weight. Pull -to-Unlock Toggle Levers prevent accidental operation: the lever must be pulled approximately 2,3 mm [0.09 inches] to change the positions. Many locking configurations are available. Lever to bushing seals. Hermetic basic switches are available. AT qualified versions meet MILS-8805/98. Various levers and styles are available.

## Supporting Documentation

Accessory: Lever

Accessory: Seals Accessory: Nuts



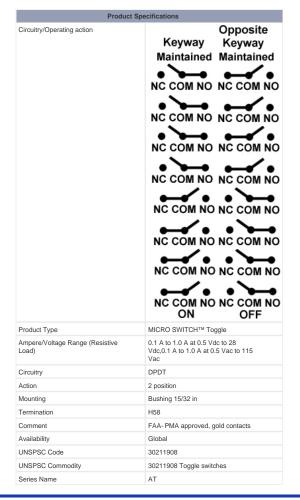

My Links Login to iCOM Login as Rep/AD Login as Guest Login to Digital University Keyword Search Search for product and support information. All Sensing and Contro Product Search Part number search: Use (\*) to expand search Specification Search