


Chip Monolithic Ceramic Capacitors

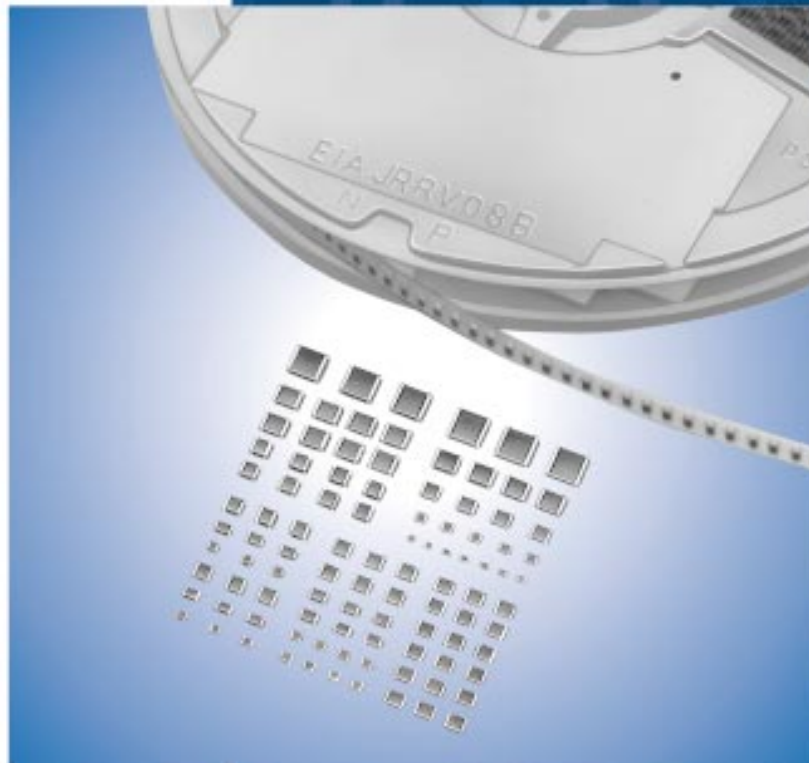

Cat.No.C02E-15

muRata *Innovator
in Electronics*
Murata
Manufacturing Co., Ltd.

CONTENTS

| | | |
|---|-------|-----|
| Part Numbering | _____ | 2 |
| Selection Guide | _____ | 7 |
| 1 for General Purpose GRM Series | _____ | 8 |
| 1 Specifications and Test Methods | _____ | 51 |
| ●GRM Series Data | _____ | 60 |
| 2 Capacitor Array GNM Series | _____ | 63 |
| 2 Specifications and Test Methods | _____ | 68 |
| 3 Low ESL LLL/LLA/LLM Series | _____ | 74 |
| 3 Specifications and Test Methods | _____ | 81 |
| 4 High-Q Type GJM Series | _____ | 85 |
| 4 Specifications and Test Methods | _____ | 95 |
| 5 High Frequency GQM Series | _____ | 98 |
| 5 Specifications and Test Methods | _____ | 105 |
| ●GQM Series Data | _____ | 108 |
| 6 High Frequency Type ERB Series | _____ | 109 |
| 6 Specifications and Test Methods | _____ | 116 |
| ●ERB Series Data | _____ | 119 |
| 7 Monolithic Microchip GMA Series | _____ | 121 |
| 7 Specifications and Test Methods | _____ | 123 |
| 8 for Bonding GMD Series | _____ | 127 |
| 8 Specifications and Test Methods | _____ | 132 |
| Package | _____ | 136 |
| ⚠Caution | _____ | 140 |
| Notice | _____ | 152 |
| Reference Data | _____ | 159 |
| 9 Medium Voltage Low Dissipation Factor | _____ | 166 |
| 10 Medium Voltage High Capacitance for General Use | _____ | 171 |
| 11 Only for LCD Backlight Inverter Circuit | _____ | 176 |
| 12 Only for Information Devices | _____ | 179 |

| | | |
|-----------|--|-----|
| 13 | Only for Camera Flash Circuit | 183 |
| 14 | AC250V (r.m.s.) Type (Which Meet Japanese Law) | 187 |
| 15 | Safety Standard Certified Type GC (UL, IEC60384-14 Class X1/Y2) | 191 |
| 16 | Safety Standard Certified Type GD (IEC60384-14 Class Y3) | 192 |
| 17 | Safety Standard Certified Type GF (IEC60384-14 Class Y2, X1/Y2) | 193 |
| 18 | Safety Standard Certified Type GB (IEC60384-14 Class X2) | 195 |
| | GA3 Series Specifications and Test Methods | 196 |
| | GRM/GR4/GR7/GA2/GA3 Series Data (Typical Example) | 200 |
| | Package | 203 |
| | ⚠Caution | 206 |
| | Notice | 214 |
| | ISO 9001 Certifications | 217 |

● Please refer to "Specifications and Test Methods" at the end of each chapter of **9** - **14** .

for EU RoHS Compliant

- All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2002/95/EC on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment".
- For more details, please refer to our website 'Murata's Approach for EU RoHS' (<http://www.murata.com/info/rohs.html>).

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

● Part Numbering

Chip Monolithic Ceramic Capacitors

(Part Number)

| | | | | | | | | | |
|----|---|----|---|----|----|-----|---|-----|---|
| GR | M | 18 | 8 | B1 | 1H | 102 | K | A01 | D |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

② Series

| Product ID | Code | Series |
|------------|----------|---|
| GR | M | Tin Plated Layer |
| | 4 | Only for Information Devices / Tip & Ring |
| | 7 | Only for Camera Flash Circuit |
| ER | B | High Frequency Type |
| GQ | M | High Frequency for Flow/Reflow Soldering |
| GM | A | Monolithic Microchip |
| | D | for Bonding |
| GN | M | Capacitor Array |
| LL | L | Low ESL Wide Width Type |
| | A | Eight-termination Low ESL Type |
| | M | Ten-termination Low ESL Type |
| GJ | M | High Frequency Low Loss Type |
| GA | 2 | for AC250V (r.m.s.) |
| | 3 | Safety Standard Certified Type |

③ Dimension (L×W)

| Code | Dimension (L×W) | EIA |
|-----------|-----------------|--------|
| 02 | 0.4×0.2mm | 01005 |
| 03 | 0.6×0.3mm | 0201 |
| 05 | 0.5×0.5mm | 0202 |
| 08 | 0.8×0.8mm | 0303 |
| 0D | 0.38×0.38mm | 015015 |
| 0M | 0.9×0.6mm | 0302 |
| 11 | 1.25×1.0mm | 0504 |
| 15 | 1.0×0.5mm | 0402 |
| 18 | 1.6×0.8mm | 0603 |
| 1M | 1.37×1.0mm | 0504 |
| 21 | 2.0×1.25mm | 0805 |
| 22 | 2.8×2.8mm | 1111 |
| 31 | 3.2×1.6mm | 1206 |
| 32 | 3.2×2.5mm | 1210 |
| 42 | 4.5×2.0mm | 1808 |
| 43 | 4.5×3.2mm | 1812 |
| 52 | 5.7×2.8mm | 2211 |
| 55 | 5.7×5.0mm | 2220 |

④ Dimension (T)

| Code | Dimension (T) |
|----------|----------------------------------|
| 2 | 0.2mm |
| 2 | 2-elements (Array Type) |
| 3 | 0.3mm |
| 4 | 4-elements (Array Type) |
| 5 | 0.5mm |
| 6 | 0.6mm |
| 7 | 0.7mm |
| 8 | 0.8mm |
| 9 | 0.85mm |
| A | 1.0mm |
| B | 1.25mm |
| C | 1.6mm |
| D | 2.0mm |
| E | 2.5mm |
| F | 3.2mm |
| M | 1.15mm |
| N | 1.35mm |
| Q | 1.5mm |
| R | 1.8mm |
| S | 2.8mm |
| X | Depends on individual standards. |

With the array type GNM series, "Dimension(T)" indicates the number of elements.

Continued on the following page.

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

Continued from the preceding page.

⑤ Temperature Characteristics

| Temperature Characteristic Codes | | | Temperature Characteristics | | | Operating Temperature Range |
|----------------------------------|-----------------|-----|-----------------------------|-------------------|---|-----------------------------|
| Code | Public STD Code | | Reference Temperature | Temperature Range | Capacitance Change or Temperature Coefficient | |
| 1X | SL *1 | JIS | 20°C | 20 to 85°C | +350 to -1000ppm/°C | -55 to 125°C |
| 2C | CH *1 | JIS | 20°C | 20 to 125°C | 0±60ppm/°C | -55 to 125°C |
| 2P | PH *1 | JIS | 20°C | 20 to 85°C | -150±60ppm/°C | -25 to 85°C |
| 2R | RH *1 | JIS | 20°C | 20 to 85°C | -220±60ppm/°C | -25 to 85°C |
| 2S | SH *1 | JIS | 20°C | 20 to 85°C | -330±60ppm/°C | -25 to 85°C |
| 2T | TH *1 | JIS | 20°C | 20 to 85°C | -470±60ppm/°C | -25 to 85°C |
| 3C | CJ *1 | JIS | 20°C | 20 to 125°C | 0±120ppm/°C | -55 to 125°C |
| 3P | PJ *1 | JIS | 20°C | 20 to 85°C | -150±120ppm/°C | -25 to 85°C |
| 3R | RJ *1 | JIS | 20°C | 20 to 85°C | -220±120ppm/°C | -25 to 85°C |
| 3S | SJ *1 | JIS | 20°C | 20 to 85°C | -330±120ppm/°C | -25 to 85°C |
| 3T | TJ *1 | JIS | 20°C | 20 to 85°C | -470±120ppm/°C | -25 to 85°C |
| 3U | UJ *1 | JIS | 20°C | 20 to 85°C | -750±120ppm/°C | -25 to 85°C |
| 4C | CK *1 | JIS | 20°C | 20 to 125°C | 0±250ppm/°C | -55 to 125°C |
| 5C | C0G *1 | EIA | 25°C | 25 to 125°C | 0±30ppm/°C | -55 to 125°C |
| 5G | X8G *1 | EIA | 25°C | 25 to 150°C | 0±30ppm/°C | -55 to 150°C |
| 6C | C0H *1 | EIA | 25°C | 25 to 125°C | 0±60ppm/°C | -55 to 125°C |
| 6P | P2H *1 | EIA | 25°C | 25 to 85°C | -150±60ppm/°C | -55 to 125°C |
| 6R | R2H *1 | EIA | 25°C | 25 to 85°C | -220±60ppm/°C | -55 to 125°C |
| 6S | S2H *1 | EIA | 25°C | 25 to 85°C | -330±60ppm/°C | -55 to 125°C |
| 6T | T2H *1 | EIA | 25°C | 25 to 85°C | -470±60ppm/°C | -55 to 125°C |
| 7U | U2J *1 | EIA | 25°C | 25 to 125°C *6 | -750±120ppm/°C | -55 to 125°C |
| B1 | B *2 | JIS | 20°C | -25 to 85°C | ±10% | -25 to 85°C |
| B3 | B | JIS | 20°C | -25 to 85°C | ±10% | -25 to 85°C |
| C7 | X7S | EIA | 25°C | -55 to 125°C | ±22% | -55 to 125°C |
| C8 | X6S | EIA | 25°C | -55 to 105°C | ±22% | -55 to 105°C |
| D7 | X7T | EIA | 25°C | -55 to 125°C | +22, -33% | -55 to 125°C |
| D8 | X6T | EIA | 25°C | -55 to 105°C | +22, -33% | -55 to 105°C |
| E7 | X7U | EIA | 25°C | -55 to 125°C | +22, -56% | -55 to 125°C |
| F1 | F *2 | JIS | 20°C | -25 to 85°C | +30, -80% | -25 to 85°C |
| F5 | Y5V | EIA | 25°C | -30 to 85°C | +22, -82% | -30 to 85°C |
| L8 | X8L | *3 | 25°C | -55 to 150°C | +15, -40% | -55 to 150°C |
| R1 | R *2 | JIS | 20°C | -55 to 125°C | ±15% | -55 to 125°C |
| R3 | R | JIS | 20°C | -55 to 125°C | ±15% | -55 to 125°C |
| R6 | X5R | EIA | 25°C | -55 to 85°C | ±15% | -55 to 85°C |
| R7 | X7R | EIA | 25°C | -55 to 125°C | ±15% | -55 to 125°C |
| R9 | X8R | EIA | 25°C | -55 to 150°C | ±15% | -55 to 150°C |
| W0 | - | - | 25°C | -55 to 125°C | ±10% *4 | -55 to 125°C |
| | | | | | +22, -33% *5 | |

*1 Please refer to table for Capacitance Change under reference temperature.


*2 Capacitance change is specified with 50% rated voltage applied.

*3 Murata Temperature Characteristic Code.

*4 Apply DC350V bias.

*5 No DC bias.

*6 Rated Voltage 100Vdc max : 25 to 85°C

Continued on the following page. 

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

☐ Continued from the preceding page.

●Capacitance Change from each temperature

JIS Code

| Murata Code | Capacitance Change from 20°C (%) | | | | | |
|-------------|----------------------------------|-------|-------|-------|-------|-------|
| | -55°C | | -25°C | | -10°C | |
| | Max. | Min. | Max. | Min. | Max. | Min. |
| 1X | - | - | - | - | - | - |
| 2C | 0.82 | -0.45 | 0.49 | -0.27 | 0.33 | -0.18 |
| 2P | - | - | 1.32 | 0.41 | 0.88 | 0.27 |
| 2R | - | - | 1.70 | 0.72 | 1.13 | 0.48 |
| 2S | - | - | 2.30 | 1.22 | 1.54 | 0.81 |
| 2T | - | - | 3.07 | 1.85 | 2.05 | 1.23 |
| 3C | 1.37 | -0.90 | 0.82 | -0.54 | 0.55 | -0.36 |
| 3P | - | - | 1.65 | 0.14 | 1.10 | 0.09 |
| 3R | - | - | 2.03 | 0.45 | 1.35 | 0.30 |
| 3S | - | - | 2.63 | 0.95 | 1.76 | 0.63 |
| 3T | - | - | 3.40 | 1.58 | 2.27 | 1.05 |
| 3U | - | - | 4.94 | 2.84 | 3.29 | 1.89 |
| 4C | 2.56 | -1.88 | 1.54 | -1.13 | 1.02 | -0.75 |

EIA Code

| Murata Code | Capacitance Change from 25°C (%) | | | | | |
|--------------|----------------------------------|-------|-------|-------|-------|-------|
| | -55°C | | -30°C | | -10°C | |
| | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C/5G | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |
| 6C | 0.87 | -0.48 | 0.59 | -0.33 | 0.38 | -0.21 |
| 6P | 2.33 | 0.72 | 1.61 | 0.50 | 1.02 | 0.32 |
| 6R | 3.02 | 1.28 | 2.08 | 0.88 | 1.32 | 0.56 |
| 6S | 4.09 | 2.16 | 2.81 | 1.49 | 1.79 | 0.95 |
| 6T | 5.46 | 3.28 | 3.75 | 2.26 | 2.39 | 1.44 |
| 7U | 8.78 | 5.04 | 6.04 | 3.47 | 3.84 | 2.21 |

Continued on the following page. ☐

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

Continued from the preceding page.

⑥ Rated Voltage


| Code | Rated Voltage |
|------|---|
| 0E | DC2.5V |
| 0G | DC4V |
| 0J | DC6.3V |
| 1A | DC10V |
| 1C | DC16V |
| 1E | DC25V |
| YA | DC35V |
| 1H | DC50V |
| 2A | DC100V |
| 2D | DC200V |
| 2E | DC250V |
| YD | DC300V |
| 2H | DC500V |
| 2J | DC630V |
| 3A | DC1kV |
| 3D | DC2kV |
| 3F | DC3.15kV |
| BB | DC350V (for Camera Flash Circuit) |
| E2 | AC250V |
| GB | X2; AC250V (Safety Standard Certified Type GB) |
| GC | X1/Y2; AC250V (Safety Standard Certified Type GC) |
| GD | Y3; AC250V (Safety Standard Certified Type GD) |
| GF | Y2, X1/Y2; AC250V (Safety Standard Certified Type GF) |

⑦ Capacitance

Expressed by three-digit alphanumerics. The unit is pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two numbers. If there is a decimal point, it is expressed by the capital letter "R". In this case, all figures are significant digits.

Ex.)

| Code | Capacitance |
|------|-------------|
| R50 | 0.5pF |
| 1R0 | 1.0pF |
| 100 | 10pF |
| 103 | 10000pF |

Continued on the following page. 

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

Continued from the preceding page.

⑨ Capacitance Tolerance

| Code | Capacitance Tolerance | TC | Series | Capacitance Step | |
|----------|-----------------------|----------------------------------|--------------------|------------------|-------------------------|
| W | ±0.05pF | CΔ | GRM/GJM | ≤9.9pF | 0.1pF |
| B | ±0.1pF | CΔ | GRM/GJM | ≤9.9pF | 0.1pF |
| | | | GQM | ≤1pF | 0.1pF |
| | | | | 1.1 to 9.9pF | 1pF Step and E24 Series |
| | | | ERB | ≤9.9pF | 1pF Step and E24 Series |
| C | ±0.25pF | CΔ | GRM/GJM | ≤9.9pF | 0.1pF |
| | | except CΔ | GRM | ≤5pF | * 1pF |
| | | CΔ | ERB | ≤9.9pF | 1pF Step and E24 Series |
| | | | GQM | ≤1pF | 0.1pF |
| | | | | 1.1 to 9.9pF | 1pF Step and E24 Series |
| D | ±0.5pF | CΔ | GRM/GJM | 5.1 to 9.9pF | 0.1pF |
| | | except CΔ | GRM | 5.1 to 9.9pF | * 1pF |
| | | CΔ | ERB/GQM | 5.1 to 9.9pF | 1pF Step and E24 Series |
| G | ±2% | CΔ | GJM | ≥10pF | E12 Series |
| | | CΔ | GQM/ERB | ≥10pF | E24 Series |
| J | ±5% | CΔ-SL | GRM/GA3 | ≥10pF | E12 Series |
| | | CΔ | ERB/GQM/GJM | ≥10pF | E24 Series |
| K | ±10% | B, R, X7R, X5R, ZLM | GRM/GR7/GA3 | E6 Series | |
| | | C0G | GNM | E6 Series | |
| | | B, R, X7R, X5R, ZLM | GR4, GMD | E12 Series | |
| M | ±20% | B, R, X7R, X7S | GRM/GMA | E6 Series | |
| | | X5R, X7R, X7S | GNM | E3 Series | |
| | | X7R | GA2 | E3 Series | |
| | | X5R, X7R, X7S, X6S | LLL/LLA/LLM | E3 Series | |
| | | | | GRM | E3 Series |
| Z | +80%, -20% | F, Y5V | | | |
| R | | Depends on individual standards. | | | |

* E24 series is also available.

⑩ Individual Specification Code


Expressed by three figures.

⑪ Packaging

| Code | Packaging |
|----------|-----------------------------|
| L | ø180mm Embossed Taping |
| D | ø180mm Paper Taping |
| E | ø180mm Paper Taping (LLL15) |
| K | ø330mm Embossed Taping |
| J | ø330mm Paper Taping |
| F | ø330mm Paper Taping (LLL15) |
| B | Bulk |
| C | Bulk Case |
| T | Bulk Tray |

Please check MURATA home page (<http://www.murata.com/index.html>) in case you can not find the part number on the catalog.

Selection Guide of Chip Monolithic Ceramic Capacitors

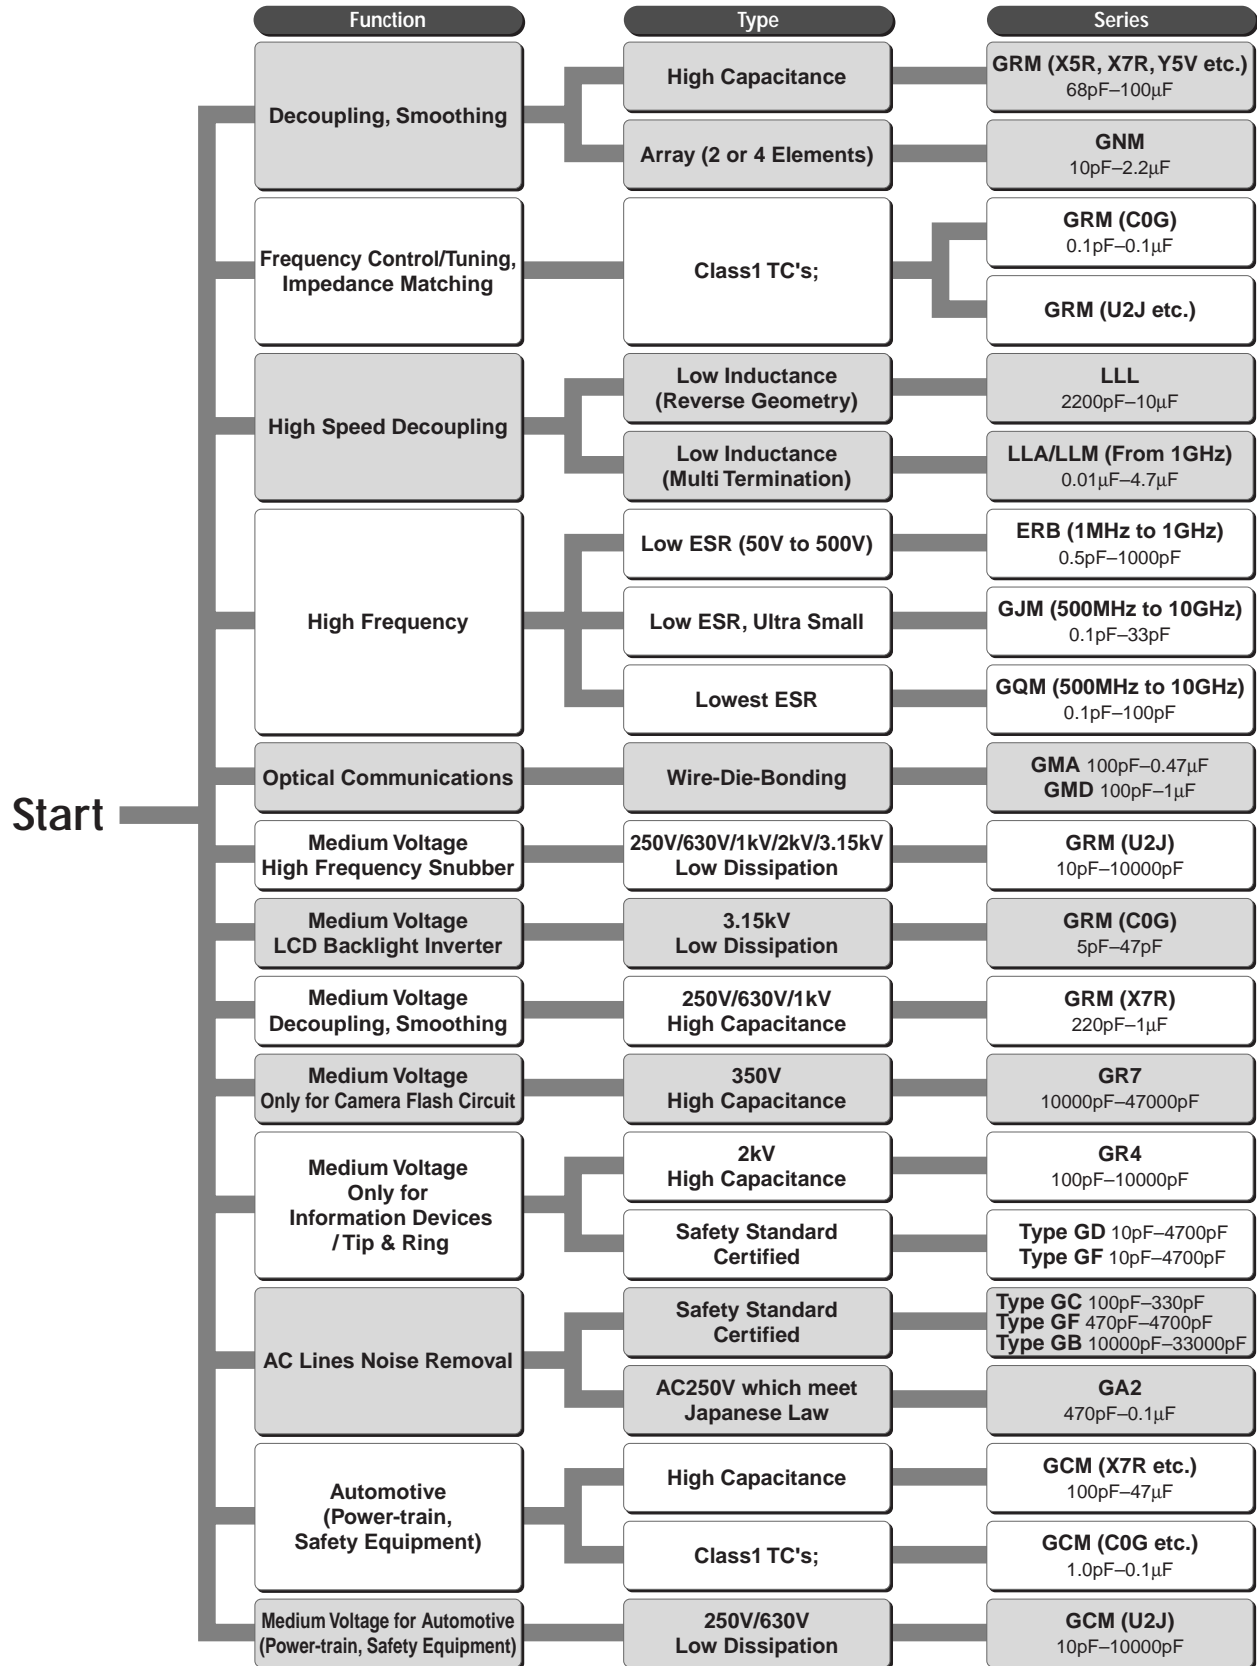

Chip Monolithic Ceramic Capacitors



for General Purpose GRM Series


■ Features

1. Higher resistance of solder-leaching due to the Ni-barriered termination, applicable for reflow-soldering, and flow-soldering (GRM18/21/31 type only).
2. The GRM series is lead free product.
3. Smaller size and higher capacitance value.
4. High reliability and no polarity.
5. Excellent pulse responsibility and noise reduction due to the low impedance at high frequency.
6. The GRM series is available in paper or embossed tape and reel packaging for automatic placement. Bulk case packaging is also available for GRM15/18/21(T=0.6,1.25).
7. Ta replacement.

■ Applications

General electronic equipment

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|-----------|------------------|--------------|--------|
| | L | W | T | e | g min. |
| GRM022 | 0.4 ±0.02 | 0.2 ±0.02 | 0.2 ±0.02 | 0.07 to 0.14 | 0.13 |
| GRM033 | 0.6 ±0.03 | 0.3 ±0.03 | 0.3 ±0.03 | 0.1 to 0.2 | 0.2 |
| GRM15X | | | 0.25 ±0.05 | | |
| GRM153 | 1.0 ±0.05 | 0.5 ±0.05 | 0.3 ±0.03 | 0.1 to 0.3 | 0.4 |
| GRM155 | | | 0.5 ±0.05 | 0.15 to 0.35 | 0.3 |
| GRM185 | | | 0.5 +0/-0.1 | | |
| GRM188* | 1.6 ±0.1 | 0.8 ±0.1 | 0.8 ±0.1 | 0.2 to 0.5 | 0.5 |
| GRM216 | | | 0.6 ±0.1 | | |
| GRM219 | | | 0.85 ±0.1 | | |
| GRM21A | 2.0 ±0.1 | 1.25 ±0.1 | 1.0 +0/-0.2 | 0.2 to 0.7 | 0.7 |
| GRM21B | | | 1.25 ±0.1 | | |
| GRM316 | | | 0.6 ±0.1 | | |
| GRM319 | 3.2 ±0.15 | 1.6 ±0.15 | 0.85 ±0.1 | 0.3 to 0.8 | 1.5 |
| GRM31M | | | 1.15 ±0.1 | | |
| GRM31C | 3.2 ±0.2 | 1.6 ±0.2 | 1.6 ±0.2 | | |
| GRM329 | | | 0.85 +0.15/-0.05 | | |
| GRM32A | | | 1.0 +0/-0.2 | | |
| GRM32M | | | 1.15 ±0.1 | | |
| GRM32N | | | 1.35 ±0.15 | | |
| GRM32C | 3.2 ±0.3 | 2.5 ±0.2 | 1.6 ±0.2 | 0.3 min. | 1.0 |
| GRM32R | | | 1.8 ±0.2 | | |
| GRM32D | | | 2.0 ±0.2 | | |
| GRM32E | | | 2.5 ±0.2 | | |



* Bulk Case: 1.6 ±0.07(L) × 0.8 ±0.07(W) × 0.8 ±0.07(T)
 * The figure indicates typical Specification.

Capacitance Table

1

Temperature Compensating Type C0G(5C),U2J(7U) Characteristics

| 6 | | ex.6: T Dimension [mm] | | | | | | | | | | | | | | | | | | | |
|-------------|----|------------------------|----------------------|---------|----------|---------------------------------|---------|---------------------|---------|----------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|----------------------|---------|---------------------|
| Capacitance | TC | LxW [mm] | C0G(5C) | | | | | | | | | | U2J(7U) | | | | | | | | |
| | | | 0.4x0.2 (02) <01005> | | | 1.0x0.5 (03) (15) <0201> <0402> | | 1.6x0.8 (18) <0603> | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | | 0.6x0.3 (03) <0201> | | 1.0x0.5 (15) <0402> | | 1.6x0.8 (18) <0603> | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> |
| | | | 16 (1C) | 10 (1A) | 6.3 (0J) | 50 (1H) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 50 (1H) | 25 (1E) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) |
| 0.1pF(R10) | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.2pF(R20) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.3pF(R30) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.4pF(R40) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.5pF(R50) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.6pF(R60) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.7pF(R70) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.8pF(R80) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 0.9pF(R90) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.0pF(1R0) | 2 | | | 3 | 3, 5 | | | | | | | | 3 | | 5 | | | | | | |
| 1.1pF(1R1) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.2pF(1R2) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.3pF(1R3) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.4pF(1R4) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.5pF(1R5) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.6pF(1R6) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.7pF(1R7) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.8pF(1R8) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 1.9pF(1R9) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.0pF(2R0) | 2 | | | 3 | 3, 5 | | | | | | | | 3 | | 5 | | | | | | |
| 2.1pF(2R1) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.2pF(2R2) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.3pF(2R3) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.4pF(2R4) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.5pF(2R5) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.6pF(2R6) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.7pF(2R7) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.8pF(2R8) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 2.9pF(2R9) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.0pF(3R0) | 2 | | | 3 | 3, 5 | | | | | | | | 3 | | 5 | | | | | | |
| 3.1pF(3R1) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.2pF(3R2) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.3pF(3R3) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.4pF(3R4) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.5pF(3R5) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.6pF(3R6) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.7pF(3R7) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.8pF(3R8) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 3.9pF(3R9) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.0pF(4R0) | 2 | | | 3 | 3, 5 | | | | | | | | 3 | | 5 | | | | | | |
| 4.1pF(4R1) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.2pF(4R2) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.3pF(4R3) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.4pF(4R4) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.5pF(4R5) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.6pF(4R6) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.7pF(4R7) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.8pF(4R8) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |
| 4.9pF(4R9) | 2 | | | 3 | 3, 5 | | | | | | | | | | | | | | | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page.



1

Capacitance Table

Continued from the preceding page.

| 6 | | ex.6: T Dimension [mm] | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---------------------|------------------------|----------|----------------------|---------|----------|---------------------------------|---------|---------------------|---------|----------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|----------------------|---------|---------------------|--|
| Capacitance | Rated Voltage [Vdc] | TC | LxW [mm] | C0G(5C) | | | | | | | | | | U2J(7U) | | | | | | | | | | |
| | | | | 0.4x0.2 (02) <01005> | | | 0.6x0.3 (03) (15) <0201> <0402> | | 1.6x0.8 (18) <0603> | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | | 0.6x0.3 (03) <0201> | | 1.0x0.5 (15) <0402> | | 1.6x0.8 (18) <0603> | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | |
| | | | | 16 (1C) | 10 (1A) | 6.3 (0J) | 50 (1H) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 50 (1H) | 25 (1E) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) | 50 (1H) | |
| 5.0pF(5R0) | 2 | | | | 3 | 3, 5 | | | | | | | 3 | | 5 | | | | | | | | | |
| 5.1pF(5R1) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.2pF(5R2) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.3pF(5R3) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.4pF(5R4) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.5pF(5R5) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.6pF(5R6) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.7pF(5R7) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.8pF(5R8) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 5.9pF(5R9) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.0pF(6R0) | 2 | | | | 3 | 3, 5 | | | | | | | 3 | | 5 | | | | | | | | | |
| 6.1pF(6R1) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.2pF(6R2) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.3pF(6R3) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.4pF(6R4) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.5pF(6R5) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.6pF(6R6) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.7pF(6R7) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.8pF(6R8) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 6.9pF(6R9) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.0pF(7R0) | 2 | | | | 3 | 3, 5 | | | | | | | 3 | | 5 | | | | | | | | | |
| 7.1pF(7R1) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.2pF(7R2) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.3pF(7R3) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.4pF(7R4) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.5pF(7R5) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.6pF(7R6) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.7pF(7R7) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.8pF(7R8) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 7.9pF(7R9) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.0pF(8R0) | 2 | | | | 3 | 3, 5 | | | | | | | 3 | | 5 | | | | | | | | | |
| 8.1pF(8R1) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.2pF(8R2) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.3pF(8R3) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.4pF(8R4) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.5pF(8R5) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.6pF(8R6) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.7pF(8R7) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.8pF(8R8) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 8.9pF(8R9) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.0pF(9R0) | 2 | | | | 3 | 3, 5 | | | | | | | 3 | | 5 | | | | | | | | | |
| 9.1pF(9R1) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.2pF(9R2) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.3pF(9R3) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.4pF(9R4) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.5pF(9R5) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.6pF(9R6) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.7pF(9R7) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.8pF(9R8) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |
| 9.9pF(9R9) | 2 | | | | 3 | 3, 5 | | | | | | | | | | | | | | | | | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page. ↗

Capacitance Table

Continued from the preceding page.

6 ex.6: T Dimension [mm]

| Capacitance | Rated Voltage [Vdc] | TC | C0G(5C) | | | | | | | | | | U2J(7U) | | | | | | | | | | | | |
|--------------|---------------------|----|----------------------|---------|----------|---------------------|---------|---------------------|---------|---------------------|---------|----------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|----------------------|---------|---------------------|--|
| | | | 0.4x0.2 (02) <01005> | | | 0.6x0.3 (03) <0201> | | 1.0x0.5 (15) <0402> | | 1.6x0.8 (18) <0603> | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | | 0.6x0.3 (03) <0201> | | 1.0x0.5 (15) <0402> | | 1.6x0.8 (18) <0603> | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | |
| | | | 16 (1C) | 10 (1A) | 6.3 (0J) | 50 (1H) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 100 (1E) | 50 (1H) | 50 (1H) | 25 (1E) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) | 50 (1H) | 10 (1A) | 50 (1H) | 50 (1H) | | |
| 10pF(100) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | 3 | | 5 | | | | | | | | | |
| 12pF(120) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | 3 | | 5 | | | | | | | | | |
| 15pF(150) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | 3 | | 5 | | | | | | | | | |
| 18pF(180) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 22pF(220) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 27pF(270) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 33pF(330) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 39pF(390) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 47pF(470) | 2 | | | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 56pF(560) | | 2 | 2 | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 68pF(680) | | 2 | 2 | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 82pF(820) | | 2 | 2 | 3 | 3,5 | 8 | 8 | | | | | | | | 3 | 5 | | | | | | | | | |
| 100pF(101) | | 2 | 2 | 3 | 3,5 | 8 | 8 | 6 | | | | | | | 3 | 5 | | | | | | | | | |
| 120pF(121) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | 5 | | | | | | | | | |
| 150pF(151) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | 5 | | | | | | | | | |
| 180pF(181) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | 5 | | | | | | | | | |
| 220pF(221) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 270pF(271) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 330pF(331) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 390pF(391) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 470pF(471) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 560pF(561) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 680pF(681) | | | | | 3,5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 820pF(821) | | | | | 5 | 8 | 8 | 6 | | | | | | | | | | | | | | | | | |
| 1000pF(102) | | | | | 5 | 8 | 8 | 6 | | | | | | | | | | | | | | 8 | | | |
| 1200pF(122) | | | | | | 8 | 8 | 6 | 6 | | | | | | | | 5 | 8 | | | | | | | |
| 1500pF(152) | | | | | | 8 | 8 | 6 | 6 | | | | | | | | 5 | 8 | | | | | | | |
| 1800pF(182) | | | | | | | 8 | 6 | 6 | 9 | | | | | | | 5 | 8 | | | | | | | |
| 2200pF(222) | | | | | | | 8 | 6 | 6 | 9 | | | | | | | 5 | 5,8 | | | | | | | |
| 2700pF(272) | | | | | | | 8 | 6 | 6 | 9 | | | | | | | 5 | 5,8 | | | | | | | |
| 3300pF(332) | | | | | | | 8 | 6 | 6 | 9 | | | | | | | 5 | 5,8 | | | | | | | |
| 3900pF(392) | | | | | | | 8 | | 6 | 9 | | | | | | | 5 | 5,8 | | | | | | | |
| 4700pF(472) | | | | | | | | | 6 | 9 | 9 | | | | | | 5 | 5,8 | | | | | | | |
| 5600pF(562) | | | | | | | | | 9 | 9 | 9 | | | | | | | 8 | 5 | | | | | | |
| 6800pF(682) | | | | | | | | | 9 | 9 | 9 | | | | | | | 8 | 5 | | | | | | |
| 8200pF(822) | | | | | | | | | 9 | 9 | 9 | | | | | | | 8 | 5 | | | | | | |
| 10000pF(103) | | | | | | | | | 9 | 9 | 9 | | | | | | | 8 | 5 | 6 | | | | | |
| 12000pF(123) | | | | | | | | | 9 | | 9 | | | | | | | | 8 | 6 | | | | | |
| 15000pF(153) | | | | | | | | | 9 | | 9 | | | | | | | | 8 | 6 | | | | | |
| 18000pF(183) | | | | | | | | | B | | 9 | | | | | | | | 8 | 6 | | | | | |
| 22000pF(223) | | | | | | | | | B | | 9 | | | | | | | | 8 | 9 | | | | | |
| 27000pF(273) | | | | | | | | | | | 9 | | | | | | | | | 9 | | | | | |
| 33000pF(333) | | | | | | | | | | | 9 | | | | | | | | | A | | | | | |
| 39000pF(393) | | | | | | | | | | | 9 | | | | | | | | | B | | | | | |
| 47000pF(473) | | | | | | | | | | | M | | | | | | | | | B | | | | | |
| 56000pF(563) | | | | | | | | | | | M | | | | | | | | | | | 9 | 9 | | |
| 68000pF(683) | | | | | | | | | | | C | | | | | | | | | | | B | M | | |
| 82000pF(823) | | | | | | | | | | | C | | | | | | | | | | | B | M | | |
| 0.1μF(104) | | | | | | | | | | | C | | | | | | | | | | | B | M | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page. ↗

Capacitance Table

Continued from the preceding page.

Temperature Compensating Type P2H(6P),R2H(6R),S2H(6S),T2H(6T) Characteristics

| 6 | | ex.6: T Dimension [mm] | | | | | | | |
|-------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Capacitance | TC | P2H (6P) | | R2H (6R) | | S2H (6S) | | T2H (6T) | |
| | | LxW [mm] | Rated Voltage [Vdc] | LxW [mm] | Rated Voltage [Vdc] | LxW [mm] | Rated Voltage [Vdc] | LxW [mm] | Rated Voltage [Vdc] |
| 1.0pF(1R0) | 1.0x0.5 (15) <0402> | 0.6x0.3 (03) <0201> | 1.0x0.5 (15) <0402> | 0.6x0.3 (03) <0201> | 1.0x0.5 (15) <0402> | 0.6x0.3 (03) <0201> | 1.0x0.5 (15) <0402> | 0.6x0.3 (03) <0201> | 1.0x0.5 (15) <0402> |
| 2.0pF(2R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 3.0pF(3R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 4.0pF(4R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 5.0pF(5R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 6.0pF(6R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 7.0pF(7R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 8.0pF(8R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 9.0pF(9R0) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 10pF(100) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 12pF(120) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 15pF(150) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 18pF(180) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 22pF(220) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 27pF(270) | 5 | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 33pF(330) | | 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 39pF(390) | | 3 | | 3 | 5 | 3 | 5 | 3 | 5 |
| 47pF(470) | | 3 | | 3 | | 3 | 5 | 3 | 5 |
| 56pF(560) | | 3 | | 3 | | 3 | 5 | 3 | 5 |
| 68pF(680) | | 3 | | 3 | | 3 | 5 | 3 | 5 |
| 82pF(820) | | 3 | | 3 | | 3 | 5 | 3 | 5 |
| 100pF(101) | | 3 | | 3 | | 3 | 5 | 3 | 5 |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Continued on the following page. ↗

Capacitance Table

Continued from the preceding page.

High Dielectric Constant Type X7R(R7)/X7S(C7)/X7T(D7)/X7U(E7) Characteristics

5 ex.5: T Dimension [mm]

| Capacitance | Rated Voltage [Vdc] | 0.4x0.2 (02) <01005> | | | | 0.6x0.3 (03) <0201> | | | | | 1.0x0.5 (15) <0402> | | | | | 1.6x0.8 (18) <0603> | | | | 2.0x1.25 (21) <0805> | | | | | | |
|--------------|---------------------|----------------------|---------|---------|---------|---------------------|---------|---------|---------|---------|---------------------|---------|---------|---------|---------|---------------------|--------|----------|---------|----------------------|---------|---------|----------|--------|--|--|
| | | 10 (1A) | 25 (1E) | 16 (1C) | 10 (1A) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | | |
| 68pF(680) | | 2 | | | | | | | | | | | | | | | | | | | | | | | | |
| 100pF(101) | | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 150pF(151) | | 2 | 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 220pF(221) | | 2 | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 330pF(331) | | 2 | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 470pF(471) | | 2 | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 680pF(681) | | | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 1000pF(102) | | | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 1500pF(152) | | | 3 | | | | | 5 | X, 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 2200pF(222) | | | | 3 | | | | 5 | 5 | X | | | | 8 | 8 | | | | | | | | | | | |
| 3300pF(332) | | | | 3 | | | | 5 | 5 | | X | | | 8 | 8 | | | | | | | | | | | |
| 4700pF(472) | | | | | 3 | | | 5 | 5 | 5 | X | | | 8 | 8 | | | | | | | | | | | |
| 6800pF(682) | | | | | | 3 | | 5 | 5 | X | | | | 8 | 8 | | | | | | | | | | | |
| 10000pF(103) | | | | | | | 3 | 5 | 5 | X | | | | 8 | 8 | 8 | | | | | | | | | | |
| 15000pF(153) | | | | | | | | 5 | 5 | 5 | | | | 8 | 8 | | | | | | | | | | | |
| 22000pF(223) | | | | | | | | 5 | 5 | 5 | | | | 8 | 8 | | | | | | | | | | | |
| 33000pF(333) | | | | | | | | 5 | 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 47000pF(473) | | | | | | | | 5 | 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 68000pF(683) | | | | | | | | 5 | 5 | | | | | 8 | 8 | | | | | | | | | | | |
| 0.10μF(104) | | | | | | | | 5 | 5 | 8 | 8 | 8 | | | | | | | | | | | | | | |
| 0.15μF(154) | | | | | | | | | | | | | 8 | 8 | | | | | | | | | | | | |
| 0.22μF(224) | | | | | | | | | | | | | 8 | 8 | | | | | | | | | | | | |
| 0.33μF(334) | | | | | | | | | | | | | | 8 | 8 | | | | | | | | | | | |
| 0.47μF(474) | | | | | | | | | | | | | | 8 | 8 | 8 | | | | | | | | | | |
| 0.68μF(684) | | | | | | | | | | | | | | | 8 | | | | | | | | | | | |
| 1.0μF(105) | | | | | | | | | | | | | | 8 | 8 | 5, 8 | | | | | | | | | | |
| 2.2μF(225) | | | | | | | | | | | | | | | | 8 | 8 | 8 | | | | | | | | |
| 4.7μF(475) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10μF(106) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22μF(226) | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Capacitance | Rated Voltage [Vdc] | 3.2x1.6 (31) <1206> | | | | | | | 3.2x2.5 (32) <1210> | | | | | | | | | | | | | | | | | |
|--------------|---------------------|---------------------|---------|---------|---------|---------|----------|--------|---------------------|---------|---------|---------|---------|---------|----------|--|--|--|--|--|--|--|--|--|--|--|
| | | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 100 (2A) | 50 (1H) | 35 (YA) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | | | | | | | | | | | |
| 15000pF(153) | | 9 | | | | | | | | | | | | | | | | | | | | | | | | |
| 22000pF(223) | | M | | | | | | | | | | | | | | | | | | | | | | | | |
| 33000pF(333) | | M | | | | | | | | | | | | | | | | | | | | | | | | |
| 47000pF(473) | | M | | | | | | | | | | | | | | | | | | | | | | | | |
| 68000pF(683) | | M | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.10μF(104) | | 9 | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.15μF(154) | | M | M | | | | | | | | | | | | | | | | | | | | | | | |
| 0.22μF(224) | | M | M | | | | | | | | | | | | | | | | | | | | | | | |
| 0.33μF(334) | | | | 9 | | | | | | | | | | | | | | | | | | | | | | |
| 0.47μF(474) | | M | M | | | | | | | | | | | | | | | | | | | | | | | |
| 0.68μF(684) | | M | M | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0μF(105) | | C | M | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2μF(225) | | | C | M | M | | | | | | | | | | | | | | | | | | | | | |
| 4.7μF(475) | | | C | C | C | | | | | | | | | | | | | | | | | | | | | |
| 10μF(106) | | | | C | C | C | | | | | | | | | | | | | | | | | | | | |
| 22μF(226) | | | | | C | C | | | | | | | | | | | | | | | | | | | | |
| 47μF(476) | | | | | | | | | | | | | | | | | | | | | | | | | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page. ↗

1

Capacitance Table

Continued from the preceding page.

High Dielectric Constant Type X6S(C8)/X6T(D8) Characteristics

5 ex.5: T Dimension [mm]

| Capacitance | LxW [mm] | 0.6x0.3 (03) <0201> | | 1.0x0.5 (15) <0402> | | 1.6x0.8 (18) <0603> | | | 2.0x1.25 (21) <0805> | | | | 3.2x1.6 (31) <1206> | | | | 3.2x2.5 (32) <1210> | | | | | | |
|--------------|----------|---------------------|---------|---------------------|--------|---------------------|----------|--------|----------------------|---------|---------|---------|---------------------|--------|---------|---------|---------------------|----------|--------|---------|---------|----------|---|
| | | 6.3 (0J) | 25 (1E) | 6.3 (0J) | 4 (0G) | 10 (1A) | 6.3 (0J) | 4 (0G) | 2.5 (0E) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 25 (1E) | 10 (1A) | 6.3 (0J) | |
| 15000pF(153) | | 3 | | | | | | | | | | | | | | | | | | | | | |
| 22000pF(223) | | 3 | | | | | | | | | | | | | | | | | | | | | |
| 33000pF(333) | | 3 | | | | | | | | | | | | | | | | | | | | | |
| 47000pF(473) | | 3 | | | | | | | | | | | | | | | | | | | | | |
| 68000pF(683) | | | 5 | | | | | | | | | | | | | | | | | | | | |
| 0.10μF(104) | | | 5 | | | | | | | | | | | | | | | | | | | | |
| 0.15μF(154) | | | | 5 | 5 | | | | | | | | | | | | | | | | | | |
| 0.22μF(224) | | | | 5 | 5 | | | | | | | | | | | | | | | | | | |
| 0.33μF(334) | | | | 5 | 5 | | | | | | | | | | | | | | | | | | |
| 0.47μF(474) | | | | 5 | 5 | | | | | | | | | | | | | | | | | | |
| 0.68μF(684) | | | | | 5 | | | | | | | | | | | | | | | | | | |
| 1.0μF(105) | | | | | | 5 | 5 | 8 | | | | 6 | | | | | | | | | | | |
| 2.2μF(225) | | | | | | 8 | 8 | | | | | 9 | | | | | 6 | | | | | | |
| 4.7μF(475) | | | | | | | | 8 | | | B | B | 9 | 9 | | | 9 | | | | | | |
| 10μF(106) | | | | | | | | | 8 | | | | B | 9, B | 9 | C | | | | | | D | |
| 22μF(226) | | | | | | | | | | | | | | B | | | C | C | | | | E | |
| 47μF(476) | | | | | | | | | | | | | | | | | C | C | | | | E | E |
| 100μF(107) | | | | | | | | | | | | | | | | | | C | | | | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page. ↗

Capacitance Table

Continued from the preceding page.

High Dielectric Constant Type X5R(R6) Characteristics

5 ex.5: T Dimension [mm] : Please refer to X7R(R7) etc Characteristics.

| Capacitance | Rated Voltage [Vdc] | 0.4x0.2 (02) <01005> | | 0.6x0.3 (03) <0201> | | | | 1.0x0.5 (15) <0402> | | | | | | | 1.6x0.8 (18) <0603> | | | | | | | |
|--------------|---------------------|----------------------|----------|---------------------|---------|---------|----------|---------------------|---------|---------|---------|---------|----------|--------|---------------------|---------|---------|---------|---------|----------|--------|--|
| | | 10 (1A) | 6.3 (0J) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | |
| 68pF(680) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 100pF(101) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 150pF(151) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 220pF(221) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 330pF(331) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 470pF(471) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 680pF(681) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 1000pF(102) | 2 | | | | | | | | | 5 | | | | | | | | | | | | |
| 1500pF(152) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 2200pF(222) | 2 | | | | | | | | | 5 | | | | | | | | | | | | |
| 3300pF(332) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 4700pF(472) | 2 | | | | | | | | | 5 | | | | | | | | | | | | |
| 6800pF(682) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 10000pF(103) | 2 | | | | | | | | | | | | | | | | | | | | | |
| 15000pF(153) | | | | | | | | | | | | | | | | | | | | | | |
| 22000pF(223) | | | | | | | | | | | | | | | | | | | | | | |
| 33000pF(333) | | | | | | | | | | | | | | | | | | | | | | |
| 47000pF(473) | | | | | | | | | | | | | | | | | | | | | | |
| 68000pF(683) | | | | | | | | | | | | | | | | | | | | | | |
| 0.10μF(104) | | | | | | | | | | 5 | 5 | 5 | | | | | | | | | | |
| 0.15μF(154) | | | | | | | | | | | | | | | | | | | | | | |
| 0.22μF(224) | | | | | | | | | | | | | | | | | | | | | | |
| 0.33μF(334) | | | | | | | | | | | | | | | | | | | | | | |
| 0.47μF(474) | | | | | | | | | | | | | | | | | | | | | | |
| 0.68μF(684) | | | | | | | | | | | | | | | | | | | | | | |
| 1.0μF(105) | | | | | | | | | | | | | | | | | | | | | | |
| 2.2μF(225) | | | | | | | | | | | | | | | | | | | | | | |
| 4.7μF(475) | | | | | | | | | | | | | | | | | | | | | | |
| 10μF(106) | | | | | | | | | | | | | | | | | | | | | | |

| Capacitance | Rated Voltage [Vdc] | 2.0x1.25 (21) <0805> | | | | | | | 3.2x1.6 (31) <1206> | | | | | | | 3.2x2.5 (32) <1210> | | | | | | | |
|--------------|---------------------|----------------------|---------|---------|---------|---------|----------|--------|---------------------|---------|---------|---------|---------|----------|--------|---------------------|---------|---------|---------|---------|---------|----------|--|
| | | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 100 (2A) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 100 (2A) | 50 (1H) | 35 (YA) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | |
| 6800pF(682) | | | | | | | | | | | | | | | | | | | | | | | |
| 10000pF(103) | | | | | | | | | | | | | | | | | | | | | | | |
| 15000pF(153) | | | | | | | | | | | | | | | | | | | | | | | |
| 22000pF(223) | | | | | | | | | | | | | | | | | | | | | | | |
| 33000pF(333) | | | | | | | | | | | | | | | | | | | | | | | |
| 47000pF(473) | | | | | | | | | | | | | | | | | | | | | | | |
| 68000pF(683) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.10μF(104) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.15μF(154) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.22μF(224) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.33μF(334) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.47μF(474) | | | | | | | | | | | | | | | | | | | | | | | |
| 0.68μF(684) | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0μF(105) | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2μF(225) | | | | | | | | | | | | | | | | | | | | | | | |
| 4.7μF(475) | | | | | | | | | | | | | | | | | | | | | | | |
| 10μF(106) | | | | | | | | | | | | | | | | | | | | | | | |
| 22μF(226) | | | | | | | | | | | | | | | | | | | | | | | |
| 47μF(476) | | | | | | | | | | | | | | | | | | | | | | | |
| 100μF(107) | | | | | | | | | | | | | | | | | | | | | | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

1

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 0.1pF(R10) | ±0.05pF(W) | | GRM0335C1HR10WD01D | GRM1555C1HR10WA01D |
| | ±0.1pF(B) | | GRM0335C1HR10BD01D | GRM1555C1HR10BA01D |
| 0.2pF(R20) | ±0.05pF(W) | GRM0225C1CR20WD05L | GRM0335C1HR20WD01D | GRM1555C1HR20WA01D |
| | ±0.1pF(B) | GRM0225C1CR20BD05L | GRM0335C1HR20BD01D | GRM1555C1HR20BA01D |
| 0.3pF(R30) | ±0.05pF(W) | GRM0225C1CR30WD05L | GRM0335C1HR30WD01D | GRM1555C1HR30WA01D |
| | ±0.1pF(B) | GRM0225C1CR30BD05L | GRM0335C1HR30BD01D | GRM1555C1HR30BA01D |
| 0.4pF(R40) | ±0.05pF(W) | GRM0225C1CR40WD05L | GRM0335C1HR40WD01D | GRM1555C1HR40WA01D |
| | ±0.1pF(B) | GRM0225C1CR40BD05L | GRM0335C1HR40BD01D | GRM1555C1HR40BA01D |
| 0.5pF(R50) | ±0.05pF(W) | GRM0225C1CR50WD05L | GRM0335C1HR50WD01D | GRM1555C1HR50WA01D |
| | ±0.1pF(B) | GRM0225C1CR50BD05L | GRM0335C1HR50BD01D | GRM1555C1HR50BA01D |
| 0.6pF(R60) | ±0.05pF(W) | GRM0225C1CR60WD05L | GRM0335C1HR60WD01D | GRM1555C1HR60WA01D |
| | ±0.1pF(B) | GRM0225C1CR60BD05L | GRM0335C1HR60BD01D | GRM1555C1HR60BA01D |
| 0.7pF(R70) | ±0.05pF(W) | GRM0225C1CR70WD05L | GRM0335C1HR70WD01D | GRM1555C1HR70WA01D |
| | ±0.1pF(B) | GRM0225C1CR70BD05L | GRM0335C1HR70BD01D | GRM1555C1HR70BA01D |
| 0.8pF(R80) | ±0.05pF(W) | GRM0225C1CR80WD05L | GRM0335C1HR80WD01D | GRM1555C1HR80WA01D |
| | ±0.1pF(B) | GRM0225C1CR80BD05L | GRM0335C1HR80BD01D | GRM1555C1HR80BA01D |
| 0.9pF(R90) | ±0.05pF(W) | GRM0225C1CR90WD05L | GRM0335C1HR90WD01D | GRM1555C1HR90WA01D |
| | ±0.1pF(B) | GRM0225C1CR90BD05L | GRM0335C1HR90BD01D | GRM1555C1HR90BA01D |
| 1.0pF(1R0) | ±0.05pF(W) | GRM0225C1C1R0WD05L | GRM0335C1H1R0WD01D | GRM1555C1H1R0WA01D |
| | ±0.1pF(B) | GRM0225C1C1R0BD05L | GRM0335C1H1R0BD01D | GRM1555C1H1R0BA01D |
| | ±0.25pF(C) | GRM0225C1C1R0CD05L | GRM0335C1H1R0CD01D | GRM1555C1H1R0CA01D |
| 1.1pF(1R1) | ±0.05pF(W) | GRM0225C1C1R1WD05L | GRM0335C1H1R1WD01D | GRM1555C1H1R1WA01D |
| | ±0.1pF(B) | GRM0225C1C1R1BD05L | GRM0335C1H1R1BD01D | GRM1555C1H1R1BA01D |
| | ±0.25pF(C) | GRM0225C1C1R1CD05L | GRM0335C1H1R1CD01D | GRM1555C1H1R1CA01D |
| 1.2pF(1R2) | ±0.05pF(W) | GRM0225C1C1R2WD05L | GRM0335C1H1R2WD01D | GRM1555C1H1R2WA01D |
| | ±0.1pF(B) | GRM0225C1C1R2BD05L | GRM0335C1H1R2BD01D | GRM1555C1H1R2BA01D |
| | ±0.25pF(C) | GRM0225C1C1R2CD05L | GRM0335C1H1R2CD01D | GRM1555C1H1R2CA01D |
| 1.3pF(1R3) | ±0.05pF(W) | GRM0225C1C1R3WD05L | GRM0335C1H1R3WD01D | GRM1555C1H1R3WA01D |
| | ±0.1pF(B) | GRM0225C1C1R3BD05L | GRM0335C1H1R3BD01D | GRM1555C1H1R3BA01D |
| | ±0.25pF(C) | GRM0225C1C1R3CD05L | GRM0335C1H1R3CD01D | GRM1555C1H1R3CA01D |
| 1.4pF(1R4) | ±0.05pF(W) | GRM0225C1C1R4WD05L | GRM0335C1H1R4WD01D | GRM1555C1H1R4WA01D |
| | ±0.1pF(B) | GRM0225C1C1R4BD05L | GRM0335C1H1R4BD01D | GRM1555C1H1R4BA01D |
| | ±0.25pF(C) | GRM0225C1C1R4CD05L | GRM0335C1H1R4CD01D | GRM1555C1H1R4CA01D |
| 1.5pF(1R5) | ±0.05pF(W) | GRM0225C1C1R5WD05L | GRM0335C1H1R5WD01D | GRM1555C1H1R5WA01D |
| | ±0.1pF(B) | GRM0225C1C1R5BD05L | GRM0335C1H1R5BD01D | GRM1555C1H1R5BA01D |
| | ±0.25pF(C) | GRM0225C1C1R5CD05L | GRM0335C1H1R5CD01D | GRM1555C1H1R5CA01D |
| 1.6pF(1R6) | ±0.05pF(W) | GRM0225C1C1R6WD05L | GRM0335C1H1R6WD01D | GRM1555C1H1R6WA01D |
| | ±0.1pF(B) | GRM0225C1C1R6BD05L | GRM0335C1H1R6BD01D | GRM1555C1H1R6BA01D |
| | ±0.25pF(C) | GRM0225C1C1R6CD05L | GRM0335C1H1R6CD01D | GRM1555C1H1R6CA01D |
| 1.7pF(1R7) | ±0.05pF(W) | GRM0225C1C1R7WD05L | GRM0335C1H1R7WD01D | GRM1555C1H1R7WA01D |
| | ±0.1pF(B) | GRM0225C1C1R7BD05L | GRM0335C1H1R7BD01D | GRM1555C1H1R7BA01D |
| | ±0.25pF(C) | GRM0225C1C1R7CD05L | GRM0335C1H1R7CD01D | GRM1555C1H1R7CA01D |
| 1.8pF(1R8) | ±0.05pF(W) | GRM0225C1C1R8WD05L | GRM0335C1H1R8WD01D | GRM1555C1H1R8WA01D |
| | ±0.1pF(B) | GRM0225C1C1R8BD05L | GRM0335C1H1R8BD01D | GRM1555C1H1R8BA01D |
| | ±0.25pF(C) | GRM0225C1C1R8CD05L | GRM0335C1H1R8CD01D | GRM1555C1H1R8CA01D |
| 1.9pF(1R9) | ±0.05pF(W) | GRM0225C1C1R9WD05L | GRM0335C1H1R9WD01D | GRM1555C1H1R9WA01D |
| | ±0.1pF(B) | GRM0225C1C1R9BD05L | GRM0335C1H1R9BD01D | GRM1555C1H1R9BA01D |
| | ±0.25pF(C) | GRM0225C1C1R9CD05L | GRM0335C1H1R9CD01D | GRM1555C1H1R9CA01D |
| 2.0pF(2R0) | ±0.05pF(W) | GRM0225C1C2R0WD05L | GRM0335C1H2R0WD01D | GRM1555C1H2R0WA01D |
| | ±0.1pF(B) | GRM0225C1C2R0BD05L | GRM0335C1H2R0BD01D | GRM1555C1H2R0BA01D |
| | ±0.25pF(C) | GRM0225C1C2R0CD05L | GRM0335C1H2R0CD01D | GRM1555C1H2R0CA01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **02** **2** **5C** **1C** **R20** **W** **D05** **L** ①Product ID ②Series ③Dimension (LxW) ④Dimension (T)
 ⑤Temperature Characteristics ⑥Rated Voltage ⑦Capacitance
 ⑧Capacitance Tolerance ⑨Individual Specification Code ⑩Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 2.1pF(2R1) | ±0.05pF(W) | GRM0225C1C2R1WD05L | GRM0335C1H2R1WD01D | GRM1555C1H2R1WA01D |
| | ±0.1pF(B) | GRM0225C1C2R1BD05L | GRM0335C1H2R1BD01D | GRM1555C1H2R1BA01D |
| | ±0.25pF(C) | GRM0225C1C2R1CD05L | GRM0335C1H2R1CD01D | GRM1555C1H2R1CA01D |
| 2.2pF(2R2) | ±0.05pF(W) | GRM0225C1C2R2WD05L | GRM0335C1H2R2WD01D | GRM1555C1H2R2WA01D |
| | ±0.1pF(B) | GRM0225C1C2R2BD05L | GRM0335C1H2R2BD01D | GRM1555C1H2R2BA01D |
| | ±0.25pF(C) | GRM0225C1C2R2CD05L | GRM0335C1H2R2CD01D | GRM1555C1H2R2CA01D |
| 2.3pF(2R3) | ±0.05pF(W) | GRM0225C1C2R3WD05L | GRM0335C1H2R3WD01D | GRM1555C1H2R3WA01D |
| | ±0.1pF(B) | GRM0225C1C2R3BD05L | GRM0335C1H2R3BD01D | GRM1555C1H2R3BA01D |
| | ±0.25pF(C) | GRM0225C1C2R3CD05L | GRM0335C1H2R3CD01D | GRM1555C1H2R3CA01D |
| 2.4pF(2R4) | ±0.05pF(W) | GRM0225C1C2R4WD05L | GRM0335C1H2R4WD01D | GRM1555C1H2R4WA01D |
| | ±0.1pF(B) | GRM0225C1C2R4BD05L | GRM0335C1H2R4BD01D | GRM1555C1H2R4BA01D |
| | ±0.25pF(C) | GRM0225C1C2R4CD05L | GRM0335C1H2R4CD01D | GRM1555C1H2R4CA01D |
| 2.5pF(2R5) | ±0.05pF(W) | GRM0225C1C2R5WD05L | GRM0335C1H2R5WD01D | GRM1555C1H2R5WA01D |
| | ±0.1pF(B) | GRM0225C1C2R5BD05L | GRM0335C1H2R5BD01D | GRM1555C1H2R5BA01D |
| | ±0.25pF(C) | GRM0225C1C2R5CD05L | GRM0335C1H2R5CD01D | GRM1555C1H2R5CA01D |
| 2.6pF(2R6) | ±0.05pF(W) | GRM0225C1C2R6WD05L | GRM0335C1H2R6WD01D | GRM1555C1H2R6WA01D |
| | ±0.1pF(B) | GRM0225C1C2R6BD05L | GRM0335C1H2R6BD01D | GRM1555C1H2R6BA01D |
| | ±0.25pF(C) | GRM0225C1C2R6CD05L | GRM0335C1H2R6CD01D | GRM1555C1H2R6CA01D |
| 2.7pF(2R7) | ±0.05pF(W) | GRM0225C1C2R7WD05L | GRM0335C1H2R7WD01D | GRM1555C1H2R7WA01D |
| | ±0.1pF(B) | GRM0225C1C2R7BD05L | GRM0335C1H2R7BD01D | GRM1555C1H2R7BA01D |
| | ±0.25pF(C) | GRM0225C1C2R7CD05L | GRM0335C1H2R7CD01D | GRM1555C1H2R7CA01D |
| 2.8pF(2R8) | ±0.05pF(W) | GRM0225C1C2R8WD05L | GRM0335C1H2R8WD01D | GRM1555C1H2R8WA01D |
| | ±0.1pF(B) | GRM0225C1C2R8BD05L | GRM0335C1H2R8BD01D | GRM1555C1H2R8BA01D |
| | ±0.25pF(C) | GRM0225C1C2R8CD05L | GRM0335C1H2R8CD01D | GRM1555C1H2R8CA01D |
| 2.9pF(2R9) | ±0.05pF(W) | GRM0225C1C2R9WD05L | GRM0335C1H2R9WD01D | GRM1555C1H2R9WA01D |
| | ±0.1pF(B) | GRM0225C1C2R9BD05L | GRM0335C1H2R9BD01D | GRM1555C1H2R9BA01D |
| | ±0.25pF(C) | GRM0225C1C2R9CD05L | GRM0335C1H2R9CD01D | GRM1555C1H2R9CA01D |
| 3.0pF(3R0) | ±0.05pF(W) | GRM0225C1C3R0WD05L | GRM0335C1H3R0WD01D | GRM1555C1H3R0WA01D |
| | ±0.1pF(B) | GRM0225C1C3R0BD05L | GRM0335C1H3R0BD01D | GRM1555C1H3R0BA01D |
| | ±0.25pF(C) | GRM0225C1C3R0CD05L | GRM0335C1H3R0CD01D | GRM1555C1H3R0CA01D |
| 3.1pF(3R1) | ±0.05pF(W) | GRM0225C1C3R1WD05L | GRM0335C1H3R1WD01D | GRM1555C1H3R1WA01D |
| | ±0.1pF(B) | GRM0225C1C3R1BD05L | GRM0335C1H3R1BD01D | GRM1555C1H3R1BA01D |
| | ±0.25pF(C) | GRM0225C1C3R1CD05L | GRM0335C1H3R1CD01D | GRM1555C1H3R1CA01D |
| 3.2pF(3R2) | ±0.05pF(W) | GRM0225C1C3R2WD05L | GRM0335C1H3R2WD01D | GRM1555C1H3R2WA01D |
| | ±0.1pF(B) | GRM0225C1C3R2BD05L | GRM0335C1H3R2BD01D | GRM1555C1H3R2BA01D |
| | ±0.25pF(C) | GRM0225C1C3R2CD05L | GRM0335C1H3R2CD01D | GRM1555C1H3R2CA01D |
| 3.3pF(3R3) | ±0.05pF(W) | GRM0225C1C3R3WD05L | GRM0335C1H3R3WD01D | GRM1555C1H3R3WA01D |
| | ±0.1pF(B) | GRM0225C1C3R3BD05L | GRM0335C1H3R3BD01D | GRM1555C1H3R3BA01D |
| | ±0.25pF(C) | GRM0225C1C3R3CD05L | GRM0335C1H3R3CD01D | GRM1555C1H3R3CA01D |
| 3.4pF(3R4) | ±0.05pF(W) | GRM0225C1C3R4WD05L | GRM0335C1H3R4WD01D | GRM1555C1H3R4WA01D |
| | ±0.1pF(B) | GRM0225C1C3R4BD05L | GRM0335C1H3R4BD01D | GRM1555C1H3R4BA01D |
| | ±0.25pF(C) | GRM0225C1C3R4CD05L | GRM0335C1H3R4CD01D | GRM1555C1H3R4CA01D |
| 3.5pF(3R5) | ±0.05pF(W) | GRM0225C1C3R5WD05L | GRM0335C1H3R5WD01D | GRM1555C1H3R5WA01D |
| | ±0.1pF(B) | GRM0225C1C3R5BD05L | GRM0335C1H3R5BD01D | GRM1555C1H3R5BA01D |
| | ±0.25pF(C) | GRM0225C1C3R5CD05L | GRM0335C1H3R5CD01D | GRM1555C1H3R5CA01D |
| 3.6pF(3R6) | ±0.05pF(W) | GRM0225C1C3R6WD05L | GRM0335C1H3R6WD01D | GRM1555C1H3R6WA01D |
| | ±0.1pF(B) | GRM0225C1C3R6BD05L | GRM0335C1H3R6BD01D | GRM1555C1H3R6BA01D |
| | ±0.25pF(C) | GRM0225C1C3R6CD05L | GRM0335C1H3R6CD01D | GRM1555C1H3R6CA01D |
| 3.7pF(3R7) | ±0.05pF(W) | GRM0225C1C3R7WD05L | GRM0335C1H3R7WD01D | GRM1555C1H3R7WA01D |
| | ±0.1pF(B) | GRM0225C1C3R7BD05L | GRM0335C1H3R7BD01D | GRM1555C1H3R7BA01D |
| | ±0.25pF(C) | GRM0225C1C3R7CD05L | GRM0335C1H3R7CD01D | GRM1555C1H3R7CA01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

1

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 3.8pF(3R8) | ±0.05pF(W) | GRM0225C1C3R8WD05L | GRM0335C1H3R8WD01D | GRM1555C1H3R8WA01D |
| | ±0.1pF(B) | GRM0225C1C3R8BD05L | GRM0335C1H3R8BD01D | GRM1555C1H3R8BA01D |
| | ±0.25pF(C) | GRM0225C1C3R8CD05L | GRM0335C1H3R8CD01D | GRM1555C1H3R8CA01D |
| 3.9pF(3R9) | ±0.05pF(W) | GRM0225C1C3R9WD05L | GRM0335C1H3R9WD01D | GRM1555C1H3R9WA01D |
| | ±0.1pF(B) | GRM0225C1C3R9BD05L | GRM0335C1H3R9BD01D | GRM1555C1H3R9BA01D |
| | ±0.25pF(C) | GRM0225C1C3R9CD05L | GRM0335C1H3R9CD01D | GRM1555C1H3R9CA01D |
| 4.0pF(4R0) | ±0.05pF(W) | GRM0225C1C4R0WD05L | GRM0335C1H4R0WD01D | GRM1555C1H4R0WA01D |
| | ±0.1pF(B) | GRM0225C1C4R0BD05L | GRM0335C1H4R0BD01D | GRM1555C1H4R0BA01D |
| | ±0.25pF(C) | GRM0225C1C4R0CD05L | GRM0335C1H4R0CD01D | GRM1555C1H4R0CA01D |
| 4.1pF(4R1) | ±0.05pF(W) | GRM0225C1C4R1WD05L | GRM0335C1H4R1WD01D | GRM1555C1H4R1WA01D |
| | ±0.1pF(B) | GRM0225C1C4R1BD05L | GRM0335C1H4R1BD01D | GRM1555C1H4R1BA01D |
| | ±0.25pF(C) | GRM0225C1C4R1CD05L | GRM0335C1H4R1CD01D | GRM1555C1H4R1CA01D |
| 4.2pF(4R2) | ±0.05pF(W) | GRM0225C1C4R2WD05L | GRM0335C1H4R2WD01D | GRM1555C1H4R2WA01D |
| | ±0.1pF(B) | GRM0225C1C4R2BD05L | GRM0335C1H4R2BD01D | GRM1555C1H4R2BA01D |
| | ±0.25pF(C) | GRM0225C1C4R2CD05L | GRM0335C1H4R2CD01D | GRM1555C1H4R2CA01D |
| 4.3pF(4R3) | ±0.05pF(W) | GRM0225C1C4R3WD05L | GRM0335C1H4R3WD01D | GRM1555C1H4R3WA01D |
| | ±0.1pF(B) | GRM0225C1C4R3BD05L | GRM0335C1H4R3BD01D | GRM1555C1H4R3BA01D |
| | ±0.25pF(C) | GRM0225C1C4R3CD05L | GRM0335C1H4R3CD01D | GRM1555C1H4R3CA01D |
| 4.4pF(4R4) | ±0.05pF(W) | GRM0225C1C4R4WD05L | GRM0335C1H4R4WD01D | GRM1555C1H4R4WA01D |
| | ±0.1pF(B) | GRM0225C1C4R4BD05L | GRM0335C1H4R4BD01D | GRM1555C1H4R4BA01D |
| | ±0.25pF(C) | GRM0225C1C4R4CD05L | GRM0335C1H4R4CD01D | GRM1555C1H4R4CA01D |
| 4.5pF(4R5) | ±0.05pF(W) | GRM0225C1C4R5WD05L | GRM0335C1H4R5WD01D | GRM1555C1H4R5WA01D |
| | ±0.1pF(B) | GRM0225C1C4R5BD05L | GRM0335C1H4R5BD01D | GRM1555C1H4R5BA01D |
| | ±0.25pF(C) | GRM0225C1C4R5CD05L | GRM0335C1H4R5CD01D | GRM1555C1H4R5CA01D |
| 4.6pF(4R6) | ±0.05pF(W) | GRM0225C1C4R6WD05L | GRM0335C1H4R6WD01D | GRM1555C1H4R6WA01D |
| | ±0.1pF(B) | GRM0225C1C4R6BD05L | GRM0335C1H4R6BD01D | GRM1555C1H4R6BA01D |
| | ±0.25pF(C) | GRM0225C1C4R6CD05L | GRM0335C1H4R6CD01D | GRM1555C1H4R6CA01D |
| 4.7pF(4R7) | ±0.05pF(W) | GRM0225C1C4R7WD05L | GRM0335C1H4R7WD01D | GRM1555C1H4R7WA01D |
| | ±0.1pF(B) | GRM0225C1C4R7BD05L | GRM0335C1H4R7BD01D | GRM1555C1H4R7BA01D |
| | ±0.25pF(C) | GRM0225C1C4R7CD05L | GRM0335C1H4R7CD01D | GRM1555C1H4R7CA01D |
| 4.8pF(4R8) | ±0.05pF(W) | GRM0225C1C4R8WD05L | GRM0335C1H4R8WD01D | GRM1555C1H4R8WA01D |
| | ±0.1pF(B) | GRM0225C1C4R8BD05L | GRM0335C1H4R8BD01D | GRM1555C1H4R8BA01D |
| | ±0.25pF(C) | GRM0225C1C4R8CD05L | GRM0335C1H4R8CD01D | GRM1555C1H4R8CA01D |
| 4.9pF(4R9) | ±0.05pF(W) | GRM0225C1C4R9WD05L | GRM0335C1H4R9WD01D | GRM1555C1H4R9WA01D |
| | ±0.1pF(B) | GRM0225C1C4R9BD05L | GRM0335C1H4R9BD01D | GRM1555C1H4R9BA01D |
| | ±0.25pF(C) | GRM0225C1C4R9CD05L | GRM0335C1H4R9CD01D | GRM1555C1H4R9CA01D |
| 5.0pF(5R0) | ±0.05pF(W) | GRM0225C1C5R0WD05L | GRM0335C1H5R0WD01D | GRM1555C1H5R0WA01D |
| | ±0.1pF(B) | GRM0225C1C5R0BD05L | GRM0335C1H5R0BD01D | GRM1555C1H5R0BA01D |
| | ±0.25pF(C) | GRM0225C1C5R0CD05L | GRM0335C1H5R0CD01D | GRM1555C1H5R0CA01D |
| 5.1pF(5R1) | ±0.05pF(W) | GRM0225C1C5R1WD05L | GRM0335C1H5R1WD01D | GRM1555C1H5R1WA01D |
| | ±0.1pF(B) | GRM0225C1C5R1BD05L | GRM0335C1H5R1BD01D | GRM1555C1H5R1BA01D |
| | ±0.25pF(C) | GRM0225C1C5R1CD05L | GRM0335C1H5R1CD01D | GRM1555C1H5R1CA01D |
| | ±0.5pF(D) | GRM0225C1C5R1DD05L | GRM0335C1H5R1DD01D | GRM1555C1H5R1DA01D |
| 5.2pF(5R2) | ±0.05pF(W) | GRM0225C1C5R2WD05L | GRM0335C1H5R2WD01D | GRM1555C1H5R2WA01D |
| | ±0.1pF(B) | GRM0225C1C5R2BD05L | GRM0335C1H5R2BD01D | GRM1555C1H5R2BA01D |
| | ±0.25pF(C) | GRM0225C1C5R2CD05L | GRM0335C1H5R2CD01D | GRM1555C1H5R2CA01D |
| | ±0.5pF(D) | GRM0225C1C5R2DD05L | GRM0335C1H5R2DD01D | GRM1555C1H5R2DA01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **02** **2** **5C** **1C** **3R8** **W** **D05** **L** **1** **2** **3** **4** **5** **6** **7** **8** **9** **10**

①Product ID ②Series ③Dimension (LxW) ④Dimension (T)
 ⑤Temperature Characteristics ⑥Rated Voltage ⑦Capacitance
 ⑧Capacitance Tolerance ⑨Individual Specification Code ⑩Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 5.3pF(5R3) | ±0.05pF(W) | GRM0225C1C5R3WD05L | GRM0335C1H5R3WD01D | GRM1555C1H5R3WA01D |
| | ±0.1pF(B) | GRM0225C1C5R3BD05L | GRM0335C1H5R3BD01D | GRM1555C1H5R3BA01D |
| | ±0.25pF(C) | GRM0225C1C5R3CD05L | GRM0335C1H5R3CD01D | GRM1555C1H5R3CA01D |
| | ±0.5pF(D) | GRM0225C1C5R3DD05L | GRM0335C1H5R3DD01D | GRM1555C1H5R3DA01D |
| 5.4pF(5R4) | ±0.05pF(W) | GRM0225C1C5R4WD05L | GRM0335C1H5R4WD01D | GRM1555C1H5R4WA01D |
| | ±0.1pF(B) | GRM0225C1C5R4BD05L | GRM0335C1H5R4BD01D | GRM1555C1H5R4BA01D |
| | ±0.25pF(C) | GRM0225C1C5R4CD05L | GRM0335C1H5R4CD01D | GRM1555C1H5R4CA01D |
| | ±0.5pF(D) | GRM0225C1C5R4DD05L | GRM0335C1H5R4DD01D | GRM1555C1H5R4DA01D |
| 5.5pF(5R5) | ±0.05pF(W) | GRM0225C1C5R5WD05L | GRM0335C1H5R5WD01D | GRM1555C1H5R5WA01D |
| | ±0.1pF(B) | GRM0225C1C5R5BD05L | GRM0335C1H5R5BD01D | GRM1555C1H5R5BA01D |
| | ±0.25pF(C) | GRM0225C1C5R5CD05L | GRM0335C1H5R5CD01D | GRM1555C1H5R5CA01D |
| | ±0.5pF(D) | GRM0225C1C5R5DD05L | GRM0335C1H5R5DD01D | GRM1555C1H5R5DA01D |
| 5.6pF(5R6) | ±0.05pF(W) | GRM0225C1C5R6WD05L | GRM0335C1H5R6WD01D | GRM1555C1H5R6WA01D |
| | ±0.1pF(B) | GRM0225C1C5R6BD05L | GRM0335C1H5R6BD01D | GRM1555C1H5R6BA01D |
| | ±0.25pF(C) | GRM0225C1C5R6CD05L | GRM0335C1H5R6CD01D | GRM1555C1H5R6CA01D |
| | ±0.5pF(D) | GRM0225C1C5R6DD05L | GRM0335C1H5R6DD01D | GRM1555C1H5R6DA01D |
| 5.7pF(5R7) | ±0.05pF(W) | GRM0225C1C5R7WD05L | GRM0335C1H5R7WD01D | GRM1555C1H5R7WA01D |
| | ±0.1pF(B) | GRM0225C1C5R7BD05L | GRM0335C1H5R7BD01D | GRM1555C1H5R7BA01D |
| | ±0.25pF(C) | GRM0225C1C5R7CD05L | GRM0335C1H5R7CD01D | GRM1555C1H5R7CA01D |
| | ±0.5pF(D) | GRM0225C1C5R7DD05L | GRM0335C1H5R7DD01D | GRM1555C1H5R7DA01D |
| 5.8pF(5R8) | ±0.05pF(W) | GRM0225C1C5R8WD05L | GRM0335C1H5R8WD01D | GRM1555C1H5R8WA01D |
| | ±0.1pF(B) | GRM0225C1C5R8BD05L | GRM0335C1H5R8BD01D | GRM1555C1H5R8BA01D |
| | ±0.25pF(C) | GRM0225C1C5R8CD05L | GRM0335C1H5R8CD01D | GRM1555C1H5R8CA01D |
| | ±0.5pF(D) | GRM0225C1C5R8DD05L | GRM0335C1H5R8DD01D | GRM1555C1H5R8DA01D |
| 5.9pF(5R9) | ±0.05pF(W) | GRM0225C1C5R9WD05L | GRM0335C1H5R9WD01D | GRM1555C1H5R9WA01D |
| | ±0.1pF(B) | GRM0225C1C5R9BD05L | GRM0335C1H5R9BD01D | GRM1555C1H5R9BA01D |
| | ±0.25pF(C) | GRM0225C1C5R9CD05L | GRM0335C1H5R9CD01D | GRM1555C1H5R9CA01D |
| | ±0.5pF(D) | GRM0225C1C5R9DD05L | GRM0335C1H5R9DD01D | GRM1555C1H5R9DA01D |
| 6.0pF(6R0) | ±0.05pF(W) | GRM0225C1C6R0WD05L | GRM0335C1H6R0WD01D | GRM1555C1H6R0WA01D |
| | ±0.1pF(B) | GRM0225C1C6R0BD05L | GRM0335C1H6R0BD01D | GRM1555C1H6R0BA01D |
| | ±0.25pF(C) | GRM0225C1C6R0CD05L | GRM0335C1H6R0CD01D | GRM1555C1H6R0CA01D |
| | ±0.5pF(D) | GRM0225C1C6R0DD05L | GRM0335C1H6R0DD01D | GRM1555C1H6R0DA01D |
| 6.1pF(6R1) | ±0.05pF(W) | GRM0225C1C6R1WD05L | GRM0335C1H6R1WD01D | GRM1555C1H6R1WA01D |
| | ±0.1pF(B) | GRM0225C1C6R1BD05L | GRM0335C1H6R1BD01D | GRM1555C1H6R1BA01D |
| | ±0.25pF(C) | GRM0225C1C6R1CD05L | GRM0335C1H6R1CD01D | GRM1555C1H6R1CA01D |
| | ±0.5pF(D) | GRM0225C1C6R1DD05L | GRM0335C1H6R1DD01D | GRM1555C1H6R1DA01D |
| 6.2pF(6R2) | ±0.05pF(W) | GRM0225C1C6R2WD05L | GRM0335C1H6R2WD01D | GRM1555C1H6R2WA01D |
| | ±0.1pF(B) | GRM0225C1C6R2BD05L | GRM0335C1H6R2BD01D | GRM1555C1H6R2BA01D |
| | ±0.25pF(C) | GRM0225C1C6R2CD05L | GRM0335C1H6R2CD01D | GRM1555C1H6R2CA01D |
| | ±0.5pF(D) | GRM0225C1C6R2DD05L | GRM0335C1H6R2DD01D | GRM1555C1H6R2DA01D |
| 6.3pF(6R3) | ±0.05pF(W) | GRM0225C1C6R3WD05L | GRM0335C1H6R3WD01D | GRM1555C1H6R3WA01D |
| | ±0.1pF(B) | GRM0225C1C6R3BD05L | GRM0335C1H6R3BD01D | GRM1555C1H6R3BA01D |
| | ±0.25pF(C) | GRM0225C1C6R3CD05L | GRM0335C1H6R3CD01D | GRM1555C1H6R3CA01D |
| | ±0.5pF(D) | GRM0225C1C6R3DD05L | GRM0335C1H6R3DD01D | GRM1555C1H6R3DA01D |
| 6.4pF(6R4) | ±0.05pF(W) | GRM0225C1C6R4WD05L | GRM0335C1H6R4WD01D | GRM1555C1H6R4WA01D |
| | ±0.1pF(B) | GRM0225C1C6R4BD05L | GRM0335C1H6R4BD01D | GRM1555C1H6R4BA01D |
| | ±0.25pF(C) | GRM0225C1C6R4CD05L | GRM0335C1H6R4CD01D | GRM1555C1H6R4CA01D |
| | ±0.5pF(D) | GRM0225C1C6R4DD05L | GRM0335C1H6R4DD01D | GRM1555C1H6R4DA01D |
| 6.5pF(6R5) | ±0.05pF(W) | GRM0225C1C6R5WD05L | GRM0335C1H6R5WD01D | GRM1555C1H6R5WA01D |
| | ±0.1pF(B) | GRM0225C1C6R5BD05L | GRM0335C1H6R5BD01D | GRM1555C1H6R5BA01D |
| | ±0.25pF(C) | GRM0225C1C6R5CD05L | GRM0335C1H6R5CD01D | GRM1555C1H6R5CA01D |
| | ±0.5pF(D) | GRM0225C1C6R5DD05L | GRM0335C1H6R5DD01D | GRM1555C1H6R5DA01D |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 6.6pF(6R6) | ±0.05pF(W) | GRM0225C1C6R6WD05L | GRM0335C1H6R6WD01D | GRM1555C1H6R6WA01D |
| | ±0.1pF(B) | GRM0225C1C6R6BD05L | GRM0335C1H6R6BD01D | GRM1555C1H6R6BA01D |
| | ±0.25pF(C) | GRM0225C1C6R6CD05L | GRM0335C1H6R6CD01D | GRM1555C1H6R6CA01D |
| | ±0.5pF(D) | GRM0225C1C6R6DD05L | GRM0335C1H6R6DD01D | GRM1555C1H6R6DA01D |
| 6.7pF(6R7) | ±0.05pF(W) | GRM0225C1C6R7WD05L | GRM0335C1H6R7WD01D | GRM1555C1H6R7WA01D |
| | ±0.1pF(B) | GRM0225C1C6R7BD05L | GRM0335C1H6R7BD01D | GRM1555C1H6R7BA01D |
| | ±0.25pF(C) | GRM0225C1C6R7CD05L | GRM0335C1H6R7CD01D | GRM1555C1H6R7CA01D |
| | ±0.5pF(D) | GRM0225C1C6R7DD05L | GRM0335C1H6R7DD01D | GRM1555C1H6R7DA01D |
| 6.8pF(6R8) | ±0.05pF(W) | GRM0225C1C6R8WD05L | GRM0335C1H6R8WD01D | GRM1555C1H6R8WA01D |
| | ±0.1pF(B) | GRM0225C1C6R8BD05L | GRM0335C1H6R8BD01D | GRM1555C1H6R8BA01D |
| | ±0.25pF(C) | GRM0225C1C6R8CD05L | GRM0335C1H6R8CD01D | GRM1555C1H6R8CA01D |
| | ±0.5pF(D) | GRM0225C1C6R8DD05L | GRM0335C1H6R8DD01D | GRM1555C1H6R8DA01D |
| 6.9pF(6R9) | ±0.05pF(W) | GRM0225C1C6R9WD05L | GRM0335C1H6R9WD01D | GRM1555C1H6R9WA01D |
| | ±0.1pF(B) | GRM0225C1C6R9BD05L | GRM0335C1H6R9BD01D | GRM1555C1H6R9BA01D |
| | ±0.25pF(C) | GRM0225C1C6R9CD05L | GRM0335C1H6R9CD01D | GRM1555C1H6R9CA01D |
| | ±0.5pF(D) | GRM0225C1C6R9DD05L | GRM0335C1H6R9DD01D | GRM1555C1H6R9DA01D |
| 7.0pF(7R0) | ±0.05pF(W) | GRM0225C1C7R0WD05L | GRM0335C1H7R0WD01D | GRM1555C1H7R0WA01D |
| | ±0.1pF(B) | GRM0225C1C7R0BD05L | GRM0335C1H7R0BD01D | GRM1555C1H7R0BA01D |
| | ±0.25pF(C) | GRM0225C1C7R0CD05L | GRM0335C1H7R0CD01D | GRM1555C1H7R0CA01D |
| | ±0.5pF(D) | GRM0225C1C7R0DD05L | GRM0335C1H7R0DD01D | GRM1555C1H7R0DA01D |
| 7.1pF(7R1) | ±0.05pF(W) | GRM0225C1C7R1WD05L | GRM0335C1H7R1WD01D | GRM1555C1H7R1WA01D |
| | ±0.1pF(B) | GRM0225C1C7R1BD05L | GRM0335C1H7R1BD01D | GRM1555C1H7R1BA01D |
| | ±0.25pF(C) | GRM0225C1C7R1CD05L | GRM0335C1H7R1CD01D | GRM1555C1H7R1CA01D |
| | ±0.5pF(D) | GRM0225C1C7R1DD05L | GRM0335C1H7R1DD01D | GRM1555C1H7R1DA01D |
| 7.2pF(7R2) | ±0.05pF(W) | GRM0225C1C7R2WD05L | GRM0335C1H7R2WD01D | GRM1555C1H7R2WA01D |
| | ±0.1pF(B) | GRM0225C1C7R2BD05L | GRM0335C1H7R2BD01D | GRM1555C1H7R2BA01D |
| | ±0.25pF(C) | GRM0225C1C7R2CD05L | GRM0335C1H7R2CD01D | GRM1555C1H7R2CA01D |
| | ±0.5pF(D) | GRM0225C1C7R2DD05L | GRM0335C1H7R2DD01D | GRM1555C1H7R2DA01D |
| 7.3pF(7R3) | ±0.05pF(W) | GRM0225C1C7R3WD05L | GRM0335C1H7R3WD01D | GRM1555C1H7R3WA01D |
| | ±0.1pF(B) | GRM0225C1C7R3BD05L | GRM0335C1H7R3BD01D | GRM1555C1H7R3BA01D |
| | ±0.25pF(C) | GRM0225C1C7R3CD05L | GRM0335C1H7R3CD01D | GRM1555C1H7R3CA01D |
| | ±0.5pF(D) | GRM0225C1C7R3DD05L | GRM0335C1H7R3DD01D | GRM1555C1H7R3DA01D |
| 7.4pF(7R4) | ±0.05pF(W) | GRM0225C1C7R4WD05L | GRM0335C1H7R4WD01D | GRM1555C1H7R4WA01D |
| | ±0.1pF(B) | GRM0225C1C7R4BD05L | GRM0335C1H7R4BD01D | GRM1555C1H7R4BA01D |
| | ±0.25pF(C) | GRM0225C1C7R4CD05L | GRM0335C1H7R4CD01D | GRM1555C1H7R4CA01D |
| | ±0.5pF(D) | GRM0225C1C7R4DD05L | GRM0335C1H7R4DD01D | GRM1555C1H7R4DA01D |
| 7.5pF(7R5) | ±0.05pF(W) | GRM0225C1C7R5WD05L | GRM0335C1H7R5WD01D | GRM1555C1H7R5WA01D |
| | ±0.1pF(B) | GRM0225C1C7R5BD05L | GRM0335C1H7R5BD01D | GRM1555C1H7R5BA01D |
| | ±0.25pF(C) | GRM0225C1C7R5CD05L | GRM0335C1H7R5CD01D | GRM1555C1H7R5CA01D |
| | ±0.5pF(D) | GRM0225C1C7R5DD05L | GRM0335C1H7R5DD01D | GRM1555C1H7R5DA01D |
| 7.6pF(7R6) | ±0.05pF(W) | GRM0225C1C7R6WD05L | GRM0335C1H7R6WD01D | GRM1555C1H7R6WA01D |
| | ±0.1pF(B) | GRM0225C1C7R6BD05L | GRM0335C1H7R6BD01D | GRM1555C1H7R6BA01D |
| | ±0.25pF(C) | GRM0225C1C7R6CD05L | GRM0335C1H7R6CD01D | GRM1555C1H7R6CA01D |
| | ±0.5pF(D) | GRM0225C1C7R6DD05L | GRM0335C1H7R6DD01D | GRM1555C1H7R6DA01D |
| 7.7pF(7R7) | ±0.05pF(W) | GRM0225C1C7R7WD05L | GRM0335C1H7R7WD01D | GRM1555C1H7R7WA01D |
| | ±0.1pF(B) | GRM0225C1C7R7BD05L | GRM0335C1H7R7BD01D | GRM1555C1H7R7BA01D |
| | ±0.25pF(C) | GRM0225C1C7R7CD05L | GRM0335C1H7R7CD01D | GRM1555C1H7R7CA01D |
| | ±0.5pF(D) | GRM0225C1C7R7DD05L | GRM0335C1H7R7DD01D | GRM1555C1H7R7DA01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) GR M 02 2 5C 1C 6R6 W D05 L
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series ③ Dimension (LxW) ④ Dimension (T)
 ⑤ Temperature Characteristics ⑥ Rated Voltage ⑦ Capacitance
 ⑧ Capacitance Tolerance ⑨ Individual Specification Code ⑩ Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 7.8pF(7R8) | ±0.05pF(W) | GRM0225C1C7R8WD05L | GRM0335C1H7R8WD01D | GRM1555C1H7R8WA01D |
| | ±0.1pF(B) | GRM0225C1C7R8BD05L | GRM0335C1H7R8BD01D | GRM1555C1H7R8BA01D |
| | ±0.25pF(C) | GRM0225C1C7R8CD05L | GRM0335C1H7R8CD01D | GRM1555C1H7R8CA01D |
| | ±0.5pF(D) | GRM0225C1C7R8DD05L | GRM0335C1H7R8DD01D | GRM1555C1H7R8DA01D |
| 7.9pF(7R9) | ±0.05pF(W) | GRM0225C1C7R9WD05L | GRM0335C1H7R9WD01D | GRM1555C1H7R9WA01D |
| | ±0.1pF(B) | GRM0225C1C7R9BD05L | GRM0335C1H7R9BD01D | GRM1555C1H7R9BA01D |
| | ±0.25pF(C) | GRM0225C1C7R9CD05L | GRM0335C1H7R9CD01D | GRM1555C1H7R9CA01D |
| | ±0.5pF(D) | GRM0225C1C7R9DD05L | GRM0335C1H7R9DD01D | GRM1555C1H7R9DA01D |
| 8.0pF(8R0) | ±0.05pF(W) | GRM0225C1C8R0WD05L | GRM0335C1H8R0WD01D | GRM1555C1H8R0WA01D |
| | ±0.1pF(B) | GRM0225C1C8R0BD05L | GRM0335C1H8R0BD01D | GRM1555C1H8R0BA01D |
| | ±0.25pF(C) | GRM0225C1C8R0CD05L | GRM0335C1H8R0CD01D | GRM1555C1H8R0CA01D |
| | ±0.5pF(D) | GRM0225C1C8R0DD05L | GRM0335C1H8R0DD01D | GRM1555C1H8R0DA01D |
| 8.1pF(8R1) | ±0.05pF(W) | GRM0225C1C8R1WD05L | GRM0335C1H8R1WD01D | GRM1555C1H8R1WA01D |
| | ±0.1pF(B) | GRM0225C1C8R1BD05L | GRM0335C1H8R1BD01D | GRM1555C1H8R1BA01D |
| | ±0.25pF(C) | GRM0225C1C8R1CD05L | GRM0335C1H8R1CD01D | GRM1555C1H8R1CA01D |
| | ±0.5pF(D) | GRM0225C1C8R1DD05L | GRM0335C1H8R1DD01D | GRM1555C1H8R1DA01D |
| 8.2pF(8R2) | ±0.05pF(W) | GRM0225C1C8R2WD05L | GRM0335C1H8R2WD01D | GRM1555C1H8R2WA01D |
| | ±0.1pF(B) | GRM0225C1C8R2BD05L | GRM0335C1H8R2BD01D | GRM1555C1H8R2BA01D |
| | ±0.25pF(C) | GRM0225C1C8R2CD05L | GRM0335C1H8R2CD01D | GRM1555C1H8R2CA01D |
| | ±0.5pF(D) | GRM0225C1C8R2DD05L | GRM0335C1H8R2DD01D | GRM1555C1H8R2DA01D |
| 8.3pF(8R3) | ±0.05pF(W) | GRM0225C1C8R3WD05L | GRM0335C1H8R3WD01D | GRM1555C1H8R3WA01D |
| | ±0.1pF(B) | GRM0225C1C8R3BD05L | GRM0335C1H8R3BD01D | GRM1555C1H8R3BA01D |
| | ±0.25pF(C) | GRM0225C1C8R3CD05L | GRM0335C1H8R3CD01D | GRM1555C1H8R3CA01D |
| | ±0.5pF(D) | GRM0225C1C8R3DD05L | GRM0335C1H8R3DD01D | GRM1555C1H8R3DA01D |
| 8.4pF(8R4) | ±0.05pF(W) | GRM0225C1C8R4WD05L | GRM0335C1H8R4WD01D | GRM1555C1H8R4WA01D |
| | ±0.1pF(B) | GRM0225C1C8R4BD05L | GRM0335C1H8R4BD01D | GRM1555C1H8R4BA01D |
| | ±0.25pF(C) | GRM0225C1C8R4CD05L | GRM0335C1H8R4CD01D | GRM1555C1H8R4CA01D |
| | ±0.5pF(D) | GRM0225C1C8R4DD05L | GRM0335C1H8R4DD01D | GRM1555C1H8R4DA01D |
| 8.5pF(8R5) | ±0.05pF(W) | GRM0225C1C8R5WD05L | GRM0335C1H8R5WD01D | GRM1555C1H8R5WA01D |
| | ±0.1pF(B) | GRM0225C1C8R5BD05L | GRM0335C1H8R5BD01D | GRM1555C1H8R5BA01D |
| | ±0.25pF(C) | GRM0225C1C8R5CD05L | GRM0335C1H8R5CD01D | GRM1555C1H8R5CA01D |
| | ±0.5pF(D) | GRM0225C1C8R5DD05L | GRM0335C1H8R5DD01D | GRM1555C1H8R5DA01D |
| 8.6pF(8R6) | ±0.05pF(W) | GRM0225C1C8R6WD05L | GRM0335C1H8R6WD01D | GRM1555C1H8R6WA01D |
| | ±0.1pF(B) | GRM0225C1C8R6BD05L | GRM0335C1H8R6BD01D | GRM1555C1H8R6BA01D |
| | ±0.25pF(C) | GRM0225C1C8R6CD05L | GRM0335C1H8R6CD01D | GRM1555C1H8R6CA01D |
| | ±0.5pF(D) | GRM0225C1C8R6DD05L | GRM0335C1H8R6DD01D | GRM1555C1H8R6DA01D |
| 8.7pF(8R7) | ±0.05pF(W) | GRM0225C1C8R7WD05L | GRM0335C1H8R7WD01D | GRM1555C1H8R7WA01D |
| | ±0.1pF(B) | GRM0225C1C8R7BD05L | GRM0335C1H8R7BD01D | GRM1555C1H8R7BA01D |
| | ±0.25pF(C) | GRM0225C1C8R7CD05L | GRM0335C1H8R7CD01D | GRM1555C1H8R7CA01D |
| | ±0.5pF(D) | GRM0225C1C8R7DD05L | GRM0335C1H8R7DD01D | GRM1555C1H8R7DA01D |
| 8.8pF(8R8) | ±0.05pF(W) | GRM0225C1C8R8WD05L | GRM0335C1H8R8WD01D | GRM1555C1H8R8WA01D |
| | ±0.1pF(B) | GRM0225C1C8R8BD05L | GRM0335C1H8R8BD01D | GRM1555C1H8R8BA01D |
| | ±0.25pF(C) | GRM0225C1C8R8CD05L | GRM0335C1H8R8CD01D | GRM1555C1H8R8CA01D |
| | ±0.5pF(D) | GRM0225C1C8R8DD05L | GRM0335C1H8R8DD01D | GRM1555C1H8R8DA01D |
| 8.9pF(8R9) | ±0.05pF(W) | GRM0225C1C8R9WD05L | GRM0335C1H8R9WD01D | GRM1555C1H8R9WA01D |
| | ±0.1pF(B) | GRM0225C1C8R9BD05L | GRM0335C1H8R9BD01D | GRM1555C1H8R9BA01D |
| | ±0.25pF(C) | GRM0225C1C8R9CD05L | GRM0335C1H8R9CD01D | GRM1555C1H8R9CA01D |
| | ±0.5pF(D) | GRM0225C1C8R9DD05L | GRM0335C1H8R9DD01D | GRM1555C1H8R9DA01D |
| 9.0pF(9R0) | ±0.05pF(W) | GRM0225C1C9R0WD05L | GRM0335C1H9R0WD01D | GRM1555C1H9R0WA01D |
| | ±0.1pF(B) | GRM0225C1C9R0BD05L | GRM0335C1H9R0BD01D | GRM1555C1H9R0BA01D |
| | ±0.25pF(C) | GRM0225C1C9R0CD05L | GRM0335C1H9R0CD01D | GRM1555C1H9R0CA01D |
| | ±0.5pF(D) | GRM0225C1C9R0DD05L | GRM0335C1H9R0DD01D | GRM1555C1H9R0DA01D |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 50(1H) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 9.1pF(9R1) | ±0.05pF(W) | GRM0225C1C9R1WD05L | GRM0335C1H9R1WD01D | GRM1555C1H9R1WA01D |
| | ±0.1pF(B) | GRM0225C1C9R1BD05L | GRM0335C1H9R1BD01D | GRM1555C1H9R1BA01D |
| | ±0.25pF(C) | GRM0225C1C9R1CD05L | GRM0335C1H9R1CD01D | GRM1555C1H9R1CA01D |
| | ±0.5pF(D) | GRM0225C1C9R1DD05L | GRM0335C1H9R1DD01D | GRM1555C1H9R1DA01D |
| 9.2pF(9R2) | ±0.05pF(W) | GRM0225C1C9R2WD05L | GRM0335C1H9R2WD01D | GRM1555C1H9R2WA01D |
| | ±0.1pF(B) | GRM0225C1C9R2BD05L | GRM0335C1H9R2BD01D | GRM1555C1H9R2BA01D |
| | ±0.25pF(C) | GRM0225C1C9R2CD05L | GRM0335C1H9R2CD01D | GRM1555C1H9R2CA01D |
| | ±0.5pF(D) | GRM0225C1C9R2DD05L | GRM0335C1H9R2DD01D | GRM1555C1H9R2DA01D |
| 9.3pF(9R3) | ±0.05pF(W) | GRM0225C1C9R3WD05L | GRM0335C1H9R3WD01D | GRM1555C1H9R3WA01D |
| | ±0.1pF(B) | GRM0225C1C9R3BD05L | GRM0335C1H9R3BD01D | GRM1555C1H9R3BA01D |
| | ±0.25pF(C) | GRM0225C1C9R3CD05L | GRM0335C1H9R3CD01D | GRM1555C1H9R3CA01D |
| | ±0.5pF(D) | GRM0225C1C9R3DD05L | GRM0335C1H9R3DD01D | GRM1555C1H9R3DA01D |
| 9.4pF(9R4) | ±0.05pF(W) | GRM0225C1C9R4WD05L | GRM0335C1H9R4WD01D | GRM1555C1H9R4WA01D |
| | ±0.1pF(B) | GRM0225C1C9R4BD05L | GRM0335C1H9R4BD01D | GRM1555C1H9R4BA01D |
| | ±0.25pF(C) | GRM0225C1C9R4CD05L | GRM0335C1H9R4CD01D | GRM1555C1H9R4CA01D |
| | ±0.5pF(D) | GRM0225C1C9R4DD05L | GRM0335C1H9R4DD01D | GRM1555C1H9R4DA01D |
| 9.5pF(9R5) | ±0.05pF(W) | GRM0225C1C9R5WD05L | GRM0335C1H9R5WD01D | GRM1555C1H9R5WA01D |
| | ±0.1pF(B) | GRM0225C1C9R5BD05L | GRM0335C1H9R5BD01D | GRM1555C1H9R5BA01D |
| | ±0.25pF(C) | GRM0225C1C9R5CD05L | GRM0335C1H9R5CD01D | GRM1555C1H9R5CA01D |
| | ±0.5pF(D) | GRM0225C1C9R5DD05L | GRM0335C1H9R5DD01D | GRM1555C1H9R5DA01D |
| 9.6pF(9R6) | ±0.05pF(W) | GRM0225C1C9R6WD05L | GRM0335C1H9R6WD01D | GRM1555C1H9R6WA01D |
| | ±0.1pF(B) | GRM0225C1C9R6BD05L | GRM0335C1H9R6BD01D | GRM1555C1H9R6BA01D |
| | ±0.25pF(C) | GRM0225C1C9R6CD05L | GRM0335C1H9R6CD01D | GRM1555C1H9R6CA01D |
| | ±0.5pF(D) | GRM0225C1C9R6DD05L | GRM0335C1H9R6DD01D | GRM1555C1H9R6DA01D |
| 9.7pF(9R7) | ±0.05pF(W) | GRM0225C1C9R7WD05L | GRM0335C1H9R7WD01D | GRM1555C1H9R7WA01D |
| | ±0.1pF(B) | GRM0225C1C9R7BD05L | GRM0335C1H9R7BD01D | GRM1555C1H9R7BA01D |
| | ±0.25pF(C) | GRM0225C1C9R7CD05L | GRM0335C1H9R7CD01D | GRM1555C1H9R7CA01D |
| | ±0.5pF(D) | GRM0225C1C9R7DD05L | GRM0335C1H9R7DD01D | GRM1555C1H9R7DA01D |
| 9.8pF(9R8) | ±0.05pF(W) | GRM0225C1C9R8WD05L | GRM0335C1H9R8WD01D | GRM1555C1H9R8WA01D |
| | ±0.1pF(B) | GRM0225C1C9R8BD05L | GRM0335C1H9R8BD01D | GRM1555C1H9R8BA01D |
| | ±0.25pF(C) | GRM0225C1C9R8CD05L | GRM0335C1H9R8CD01D | GRM1555C1H9R8CA01D |
| | ±0.5pF(D) | GRM0225C1C9R8DD05L | GRM0335C1H9R8DD01D | GRM1555C1H9R8DA01D |
| 9.9pF(9R9) | ±0.05pF(W) | GRM0225C1C9R9WD05L | GRM0335C1H9R9WD01D | GRM1555C1H9R9WA01D |
| | ±0.1pF(B) | GRM0225C1C9R9BD05L | GRM0335C1H9R9BD01D | GRM1555C1H9R9BA01D |
| | ±0.25pF(C) | GRM0225C1C9R9CD05L | GRM0335C1H9R9CD01D | GRM1555C1H9R9CA01D |
| | ±0.5pF(D) | GRM0225C1C9R9DD05L | GRM0335C1H9R9DD01D | GRM1555C1H9R9DA01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) **GR** **M** **02** **2** **5C** **1C** **9R1** **W** **D05** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics ⑥ Rated Voltage
 ③ Dimension (LxW) ④ Dimension (T)
 ⑦ Capacitance
 ⑧ Capacitance Tolerance ⑨ Individual Specification Code ⑩ Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | | | 0.6x0.3(03)<0201> |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) | 50(1H) |
| Capacitance | Tolerance | Part Number | | | |
| 10pF(100) | ±2%(G) | GRM0225C1C100GD05L | | | GRM0335C1H100GD01D |
| | ±5%(J) | GRM0225C1C100JD05L | | | GRM0335C1H100JD01D |
| 12pF(120) | ±2%(G) | GRM0225C1C120GD05L | | | GRM0335C1H120GD01D |
| | ±5%(J) | GRM0225C1C120JD05L | | | GRM0335C1H120JD01D |
| 15pF(150) | ±2%(G) | GRM0225C1C150GD05L | | | GRM0335C1H150GD01D |
| | ±5%(J) | GRM0225C1C150JD05L | | | GRM0335C1H150JD01D |
| 18pF(180) | ±2%(G) | GRM0225C1C180GD05L | | | GRM0335C1H180GD01D |
| | ±5%(J) | GRM0225C1C180JD05L | | | GRM0335C1H180JD01D |
| 22pF(220) | ±2%(G) | GRM0225C1C220GD05L | | | GRM0335C1H220GD01D |
| | ±5%(J) | GRM0225C1C220JD05L | | | GRM0335C1H220JD01D |
| 27pF(270) | ±2%(G) | GRM0225C1C270GD05L | | | GRM0335C1H270GD01D |
| | ±5%(J) | GRM0225C1C270JD05L | | | GRM0335C1H270JD01D |
| 33pF(330) | ±2%(G) | GRM0225C1C330GD05L | | | GRM0335C1H330GD01D |
| | ±5%(J) | GRM0225C1C330JD05L | | | GRM0335C1H330JD01D |
| 39pF(390) | ±2%(G) | GRM0225C1C390GD05L | | | GRM0335C1H390GD01D |
| | ±5%(J) | GRM0225C1C390JD05L | | | GRM0335C1H390JD01D |
| 47pF(470) | ±2%(G) | GRM0225C1C470GD05L | | | GRM0335C1H470GD01D |
| | ±5%(J) | GRM0225C1C470JD05L | | | GRM0335C1H470JD01D |
| 56pF(560) | ±2%(G) | | GRM0225C1A560GD05L | GRM0225C0J560GD05L | GRM0335C1H560GD01D |
| | ±5%(J) | | GRM0225C1A560JD05L | GRM0225C0J560JD05L | GRM0335C1H560JD01D |
| 68pF(680) | ±2%(G) | | GRM0225C1A680GD05L | GRM0225C0J680GD05L | GRM0335C1H680GD01D |
| | ±5%(J) | | GRM0225C1A680JD05L | GRM0225C0J680JD05L | GRM0335C1H680JD01D |
| 82pF(820) | ±2%(G) | | GRM0225C1A820GD05L | GRM0225C0J820GD05L | GRM0335C1H820GD01D |
| | ±5%(J) | | GRM0225C1A820JD05L | GRM0225C0J820JD05L | GRM0335C1H820JD01D |
| 100pF(101) | ±2%(G) | | GRM0225C1A101GD05L | GRM0225C0J101GD05L | GRM0335C1H101GD01D |
| | ±5%(J) | | GRM0225C1A101JD05L | GRM0225C0J101JD05L | GRM0335C1H101JD01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

1

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|-----------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) |
| TC | | C0G(5C) |
| Capacitance | Tolerance | Part Number |
| 10pF(100) | ±2%(G) | GRM1555C1H100GA01D |
| | ±5%(J) | GRM1555C1H100JA01D |
| 12pF(120) | ±2%(G) | GRM1555C1H120GA01D |
| | ±5%(J) | GRM1555C1H120JA01D |
| 15pF(150) | ±2%(G) | GRM1555C1H150GA01D |
| | ±5%(J) | GRM1555C1H150JA01D |
| 18pF(180) | ±2%(G) | GRM1555C1H180GA01D |
| | ±5%(J) | GRM1555C1H180JA01D |
| 22pF(220) | ±2%(G) | GRM1555C1H220GA01D |
| | ±5%(J) | GRM1555C1H220JA01D |
| 27pF(270) | ±2%(G) | GRM1555C1H270GA01D |
| | ±5%(J) | GRM1555C1H270JA01D |
| 33pF(330) | ±2%(G) | GRM1555C1H330GA01D |
| | ±5%(J) | GRM1555C1H330JA01D |
| 39pF(390) | ±2%(G) | GRM1555C1H390GA01D |
| | ±5%(J) | GRM1555C1H390JA01D |
| 47pF(470) | ±2%(G) | GRM1555C1H470GA01D |
| | ±5%(J) | GRM1555C1H470JA01D |
| 56pF(560) | ±2%(G) | GRM1555C1H560GA01D |
| | ±5%(J) | GRM1555C1H560JA01D |
| 68pF(680) | ±2%(G) | GRM1555C1H680GA01D |
| | ±5%(J) | GRM1555C1H680JA01D |
| 82pF(820) | ±2%(G) | GRM1555C1H820GA01D |
| | ±5%(J) | GRM1555C1H820JA01D |
| 100pF(101) | ±2%(G) | GRM1555C1H101GA01D |
| | ±5%(J) | GRM1555C1H101JA01D |
| 120pF(121) | ±2%(G) | GRM1555C1H121GA01D |
| | ±5%(J) | GRM1555C1H121JA01D |
| 150pF(151) | ±2%(G) | GRM1555C1H151GA01D |
| | ±5%(J) | GRM1555C1H151JA01D |
| 180pF(181) | ±2%(G) | GRM1555C1H181GA01D |
| | ±5%(J) | GRM1555C1H181JA01D |
| 220pF(221) | ±2%(G) | GRM1555C1H221GA01D |
| | ±5%(J) | GRM1555C1H221JA01D |
| 270pF(271) | ±2%(G) | GRM1555C1H271GA01D |
| | ±5%(J) | GRM1555C1H271JA01D |
| 330pF(331) | ±2%(G) | GRM1555C1H331GA01D |
| | ±5%(J) | GRM1555C1H331JA01D |
| 390pF(391) | ±2%(G) | GRM1555C1H391GA01D |
| | ±5%(J) | GRM1555C1H391JA01D |
| 470pF(471) | ±2%(G) | GRM1555C1H471GA01D |
| | ±5%(J) | GRM1555C1H471JA01D |
| 560pF(561) | ±2%(G) | GRM1555C1H561GA01D |
| | ±5%(J) | GRM1555C1H561JA01D |
| 680pF(681) | ±2%(G) | GRM1555C1H681GA01D |
| | ±5%(J) | GRM1555C1H681JA01D |
| 820pF(821) | ±2%(G) | GRM1555C1H821GA01D |
| | ±5%(J) | GRM1555C1H821JA01D |
| 1000pF(102) | ±2%(G) | GRM1555C1H102GA01D |
| | ±5%(J) | GRM1555C1H102JA01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **15** **5** **5C** **1H** **100** **G** **Z01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID
 ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ④ Dimension (T)
 ⑥ Rated Voltage
 ⑦ Capacitance
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 10pF(100) | ±5%(J) | GRM1885C2A100JA01D | GRM1885C1H100JA01D |
| 12pF(120) | ±5%(J) | GRM1885C2A120JA01D | GRM1885C1H120JA01D |
| 15pF(150) | ±5%(J) | GRM1885C2A150JA01D | GRM1885C1H150JA01D |
| 18pF(180) | ±5%(J) | GRM1885C2A180JA01D | GRM1885C1H180JA01D |
| 22pF(220) | ±5%(J) | GRM1885C2A220JA01D | GRM1885C1H220JA01D |
| 27pF(270) | ±5%(J) | GRM1885C2A270JA01D | GRM1885C1H270JA01D |
| 33pF(330) | ±5%(J) | GRM1885C2A330JA01D | GRM1885C1H330JA01D |
| 39pF(390) | ±5%(J) | GRM1885C2A390JA01D | GRM1885C1H390JA01D |
| 47pF(470) | ±5%(J) | GRM1885C2A470JA01D | GRM1885C1H470JA01D |
| 56pF(560) | ±5%(J) | GRM1885C2A560JA01D | GRM1885C1H560JA01D |
| 68pF(680) | ±5%(J) | GRM1885C2A680JA01D | GRM1885C1H680JA01D |
| 82pF(820) | ±5%(J) | GRM1885C2A820JA01D | GRM1885C1H820JA01D |
| 100pF(101) | ±5%(J) | GRM1885C2A101JA01D | GRM1885C1H101JA01D |
| 120pF(121) | ±5%(J) | GRM1885C2A121JA01D | GRM1885C1H121JA01D |
| 150pF(151) | ±5%(J) | GRM1885C2A151JA01D | GRM1885C1H151JA01D |
| 180pF(181) | ±5%(J) | GRM1885C2A181JA01D | GRM1885C1H181JA01D |
| 220pF(221) | ±5%(J) | GRM1885C2A221JA01D | GRM1885C1H221JA01D |
| 270pF(271) | ±5%(J) | GRM1885C2A271JA01D | GRM1885C1H271JA01D |
| 330pF(331) | ±5%(J) | GRM1885C2A331JA01D | GRM1885C1H331JA01D |
| 390pF(391) | ±5%(J) | GRM1885C2A391JA01D | GRM1885C1H391JA01D |
| 470pF(471) | ±5%(J) | GRM1885C2A471JA01D | GRM1885C1H471JA01D |
| 560pF(561) | ±5%(J) | GRM1885C2A561JA01D | GRM1885C1H561JA01D |
| 680pF(681) | ±5%(J) | GRM1885C2A681JA01D | GRM1885C1H681JA01D |
| 820pF(821) | ±5%(J) | GRM1885C2A821JA01D | GRM1885C1H821JA01D |
| 1000pF(102) | ±5%(J) | GRM1885C2A102JA01D | GRM1885C1H102JA01D |
| 1200pF(122) | ±5%(J) | GRM1885C2A122JA01D | GRM1885C1H122JA01D |
| 1500pF(152) | ±5%(J) | GRM1885C2A152JA01D | GRM1885C1H152JA01D |
| 1800pF(182) | ±5%(J) | | GRM1885C1H182JA01D |
| 2200pF(222) | ±5%(J) | | GRM1885C1H222JA01D |
| 2700pF(272) | ±5%(J) | | GRM1885C1H272JA01D |
| 3300pF(332) | ±5%(J) | | GRM1885C1H332JA01D |
| 3900pF(392) | ±5%(J) | | GRM1885C1H392JA01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

1

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | | 3.2x1.6(31)<1206> | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | | |
| 100pF(101) | ±5%(J) | GRM2165C2A101JA01D | | | |
| 120pF(121) | ±5%(J) | GRM2165C2A121JA01D | | | |
| 150pF(151) | ±5%(J) | GRM2165C2A151JA01D | | | |
| 180pF(181) | ±5%(J) | GRM2165C2A181JA01D | | | |
| 220pF(221) | ±5%(J) | GRM2165C2A221JA01D | | | |
| 270pF(271) | ±5%(J) | GRM2165C2A271JA01D | | | |
| 330pF(331) | ±5%(J) | GRM2165C2A331JA01D | | | |
| 390pF(391) | ±5%(J) | GRM2165C2A391JA01D | | | |
| 470pF(471) | ±5%(J) | GRM2165C2A471JA01D | | | |
| 560pF(561) | ±5%(J) | GRM2165C2A561JA01D | | | |
| 680pF(681) | ±5%(J) | GRM2165C2A681JA01D | | | |
| 820pF(821) | ±5%(J) | GRM2165C2A821JA01D | | | |
| 1000pF(102) | ±5%(J) | GRM2165C2A102JA01D | | | |
| 1200pF(122) | ±5%(J) | GRM2165C2A122JA01D | GRM2165C1H122JA01D | | |
| 1500pF(152) | ±5%(J) | GRM2165C2A152JA01D | GRM2165C1H152JA01D | | |
| 1800pF(182) | ±5%(J) | GRM2165C2A182JA01D | GRM2165C1H182JA01D | GRM3195C2A182JA01D | |
| 2200pF(222) | ±5%(J) | GRM2165C2A222JA01D | GRM2165C1H222JA01D | GRM3195C2A222JA01D | |
| 2700pF(272) | ±5%(J) | GRM2165C2A272JA01D | GRM2165C1H272JA01D | GRM3195C2A272JA01D | |
| 3300pF(332) | ±5%(J) | GRM2165C2A332JA01D | GRM2165C1H332JA01D | GRM3195C2A332JA01D | |
| 3900pF(392) | ±5%(J) | | GRM2165C1H392JA01D | GRM3195C2A392JA01D | |
| 4700pF(472) | ±5%(J) | | GRM2165C1H472JA01D | GRM3195C2A472JA01D | GRM3195C1H472JA01D |
| 5600pF(562) | ±5%(J) | | GRM2195C1H562JA01D | GRM3195C2A562JA01D | GRM3195C1H562JA01D |
| 6800pF(682) | ±5%(J) | | GRM2195C1H682JA01D | GRM3195C2A682JA01D | GRM3195C1H682JA01D |
| 8200pF(822) | ±5%(J) | | GRM2195C1H822JA01D | GRM3195C2A822JA01D | GRM3195C1H822JA01D |
| 10000pF(103) | ±5%(J) | | GRM2195C1H103JA01D | GRM3195C2A103JA01D | GRM3195C1H103JA01D |
| 12000pF(123) | ±5%(J) | | GRM2195C1H123JA01D | | GRM3195C1H123JA01D |
| 15000pF(153) | ±5%(J) | | GRM2195C1H153JA01D | | GRM3195C1H153JA01D |
| 18000pF(183) | ±5%(J) | | GRM21B5C1H183JA01L | | GRM3195C1H183JA01D |
| 22000pF(223) | ±5%(J) | | GRM21B5C1H223JA01L | | GRM3195C1H223JA01D |
| 27000pF(273) | ±5%(J) | | | | GRM3195C1H273JA01D |
| 33000pF(333) | ±5%(J) | | | | GRM3195C1H333JA01D |
| 39000pF(393) | ±5%(J) | | | | GRM3195C1H393JA01D |
| 47000pF(473) | ±5%(J) | | | | GRM31M5C1H473JA01L |
| 56000pF(563) | ±5%(J) | | | | GRM31M5C1H563JA01L |
| 68000pF(683) | ±5%(J) | | | | GRM31C5C1H683JA01L |
| 82000pF(823) | ±5%(J) | | | | GRM31C5C1H823JA01L |
| 100000pF(104) | ±5%(J) | | | | GRM31C5C1H104JA01L |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) **GR** **M** **21** **6** **5C** **2A** **101** **J** **A01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics Low Profile

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) |
| Capacitance | Tolerance | Part Number |
| 0.1pF(R10) | ±0.1pF(B) | GRM1535C1HR10BDD5D |
| 0.2pF(R20) | ±0.1pF(B) | GRM1535C1HR20BDD5D |
| 0.3pF(R30) | ±0.1pF(B) | GRM1535C1HR30BDD5D |
| 0.4pF(R40) | ±0.1pF(B) | GRM1535C1HR40BDD5D |
| 0.5pF(R50) | ±0.1pF(B) | GRM1535C1HR50BDD5D |
| 0.6pF(R60) | ±0.1pF(B) | GRM1535C1HR60BDD5D |
| 0.7pF(R70) | ±0.1pF(B) | GRM1535C1HR70BDD5D |
| 0.8pF(R80) | ±0.1pF(B) | GRM1535C1HR80BDD5D |
| 0.9pF(R90) | ±0.1pF(B) | GRM1535C1HR90BDD5D |
| 1.0pF(1R0) | ±0.25pF(C) | GRM1535C1H1R0CDD5D |
| 1.1pF(1R1) | ±0.25pF(C) | GRM1535C1H1R1CDD5D |
| 1.2pF(1R2) | ±0.25pF(C) | GRM1535C1H1R2CDD5D |
| 1.3pF(1R3) | ±0.25pF(C) | GRM1535C1H1R3CDD5D |
| 1.4pF(1R4) | ±0.25pF(C) | GRM1535C1H1R4CDD5D |
| 1.5pF(1R5) | ±0.25pF(C) | GRM1535C1H1R5CDD5D |
| 1.6pF(1R6) | ±0.25pF(C) | GRM1535C1H1R6CDD5D |
| 1.7pF(1R7) | ±0.25pF(C) | GRM1535C1H1R7CDD5D |
| 1.8pF(1R8) | ±0.25pF(C) | GRM1535C1H1R8CDD5D |
| 1.9pF(1R9) | ±0.25pF(C) | GRM1535C1H1R9CDD5D |
| 2.0pF(2R0) | ±0.25pF(C) | GRM1535C1H2R0CDD5D |
| 2.1pF(2R1) | ±0.25pF(C) | GRM1535C1H2R1CDD5D |
| 2.2pF(2R2) | ±0.25pF(C) | GRM1535C1H2R2CDD5D |
| 2.3pF(2R3) | ±0.25pF(C) | GRM1535C1H2R3CDD5D |
| 2.4pF(2R4) | ±0.25pF(C) | GRM1535C1H2R4CDD5D |
| 2.5pF(2R5) | ±0.25pF(C) | GRM1535C1H2R5CDD5D |
| 2.6pF(2R6) | ±0.25pF(C) | GRM1535C1H2R6CDD5D |
| 2.7pF(2R7) | ±0.25pF(C) | GRM1535C1H2R7CDD5D |
| 2.8pF(2R8) | ±0.25pF(C) | GRM1535C1H2R8CDD5D |
| 2.9pF(2R9) | ±0.25pF(C) | GRM1535C1H2R9CDD5D |
| 3.0pF(3R0) | ±0.25pF(C) | GRM1535C1H3R0CDD5D |
| 3.1pF(3R1) | ±0.25pF(C) | GRM1535C1H3R1CDD5D |
| 3.2pF(3R2) | ±0.25pF(C) | GRM1535C1H3R2CDD5D |
| 3.3pF(3R3) | ±0.25pF(C) | GRM1535C1H3R3CDD5D |
| 3.4pF(3R4) | ±0.25pF(C) | GRM1535C1H3R4CDD5D |
| 3.5pF(3R5) | ±0.25pF(C) | GRM1535C1H3R5CDD5D |
| 3.6pF(3R6) | ±0.25pF(C) | GRM1535C1H3R6CDD5D |
| 3.7pF(3R7) | ±0.25pF(C) | GRM1535C1H3R7CDD5D |
| 3.8pF(3R8) | ±0.25pF(C) | GRM1535C1H3R8CDD5D |
| 3.9pF(3R9) | ±0.25pF(C) | GRM1535C1H3R9CDD5D |
| 4.0pF(4R0) | ±0.25pF(C) | GRM1535C1H4R0CDD5D |
| 4.1pF(4R1) | ±0.25pF(C) | GRM1535C1H4R1CDD5D |
| 4.2pF(4R2) | ±0.25pF(C) | GRM1535C1H4R2CDD5D |
| 4.3pF(4R3) | ±0.25pF(C) | GRM1535C1H4R3CDD5D |
| 4.4pF(4R4) | ±0.25pF(C) | GRM1535C1H4R4CDD5D |
| 4.5pF(4R5) | ±0.25pF(C) | GRM1535C1H4R5CDD5D |
| 4.6pF(4R6) | ±0.25pF(C) | GRM1535C1H4R6CDD5D |
| 4.7pF(4R7) | ±0.25pF(C) | GRM1535C1H4R7CDD5D |
| 4.8pF(4R8) | ±0.25pF(C) | GRM1535C1H4R8CDD5D |
| 4.9pF(4R9) | ±0.25pF(C) | GRM1535C1H4R9CDD5D |
| 5.0pF(5R0) | ±0.25pF(C) | GRM1535C1H5R0CDD5D |

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|-----------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) |
| Capacitance | Tolerance | Part Number |
| 5.1pF(5R1) | ±0.5pF(D) | GRM1535C1H5R1DDD5D |
| 5.2pF(5R2) | ±0.5pF(D) | GRM1535C1H5R2DDD5D |
| 5.3pF(5R3) | ±0.5pF(D) | GRM1535C1H5R3DDD5D |
| 5.4pF(5R4) | ±0.5pF(D) | GRM1535C1H5R4DDD5D |
| 5.5pF(5R5) | ±0.5pF(D) | GRM1535C1H5R5DDD5D |
| 5.6pF(5R6) | ±0.5pF(D) | GRM1535C1H5R6DDD5D |
| 5.7pF(5R7) | ±0.5pF(D) | GRM1535C1H5R7DDD5D |
| 5.8pF(5R8) | ±0.5pF(D) | GRM1535C1H5R8DDD5D |
| 5.9pF(5R9) | ±0.5pF(D) | GRM1535C1H5R9DDD5D |
| 6.0pF(6R0) | ±0.5pF(D) | GRM1535C1H6R0DDD5D |
| 6.1pF(6R1) | ±0.5pF(D) | GRM1535C1H6R1DDD5D |
| 6.2pF(6R2) | ±0.5pF(D) | GRM1535C1H6R2DDD5D |
| 6.3pF(6R3) | ±0.5pF(D) | GRM1535C1H6R3DDD5D |
| 6.4pF(6R4) | ±0.5pF(D) | GRM1535C1H6R4DDD5D |
| 6.5pF(6R5) | ±0.5pF(D) | GRM1535C1H6R5DDD5D |
| 6.6pF(6R6) | ±0.5pF(D) | GRM1535C1H6R6DDD5D |
| 6.7pF(6R7) | ±0.5pF(D) | GRM1535C1H6R7DDD5D |
| 6.8pF(6R8) | ±0.5pF(D) | GRM1535C1H6R8DDD5D |
| 6.9pF(6R9) | ±0.5pF(D) | GRM1535C1H6R9DDD5D |
| 7.0pF(7R0) | ±0.5pF(D) | GRM1535C1H7R0DDD5D |
| 7.1pF(7R1) | ±0.5pF(D) | GRM1535C1H7R1DDD5D |
| 7.2pF(7R2) | ±0.5pF(D) | GRM1535C1H7R2DDD5D |
| 7.3pF(7R3) | ±0.5pF(D) | GRM1535C1H7R3DDD5D |
| 7.4pF(7R4) | ±0.5pF(D) | GRM1535C1H7R4DDD5D |
| 7.5pF(7R5) | ±0.5pF(D) | GRM1535C1H7R5DDD5D |
| 7.6pF(7R6) | ±0.5pF(D) | GRM1535C1H7R6DDD5D |
| 7.7pF(7R7) | ±0.5pF(D) | GRM1535C1H7R7DDD5D |
| 7.8pF(7R8) | ±0.5pF(D) | GRM1535C1H7R8DDD5D |
| 7.9pF(7R9) | ±0.5pF(D) | GRM1535C1H7R9DDD5D |
| 8.0pF(8R0) | ±0.5pF(D) | GRM1535C1H8R0DDD5D |
| 8.1pF(8R1) | ±0.5pF(D) | GRM1535C1H8R1DDD5D |
| 8.2pF(8R2) | ±0.5pF(D) | GRM1535C1H8R2DDD5D |
| 8.3pF(8R3) | ±0.5pF(D) | GRM1535C1H8R3DDD5D |
| 8.4pF(8R4) | ±0.5pF(D) | GRM1535C1H8R4DDD5D |
| 8.5pF(8R5) | ±0.5pF(D) | GRM1535C1H8R5DDD5D |
| 8.6pF(8R6) | ±0.5pF(D) | GRM1535C1H8R6DDD5D |
| 8.7pF(8R7) | ±0.5pF(D) | GRM1535C1H8R7DDD5D |
| 8.8pF(8R8) | ±0.5pF(D) | GRM1535C1H8R8DDD5D |
| 8.9pF(8R9) | ±0.5pF(D) | GRM1535C1H8R9DDD5D |
| 9.0pF(9R0) | ±0.5pF(D) | GRM1535C1H9R0DDD5D |
| 9.1pF(9R1) | ±0.5pF(D) | GRM1535C1H9R1DDD5D |
| 9.2pF(9R2) | ±0.5pF(D) | GRM1535C1H9R2DDD5D |
| 9.3pF(9R3) | ±0.5pF(D) | GRM1535C1H9R3DDD5D |
| 9.4pF(9R4) | ±0.5pF(D) | GRM1535C1H9R4DDD5D |
| 9.5pF(9R5) | ±0.5pF(D) | GRM1535C1H9R5DDD5D |
| 9.6pF(9R6) | ±0.5pF(D) | GRM1535C1H9R6DDD5D |
| 9.7pF(9R7) | ±0.5pF(D) | GRM1535C1H9R7DDD5D |
| 9.8pF(9R8) | ±0.5pF(D) | GRM1535C1H9R8DDD5D |
| 9.9pF(9R9) | ±0.5pF(D) | GRM1535C1H9R9DDD5D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

1

Temperature Compensating Type C0G(5C) Characteristics Low Profile

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|-----------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) |
| Capacitance | Tolerance | Part Number |
| 10pF(100) | ±5%(J) | GRM1535C1H100JDD5D |
| 12pF(120) | ±5%(J) | GRM1535C1H120JDD5D |
| 15pF(150) | ±5%(J) | GRM1535C1H150JDD5D |
| 18pF(180) | ±5%(J) | GRM1535C1H180JDD5D |
| 22pF(220) | ±5%(J) | GRM1535C1H220JDD5D |
| 27pF(270) | ±5%(J) | GRM1535C1H270JDD5D |
| 33pF(330) | ±5%(J) | GRM1535C1H330JDD5D |
| 39pF(390) | ±5%(J) | GRM1535C1H390JDD5D |
| 47pF(470) | ±5%(J) | GRM1535C1H470JDD5D |
| 56pF(560) | ±5%(J) | GRM1535C1H560JDD5D |
| 68pF(680) | ±5%(J) | GRM1535C1H680JDD5D |
| 82pF(820) | ±5%(J) | GRM1535C1H820JDD5D |
| 100pF(101) | ±5%(J) | GRM1535C1H101JDD5D |
| 120pF(121) | ±5%(J) | GRM1535C1H121JDD5D |
| 150pF(151) | ±5%(J) | GRM1535C1H151JDD5D |
| 180pF(181) | ±5%(J) | GRM1535C1H181JDD5D |
| 220pF(221) | ±5%(J) | GRM1535C1H221JDD5D |
| 270pF(271) | ±5%(J) | GRM1535C1H271JDD5D |
| 330pF(331) | ±5%(J) | GRM1535C1H331JDD5D |
| 390pF(391) | ±5%(J) | GRM1535C1H391JDD5D |
| 470pF(471) | ±5%(J) | GRM1535C1H471JDD5D |
| 560pF(561) | ±5%(J) | GRM1535C1H561JDD5D |
| 680pF(681) | ±5%(J) | GRM1535C1H681JDD5D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **15** **3** **5C** **1H** **100** **J** **DD5** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑧ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics Low Profile

| LxW [mm] | | 2.0x1.25(21)<0805> | | 3.2x1.6(31)<1206> | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | | |
| 100pF(101) | ±5%(J) | GRM2165C2A101JA01D | | | |
| 120pF(121) | ±5%(J) | GRM2165C2A121JA01D | | | |
| 150pF(151) | ±5%(J) | GRM2165C2A151JA01D | | | |
| 180pF(181) | ±5%(J) | GRM2165C2A181JA01D | | | |
| 220pF(221) | ±5%(J) | GRM2165C2A221JA01D | | | |
| 270pF(271) | ±5%(J) | GRM2165C2A271JA01D | | | |
| 330pF(331) | ±5%(J) | GRM2165C2A331JA01D | | | |
| 390pF(391) | ±5%(J) | GRM2165C2A391JA01D | | | |
| 470pF(471) | ±5%(J) | GRM2165C2A471JA01D | | | |
| 560pF(561) | ±5%(J) | GRM2165C2A561JA01D | | | |
| 680pF(681) | ±5%(J) | GRM2165C2A681JA01D | | | |
| 820pF(821) | ±5%(J) | GRM2165C2A821JA01D | | | |
| 1000pF(102) | ±5%(J) | GRM2165C2A102JA01D | | | |
| 1200pF(122) | ±5%(J) | GRM2165C2A122JA01D | GRM2165C1H122JA01D | | |
| 1500pF(152) | ±5%(J) | GRM2165C2A152JA01D | GRM2165C1H152JA01D | | |
| 1800pF(182) | ±5%(J) | GRM2165C2A182JA01D | GRM2165C1H182JA01D | GRM3195C2A182JA01D | |
| 2200pF(222) | ±5%(J) | GRM2165C2A222JA01D | GRM2165C1H222JA01D | GRM3195C2A222JA01D | |
| 2700pF(272) | ±5%(J) | GRM2165C2A272JA01D | GRM2165C1H272JA01D | GRM3195C2A272JA01D | |
| 3300pF(332) | ±5%(J) | GRM2165C2A332JA01D | GRM2165C1H332JA01D | GRM3195C2A332JA01D | |
| 3900pF(392) | ±5%(J) | | GRM2165C1H392JA01D | GRM3195C2A392JA01D | |
| 4700pF(472) | ±5%(J) | | GRM2165C1H472JA01D | GRM3195C2A472JA01D | GRM3195C1H472JA01D |
| 5600pF(562) | ±5%(J) | | GRM2195C1H562JA01D | GRM3195C2A562JA01D | GRM3195C1H562JA01D |
| 6800pF(682) | ±5%(J) | | GRM2195C1H682JA01D | GRM3195C2A682JA01D | GRM3195C1H682JA01D |
| 8200pF(822) | ±5%(J) | | GRM2195C1H822JA01D | GRM3195C2A822JA01D | GRM3195C1H822JA01D |
| 10000pF(103) | ±5%(J) | | GRM2195C1H103JA01D | GRM3195C2A103JA01D | GRM3195C1H103JA01D |
| 12000pF(123) | ±5%(J) | | GRM2195C1H123JA01D | | GRM3195C1H123JA01D |
| 15000pF(153) | ±5%(J) | | GRM2195C1H153JA01D | | GRM3195C1H153JA01D |
| 18000pF(183) | ±5%(J) | | | | GRM3195C1H183JA01D |
| 22000pF(223) | ±5%(J) | | | | GRM3195C1H223JA01D |
| 27000pF(273) | ±5%(J) | | | | GRM3195C1H273JA01D |
| 33000pF(333) | ±5%(J) | | | | GRM3195C1H333JA01D |
| 39000pF(393) | ±5%(J) | | | | GRM3195C1H393JA01D |
| 47000pF(473) | ±5%(J) | | | | GRM31M5C1H473JA01L |
| 56000pF(563) | ±5%(J) | | | | GRM31M5C1H563JA01L |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Temperature Compensating Type U2J(7U) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 10(1A) |
| Capacitance | Tolerance | Part Number | |
| 1000pF(102) | ±5%(J) | GRM1887U1H102JA01D | |
| 1200pF(122) | ±5%(J) | GRM1887U1H122JA01D | |
| 1500pF(152) | ±5%(J) | GRM1887U1H152JA01D | |
| 1800pF(182) | ±5%(J) | GRM1887U1H182JA01D | |
| 2200pF(222) | ±5%(J) | GRM1887U1H222JA01D | |
| 2700pF(272) | ±5%(J) | GRM1887U1H272JA01D | |
| 3300pF(332) | ±5%(J) | GRM1887U1H332JA01D | |
| 3900pF(392) | ±5%(J) | GRM1887U1H392JA01D | |
| 4700pF(472) | ±5%(J) | GRM1887U1H472JA01D | |
| 5600pF(562) | ±5%(J) | GRM1887U1H562JA01D | |
| 6800pF(682) | ±5%(J) | GRM1887U1H682JA01D | |
| 8200pF(822) | ±5%(J) | GRM1887U1H822JA01D | |
| 10000pF(103) | ±5%(J) | GRM1887U1H103JA01D | |
| 12000pF(123) | ±5%(J) | | GRM1887U1A123JA01D |
| 15000pF(153) | ±5%(J) | | GRM1887U1A153JA01D |
| 18000pF(183) | ±5%(J) | | GRM1887U1A183JA01D |
| 22000pF(223) | ±5%(J) | | GRM1887U1A223JA01D |

| LxW [mm] | | 2.0x1.25(21)<0805> | | 3.2x1.6(31)<1206> |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 10(1A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 10000pF(103) | ±5%(J) | GRM2167U1H103JA01D | | |
| 12000pF(123) | ±5%(J) | GRM2167U1H123JA01D | | |
| 15000pF(153) | ±5%(J) | GRM2167U1H153JA01D | | |
| 18000pF(183) | ±5%(J) | GRM2167U1H183JA01D | | |
| 22000pF(223) | ±5%(J) | GRM2197U1H223JA01D | | |
| 27000pF(273) | ±5%(J) | GRM2197U1H273JA01D | | |
| 33000pF(333) | ±5%(J) | GRM21A7U1H333JA39L | | |
| 39000pF(393) | ±5%(J) | GRM21B7U1H393JA01L | | |
| 47000pF(473) | ±5%(J) | GRM21B7U1H473JA01L | | |
| 56000pF(563) | ±5%(J) | | GRM2197U1A563JA01D | GRM3197U1H563JA01D |
| 68000pF(683) | ±5%(J) | | GRM21B7U1A683JA01L | GRM31M7U1H683JA01L |
| 82000pF(823) | ±5%(J) | | GRM21B7U1A823JA01L | GRM31M7U1H823JA01L |
| 100000pF(104) | ±5%(J) | | GRM21B7U1A104JA01L | GRM31M7U1H104JA01L |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

1

Temperature Compensating Type U2J(7U) Characteristics Low Profile

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|--------------------|--------|
| Rated Volt. [Vdc] | | 50(1H) | 10(1A) |
| Capacitance | Tolerance | Part Number | |
| 2200pF(222) | ±5%(J) | GRM1857U1H222JA44D | |
| 2700pF(272) | ±5%(J) | GRM1857U1H272JA44D | |
| 3300pF(332) | ±5%(J) | GRM1857U1H332JA44D | |
| 3900pF(392) | ±5%(J) | GRM1857U1H392JA44D | |
| 4700pF(472) | ±5%(J) | GRM1857U1H472JA44D | |
| 5600pF(562) | ±5%(J) | GRM1857U1A562JA44D | |
| 6800pF(682) | ±5%(J) | GRM1857U1A682JA44D | |
| 8200pF(822) | ±5%(J) | GRM1857U1A822JA44D | |
| 10000pF(103) | ±5%(J) | GRM1857U1A103JA44D | |

| LxW [mm] | | 2.0x1.25(21)<0805> | | 3.2x1.6(31)<1206> |
|-------------------|-----------|--------------------|--------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 10(1A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 10000pF(103) | ±5%(J) | GRM2167U1H103JA01D | | |
| 12000pF(123) | ±5%(J) | GRM2167U1H123JA01D | | |
| 15000pF(153) | ±5%(J) | GRM2167U1H153JA01D | | |
| 18000pF(183) | ±5%(J) | GRM2167U1H183JA01D | | |
| 22000pF(223) | ±5%(J) | GRM2197U1H223JA01D | | |
| 27000pF(273) | ±5%(J) | GRM2197U1H273JA01D | | |
| 33000pF(333) | ±5%(J) | GRM21A7U1H333JA39L | | |
| 56000pF(563) | ±5%(J) | GRM2197U1A563JA01D | | GRM3197U1H563JA01D |
| 68000pF(683) | ±5%(J) | GRM31M7U1H683JA01L | | |
| 82000pF(823) | ±5%(J) | GRM31M7U1H823JA01L | | |
| 100000pF(104) | ±5%(J) | GRM31M7U1H104JA01L | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **18** **5** **7U** **1H** **222** **J** **A44** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type P2H(6P) Characteristics

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) |
| Capacitance | Tolerance | |
| 1.0pF(1R0) | ±0.25pF(C) | GRM1556P1H1R0CZ01D |
| 2.0pF(2R0) | ±0.25pF(C) | GRM1556P1H2R0CZ01D |
| 3.0pF(3R0) | ±0.25pF(C) | GRM1556P1H3R0CZ01D |
| 4.0pF(4R0) | ±0.25pF(C) | GRM1556P1H4R0CZ01D |
| 5.0pF(5R0) | ±0.25pF(C) | GRM1556P1H5R0CZ01D |
| 6.0pF(6R0) | ±0.5pF(D) | GRM1556P1H6R0DZ01D |
| 7.0pF(7R0) | ±0.5pF(D) | GRM1556P1H7R0DZ01D |
| 8.0pF(8R0) | ±0.5pF(D) | GRM1556P1H8R0DZ01D |
| 9.0pF(9R0) | ±0.5pF(D) | GRM1556P1H9R0DZ01D |
| 10pF(100) | ±5%(J) | GRM1556P1H100JZ01D |
| 12pF(120) | ±5%(J) | GRM1556P1H120JZ01D |
| 15pF(150) | ±5%(J) | GRM1556P1H150JZ01D |
| 18pF(180) | ±5%(J) | GRM1556P1H180JZ01D |
| 22pF(220) | ±5%(J) | GRM1556P1H220JZ01D |
| 27pF(270) | ±5%(J) | GRM1556P1H270JZ01D |

The part number code is shown in () and Unit is shown in [. <->: EIA [inch] Code

Temperature Compensating Type R2H(6R) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 1.0pF(1R0) | ±0.25pF(C) | GRM0336R1E1R0CD01D | GRM1556R1H1R0CD01D |
| 2.0pF(2R0) | ±0.25pF(C) | GRM0336R1E2R0CD01D | GRM1556R1H2R0CZ01D |
| 3.0pF(3R0) | ±0.25pF(C) | GRM0336R1E3R0CD01D | GRM1556R1H3R0CZ01D |
| 4.0pF(4R0) | ±0.25pF(C) | GRM0336R1E4R0CD01D | GRM1556R1H4R0CZ01D |
| 5.0pF(5R0) | ±0.25pF(C) | GRM0336R1E5R0CD01D | GRM1556R1H5R0CZ01D |
| 6.0pF(6R0) | ±0.5pF(D) | GRM0336R1E6R0DD01D | GRM1556R1H6R0DZ01D |
| 7.0pF(7R0) | ±0.5pF(D) | GRM0336R1E7R0DD01D | GRM1556R1H7R0DZ01D |
| 8.0pF(8R0) | ±0.5pF(D) | GRM0336R1E8R0DD01D | GRM1556R1H8R0DZ01D |
| 9.0pF(9R0) | ±0.5pF(D) | GRM0336R1E9R0DD01D | GRM1556R1H9R0DZ01D |
| 10pF(100) | ±5%(J) | GRM0336R1E100JD01D | GRM1556R1H100JZ01D |
| 12pF(120) | ±5%(J) | GRM0336R1E120JD01D | GRM1556R1H120JZ01D |
| 15pF(150) | ±5%(J) | GRM0336R1E150JD01D | GRM1556R1H150JZ01D |
| 18pF(180) | ±5%(J) | GRM0336R1E180JD01D | GRM1556R1H180JZ01D |
| 22pF(220) | ±5%(J) | GRM0336R1E220JD01D | GRM1556R1H220JZ01D |
| 27pF(270) | ±5%(J) | GRM0336R1E270JD01D | GRM1556R1H270JZ01D |
| 33pF(330) | ±5%(J) | GRM0336R1E330JD01D | GRM1556R1H330JZ01D |
| 39pF(390) | ±5%(J) | GRM0336R1E390JD01D | |
| 47pF(470) | ±5%(J) | GRM0336R1E470JD01D | |
| 56pF(560) | ±5%(J) | GRM0336R1E560JD01D | |
| 68pF(680) | ±5%(J) | GRM0336R1E680JD01D | |
| 82pF(820) | ±5%(J) | GRM0336R1E820JD01D | |
| 100pF(101) | ±5%(J) | GRM0336R1E101JD01D | |

The part number code is shown in () and Unit is shown in [. <->: EIA [inch] Code

1

Temperature Compensating Type S2H(6S) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 1.0pF(1R0) | ±0.25pF(C) | GRM0336S1E1R0CD01D | GRM1556S1H1R0CD01D |
| 2.0pF(2R0) | ±0.25pF(C) | GRM0336S1E2R0CD01D | GRM1556S1H2R0CD01D |
| 3.0pF(3R0) | ±0.25pF(C) | GRM0336S1E3R0CD01D | GRM1556S1H3R0CD01D |
| 4.0pF(4R0) | ±0.25pF(C) | GRM0336S1E4R0CD01D | GRM1556S1H4R0CD01D |
| 5.0pF(5R0) | ±0.25pF(C) | GRM0336S1E5R0CD01D | GRM1556S1H5R0CD01D |
| 6.0pF(6R0) | ±0.5pF(D) | GRM0336S1E6R0DD01D | GRM1556S1H6R0DD01D |
| 7.0pF(7R0) | ±0.5pF(D) | GRM0336S1E7R0DD01D | GRM1556S1H7R0DD01D |
| 8.0pF(8R0) | ±0.5pF(D) | GRM0336S1E8R0DD01D | GRM1556S1H8R0DD01D |
| 9.0pF(9R0) | ±0.5pF(D) | GRM0336S1E9R0DD01D | GRM1556S1H9R0DD01D |
| 10pF(100) | ±5%(J) | GRM0336S1E100JD01D | GRM1556S1H100JZ01D |
| 12pF(120) | ±5%(J) | GRM0336S1E120JD01D | GRM1556S1H120JZ01D |
| 15pF(150) | ±5%(J) | GRM0336S1E150JD01D | GRM1556S1H150JZ01D |
| 18pF(180) | ±5%(J) | GRM0336S1E180JD01D | GRM1556S1H180JZ01D |
| 22pF(220) | ±5%(J) | GRM0336S1E220JD01D | GRM1556S1H220JZ01D |
| 27pF(270) | ±5%(J) | GRM0336S1E270JD01D | GRM1556S1H270JZ01D |
| 33pF(330) | ±5%(J) | GRM0336S1E330JD01D | GRM1556S1H330JZ01D |
| 39pF(390) | ±5%(J) | GRM0336S1E390JD01D | GRM1556S1H390JZ01D |
| 47pF(470) | ±5%(J) | GRM0336S1E470JD01D | |
| 56pF(560) | ±5%(J) | GRM0336S1E560JD01D | |
| 68pF(680) | ±5%(J) | GRM0336S1E680JD01D | |
| 82pF(820) | ±5%(J) | GRM0336S1E820JD01D | |
| 100pF(101) | ±5%(J) | GRM0336S1E101JD01D | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GR** **M** **03** **3** **6S** **1E** **1R0** **C** **D01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type T2H(6T) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 1.0pF(1R0) | ±0.25pF(C) | GRM0336T1E1R0CD01D | GRM1556T1H1R0CD01D |
| 2.0pF(2R0) | ±0.25pF(C) | GRM0336T1E2R0CD01D | GRM1556T1H2R0CD01D |
| 3.0pF(3R0) | ±0.25pF(C) | GRM0336T1E3R0CD01D | GRM1556T1H3R0CD01D |
| 4.0pF(4R0) | ±0.25pF(C) | GRM0336T1E4R0CD01D | GRM1556T1H4R0CD01D |
| 5.0pF(5R0) | ±0.25pF(C) | GRM0336T1E5R0CD01D | GRM1556T1H5R0CD01D |
| 6.0pF(6R0) | ±0.5pF(D) | GRM0336T1E6R0DD01D | GRM1556T1H6R0DD01D |
| 7.0pF(7R0) | ±0.5pF(D) | GRM0336T1E7R0DD01D | GRM1556T1H7R0DD01D |
| 8.0pF(8R0) | ±0.5pF(D) | GRM0336T1E8R0DD01D | GRM1556T1H8R0DD01D |
| 9.0pF(9R0) | ±0.5pF(D) | GRM0336T1E9R0DD01D | GRM1556T1H9R0DD01D |
| 10pF(100) | ±5%(J) | GRM0336T1E100JD01D | GRM1556T1H100JD01D |
| 12pF(120) | ±5%(J) | GRM0336T1E120JD01D | GRM1556T1H120JD01D |
| 15pF(150) | ±5%(J) | GRM0336T1E150JD01D | GRM1556T1H150JD01D |
| 18pF(180) | ±5%(J) | GRM0336T1E180JD01D | GRM1556T1H180JD01D |
| 22pF(220) | ±5%(J) | GRM0336T1E220JD01D | GRM1556T1H220JD01D |
| 27pF(270) | ±5%(J) | GRM0336T1E270JD01D | GRM1556T1H270JD01D |
| 33pF(330) | ±5%(J) | GRM0336T1E330JD01D | GRM1556T1H330JD01D |
| 39pF(390) | ±5%(J) | GRM0336T1E390JD01D | GRM1556T1H390JD01D |
| 47pF(470) | ±5%(J) | GRM0336T1E470JD01D | GRM1556T1H470JD01D |
| 56pF(560) | ±5%(J) | GRM0336T1E560JD01D | GRM1556T1H560JD01D |
| 68pF(680) | ±5%(J) | GRM0336T1E680JD01D | GRM1556T1H680JD01D |
| 82pF(820) | ±5%(J) | GRM0336T1E820JD01D | GRM1556T1H820JD01D |
| 100pF(101) | ±5%(J) | GRM0336T1E101JD01D | GRM1556T1H101JD01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

1

High Dielectric Constant Type X7R(R7) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> |
|-------------------|-----------|--------------------|
| Rated Volt. [Vdc] | | 10(1A) |
| Capacitance | Tolerance | Part Number |
| 68pF(680) | ±10%(K) | GRM022R71A680KA01L |
| 100pF(101) | ±10%(K) | GRM022R71A101KA01L |
| 150pF(151) | ±10%(K) | GRM022R71A151KA01L |
| 220pF(221) | ±10%(K) | GRM022R71A221KA01L |
| 330pF(331) | ±10%(K) | GRM022R71A331KA01L |
| 470pF(471) | ±10%(K) | GRM022R71A471KA01L |

| LxW [mm] | | 0.6x0.3(03)<0201> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | |
| 100pF(101) | ±10%(K) | GRM033R71E101KA01D | | |
| 150pF(151) | ±10%(K) | GRM033R71E151KA01D | | |
| 220pF(221) | ±10%(K) | GRM033R71E221KA01D | | |
| 330pF(331) | ±10%(K) | GRM033R71E331KA01D | | |
| 470pF(471) | ±10%(K) | GRM033R71E471KA01D | | |
| 680pF(681) | ±10%(K) | GRM033R71E681KA01D | | |
| 1000pF(102) | ±10%(K) | GRM033R71E102KA01D | | |
| 1500pF(152) | ±10%(K) | GRM033R71E152KA01D | | |
| 2200pF(222) | ±10%(K) | | GRM033R71C222KA88D | |
| 3300pF(332) | ±10%(K) | | GRM033R71C332KA88D | |
| 4700pF(472) | ±10%(K) | | | GRM033R71A472KA01D |
| 6800pF(682) | ±10%(K) | | | GRM033R71A682KA01D |
| 10000pF(103) | ±10%(K) | | | GRM033R71A103KA01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) **GR** **M** **02** **2** **R7** **1A** **680** **K** **A01** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

High Dielectric Constant Type X7R(R7) Characteristics

| LxW [mm] | | 1.0x0.5(15)<0402> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 220pF(221) | ±10%(K) | GRM155R72A221KA01D | GRM155R71H221KA01D | | |
| 330pF(331) | ±10%(K) | GRM155R72A331KA01D | GRM155R71H331KA01D | | |
| 470pF(471) | ±10%(K) | GRM155R72A471KA01D | GRM155R71H471KA01D | | |
| 680pF(681) | ±10%(K) | GRM155R72A681KA01D | GRM155R71H681KA01D | | |
| 1000pF(102) | ±10%(K) | GRM155R72A102KA01D | GRM155R71H102KA01D | | |
| 1500pF(152) | ±10%(K) | GRM155R72A152KA01D | GRM155R71H152KA01D | | |
| 2200pF(222) | ±10%(K) | GRM155R72A222KA01D | GRM155R71H222KA01D | | |
| 3300pF(332) | ±10%(K) | GRM155R72A332KA01D | GRM155R71H332KA01D | | |
| 4700pF(472) | ±10%(K) | GRM155R72A472KA01D | GRM155R71H472KA01D | GRM155R71E472KA01D | |
| 6800pF(682) | ±10%(K) | | GRM155R71H682KA88D | GRM155R71E682KA01D | |
| 10000pF(103) | ±10%(K) | | GRM155R71H103KA88D | GRM155R71E103KA01D | |
| 15000pF(153) | ±10%(K) | | GRM155R71H153KA12D | GRM155R71E153KA61D | GRM155R71C153KA01D |
| 22000pF(223) | ±10%(K) | | GRM155R71H223KA12D | GRM155R71E223KA61D | GRM155R71C223KA01D |
| 33000pF(333) | ±10%(K) | | | GRM155R71E333KA88D | GRM155R71C333KA01D |
| 47000pF(473) | ±10%(K) | | | GRM155R71E473KA88D | GRM155R71C473KA01D |
| 68000pF(683) | ±10%(K) | | | | GRM155R71C683KA88D |
| 0.10μF(104) | ±10%(K) | | | | GRM155R71C104KA88D |

| LxW [mm] | | 1.0x0.5(15)<0402> |
|-------------------|-----------|--------------------|
| Rated Volt. [Vdc] | | 10(1A) |
| Capacitance | Tolerance | Part Number |
| 68000pF(683) | ±10%(K) | GRM155R71A683KA01D |
| 0.10μF(104) | ±10%(K) | GRM155R71A104KA01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

1

High Dielectric Constant Type X7R(R7)/X7S(C7) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | | | |
|-------------------|-----------|--------------------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 220pF(221) | ±10%(K) | GRM188R72A221KA01D | GRM188R71H221KA01D | | |
| 330pF(331) | ±10%(K) | GRM188R72A331KA01D | GRM188R71H331KA01D | | |
| 470pF(471) | ±10%(K) | GRM188R72A471KA01D | GRM188R71H471KA01D | | |
| 680pF(681) | ±10%(K) | GRM188R72A681KA01D | GRM188R71H681KA01D | | |
| 1000pF(102) | ±10%(K) | GRM188R72A102KA01D | GRM188R71H102KA01D | | |
| 1500pF(152) | ±10%(K) | GRM188R72A152KA01D | GRM188R71H152KA01D | | |
| 2200pF(222) | ±10%(K) | GRM188R72A222KA01D | GRM188R71H222KA01D | | |
| 3300pF(332) | ±10%(K) | GRM188R72A332KA01D | GRM188R71H332KA01D | | |
| 4700pF(472) | ±10%(K) | GRM188R72A472KA01D | GRM188R71H472KA01D | | |
| 6800pF(682) | ±10%(K) | GRM188R72A682KA01D | GRM188R71H682KA01D | | |
| 10000pF(103) | ±10%(K) | GRM188R72A103KA01D | GRM188R71H103KA01D | GRM188R71E103KA01D | |
| 15000pF(153) | ±10%(K) | | GRM188R71H153KA01D | GRM188R71E153KA01D | |
| 22000pF(223) | ±10%(K) | | GRM188R71H223KA01D | GRM188R71E223KA01D | |
| 33000pF(333) | ±10%(K) | | GRM188R71H333KA61D | GRM188R71E333KA01D | |
| 47000pF(473) | ±10%(K) | | GRM188R71H473KA61D | GRM188R71E473KA01D | |
| 68000pF(683) | ±10%(K) | | GRM188R71H683KA93D | GRM188R71E683KA01D | |
| 0.10μF(104) | ±10%(K) | GRM188R72A104KA35D | GRM188R71H104KA93D | GRM188R71E104KA01D | |
| 0.15μF(154) | ±10%(K) | | | GRM188R71E154KA01D | GRM188R71C154KA01D |
| 0.22μF(224) | ±10%(K) | | | GRM188R71E224KA88D | GRM188R71C224KA01D |
| 0.33μF(334) | ±10%(K) | | | | GRM188R71C334KA01D |
| 0.47μF(474) | ±10%(K) | | | GRM188R71E474KA12D* | GRM188R71C474KA88D |
| 1.0μF(105) | ±10%(K) | | | GRM188R71E105KA12D* | GRM188R71C105KA12D* |

| LxW [mm] | | 1.6x0.8(18)<0603> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 0.33μF(334) | ±10%(K) | GRM188R71A334KA61D | | |
| 0.47μF(474) | ±10%(K) | GRM188R71A474KA61D | | |
| 0.68μF(684) | ±10%(K) | GRM188R71A684KA61D | | |
| 1.0μF(105) | ±10%(K) | GRM188R71A105KA61D* | | |
| 2.2μF(225) | ±10%(K) | GRM188R71A225KE15D* | GRM188C70J225KE20D* | GRM188C70G225KE20D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR** **M** **18** **8** **R7** **2A** **221** **K** **A01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X7R(R7)/X7U(E7) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 6800pF(682) | ±10%(K) | GRM219R72A682KA01D | | | |
| 10000pF(103) | ±10%(K) | GRM21BR72A103KA01L | | | |
| 15000pF(153) | ±10%(K) | GRM21BR72A153KA01L | | | |
| 22000pF(223) | ±10%(K) | GRM21BR72A223KA01L | | | |
| 33000pF(333) | ±10%(K) | GRM21BR72A333KA01L | GRM219R71H333KA01D | | |
| 47000pF(473) | ±10%(K) | GRM21BR72A473KA01L | GRM21BR71H473KA01L | | |
| 68000pF(683) | ±10%(K) | | GRM21BR71H683KA01L | GRM219R71E683KA01D | |
| 0.10μF(104) | ±10%(K) | | GRM21BR71H104KA01L | GRM21BR71E104KA01L | |
| 0.15μF(154) | ±10%(K) | | GRM21BR71H154KA01L | GRM21BR71E154KA01L | |
| 0.22μF(224) | ±10%(K) | GRM21AR72A224KAC5L | GRM21BR71H224KA01L | GRM21BR71E224KA01L | |
| 0.33μF(334) | ±10%(K) | GRM21AR72A334KAC5L | GRM219R71H334KA88D | GRM21BR71E334KA01L | |
| 0.47μF(474) | ±10%(K) | GRM21BR72A474KA73L | GRM21BR71H474KA88L | GRM219R71E474KA88D | |
| 0.68μF(684) | ±10%(K) | | | GRM219R71E684KA88D | GRM219R71C684KA01D |
| 1.0μF(105) | ±10%(K) | | GRM21BR71H105KA12L | GRM21BR71E105KA99L | GRM21BR71C105KA01L |
| | | | | GRM219R71E105KA88D | |
| 2.2μF(225) | ±10%(K) | | | GRM21BR71E225KA73L* | GRM21BR71C225KA12L |
| 4.7μF(475) | ±10%(K) | | | | GRM21BR71C475KA73L* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 2.2μF(225) | ±10%(K) | GRM21BR71A225KA01L | | |
| 4.7μF(475) | ±10%(K) | GRM21BR71A475KA73L* | | |
| 10μF(106) | ±10%(K) | GRM21BR71A106KE51L* | GRM21BR70J106KE76L* | |
| 22μF(226) | ±20%(M) | | | GRM21BE70G226ME51L* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GRM Series Specifications and Test Method(2).

1

High Dielectric Constant Type X7R(R7)/X7U(E7) Characteristics

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|-------------------|-----------|--------------------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 15000pF(153) | ±10%(K) | GRM319R72A153KA01L | | | |
| 22000pF(223) | ±10%(K) | GRM31MR72A223KA01L | | | |
| 33000pF(333) | ±10%(K) | GRM31MR72A333KA01L | | | |
| 47000pF(473) | ±10%(K) | GRM31MR72A473KA01L | | | |
| 68000pF(683) | ±10%(K) | GRM31MR72A683KA01L | | | |
| 0.10μF(104) | ±10%(K) | GRM319R72A104KA01D | | | |
| 0.15μF(154) | ±10%(K) | GRM31MR72A154KA01L | GRM31MR71H154KA01L | | |
| 0.22μF(224) | ±10%(K) | GRM31MR72A224KA01L | GRM31MR71H224KA01L | | |
| 0.33μF(334) | ±10%(K) | | GRM319R71H334KA01D | | |
| 0.47μF(474) | ±10%(K) | GRM31MR72A474KA35L | GRM31MR71H474KA01L | | |
| 0.68μF(684) | ±10%(K) | GRM31MR72A684KA35L | GRM31MR71H684KA88L | | |
| 1.0μF(105) | ±10%(K) | GRM31CR72A105KA01L | GRM31MR71H105KA88L | | |
| 2.2μF(225) | ±10%(K) | | GRM31CR71H225KA88L | GRM31MR71E225KA93L | GRM31MR71C225KA35L |
| 4.7μF(475) | ±10%(K) | | GRM31CR71H475KA12L | GRM31CR71E475KA88L | GRM31CR71C475KA01L |
| 10μF(106) | ±10%(K) | | | GRM31CR71E106KA12L* | GRM31CR71C106KAC7L* |

| LxW [mm] | | 3.2x1.6(31)<1206> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 10μF(106) | ±10%(K) | GRM31CR71A106KA01L | | |
| 22μF(226) | ±20%(M) | GRM31CR71A226ME15L* | GRM31CR70J226ME19L* | |
| 47μF(476) | ±20%(M) | | | GRM31CE70G476ME15L* |

| LxW [mm] | | 3.2x2.5(32)<1210> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 35(YA) | 25(1E) |
| Capacitance | Tolerance | Part Number | | | |
| 0.68μF(684) | ±10%(K) | GRM32CR72A684KA01L | GRM32NR71H684KA01L | | |
| 1.0μF(105) | ±10%(K) | GRM32CR72A105KA35L | | | |
| 2.2μF(225) | ±10%(K) | GRM32ER72A225KA35L | | | |
| 4.7μF(475) | ±10%(K) | | GRM32ER71H475KA88L | | |
| 10μF(106) | ±10%(K) | | | GRM32ER7YA106KA12L | GRM32DR71E106KA12L |
| 22μF(226) | ±20%(M) | | | | GRM32ER71E226ME15L* |

| LxW [mm] | | 3.2x2.5(32)<1210> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 22μF(226) | ±20%(M) | GRM32ER71C226ME18L* | | |
| 47μF(476) | ±20%(M) | | GRM32ER71A476ME15L* | GRM32ER70J476ME20L* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR** **M** **31** **9** **R7** **2A** **153** **K** **A01** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X7R(R7)/X7T(D7) Characteristics Low Profile

| LxW [mm] | | 1.0x0.5(15)<0402> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | |
| 220pF(221) | ±10%(K) | GRM15XR71H221KA86D | | |
| 330pF(331) | ±10%(K) | GRM15XR71H331KA86D | | |
| 470pF(471) | ±10%(K) | GRM15XR71H471KA86D | | |
| 680pF(681) | ±10%(K) | GRM15XR71H681KA86D | | |
| 1000pF(102) | ±10%(K) | GRM15XR71H102KA86D | | |
| 1500pF(152) | ±10%(K) | GRM15XR71H152KA86D | | |
| 2200pF(222) | ±10%(K) | | GRM15XR71E222KA86D | |
| 3300pF(332) | ±10%(K) | | | GRM15XR71C332KA86D |
| 4700pF(472) | ±10%(K) | | | GRM15XR71C472KA86D |
| 6800pF(682) | ±10%(K) | | | GRM15XR71C682KA86D |
| 10000pF(103) | ±10%(K) | | | GRM15XR71C103KA86D |

| LxW [mm] | | 1.6x0.8(18)<0603> |
|-------------------|-----------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) |
| Capacitance | Tolerance | Part Number |
| 1.0μF(105) | ±10%(K) | GRM185D71A105KE36D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 6800pF(682) | ±10%(K) | GRM219R72A682KA01D | | | |
| 33000pF(333) | ±10%(K) | | GRM219R71H333KA01D | | |
| 68000pF(683) | ±10%(K) | | | GRM219R71E683KA01D | |
| 0.22μF(224) | ±10%(K) | GRM21AR72A224KAC5L | | | |
| 0.33μF(334) | ±10%(K) | GRM21AR72A334KAC5L | GRM219R71H334KA88D | | |
| 0.47μF(474) | ±10%(K) | | | GRM219R71E474KA88D | |
| 0.68μF(684) | ±10%(K) | | | GRM219R71E684KA88D | GRM219R71C684KA01D |
| 1.0μF(105) | ±10%(K) | | | GRM219R71E105KA88D | |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code
 *: Please refer to GRM Series Specifications and Test Method(2).

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 15000pF(153) | ±10%(K) | GRM319R72A153KA01L | | | |
| 22000pF(223) | ±10%(K) | GRM31MR72A223KA01L | | | |
| 33000pF(333) | ±10%(K) | GRM31MR72A333KA01L | | | |
| 47000pF(473) | ±10%(K) | GRM31MR72A473KA01L | | | |
| 68000pF(683) | ±10%(K) | GRM31MR72A683KA01L | | | |
| 0.10μF(104) | ±10%(K) | GRM319R72A104KA01D | | | |
| 0.15μF(154) | ±10%(K) | GRM31MR72A154KA01L | GRM31MR71H154KA01L | | |
| 0.22μF(224) | ±10%(K) | GRM31MR72A224KA01L | GRM31MR71H224KA01L | | |
| 0.33μF(334) | ±10%(K) | | GRM319R71H334KA01D | | |
| 0.47μF(474) | ±10%(K) | GRM31MR72A474KA35L | GRM31MR71H474KA01L | | |
| 0.68μF(684) | ±10%(K) | GRM31MR72A684KA35L | GRM31MR71H684KA88L | | |
| 1.0μF(105) | ±10%(K) | | GRM31MR71H105KA88L | | |
| 2.2μF(225) | ±10%(K) | | | GRM31MR71E225KA93L | GRM31MR71C225KA35L |

| LxW [mm] | | 3.2x2.5(32)<1210> | |
|-------------------|-----------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 0.68μF(684) | ±10%(K) | GRM32CR72A684KA01L | GRM32NR71H684KA01L |
| 1.0μF(105) | ±10%(K) | GRM32CR72A105KA35L | |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code

1

High Dielectric Constant Type X6S(C8) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | |
|-------------------|-----------|---------------------|---------|
| Rated Volt. [Vdc] | | 6.3(0J) | 2.5(0E) |
| Capacitance | Tolerance | Part Number | |
| 15000pF(153) | ±10%(K) | GRM033C80J153KE01D* | |
| 22000pF(223) | ±10%(K) | GRM033C80J223KE01D* | |
| 33000pF(333) | ±10%(K) | GRM033C80J333KE01D* | |
| 47000pF(473) | ±10%(K) | GRM033C80J473KE19D* | |
| 0.10μF(104) | ±10%(K) | GRM033C80J104KE84D* | |
| 0.22μF(224) | ±10%(K) | GRM033C80E224ME15D* | |

| LxW [mm] | | 1.0x0.5(15)<0402> | | |
|-------------------|-----------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 68000pF(683) | ±10%(K) | GRM155C81E683KA12D | | |
| 0.10μF(104) | ±10%(K) | GRM155C81E104KA12D | | |
| 0.15μF(154) | ±10%(K) | | GRM155C80J154KE01D* | GRM155C80G154KE01D* |
| 0.22μF(224) | ±10%(K) | | GRM155C80J224KE01D* | GRM155C80G224KE01D* |
| 0.33μF(334) | ±10%(K) | | GRM155C80J334KE01D* | GRM155C80G334KE01D* |
| 0.47μF(474) | ±10%(K) | | GRM155C80J474KE19D* | GRM155C80G474KE01D* |
| 0.68μF(684) | ±10%(K) | | | GRM155C80G684KE19D* |

| LxW [mm] | | 1.6x0.8(18)<0603> | | | |
|-------------------|-----------|---------------------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) | 2.5(0E) |
| Capacitance | Tolerance | Part Number | | | |
| 1.0μF(105) | ±10%(K) | | | GRM188C80G105MA01D | |
| 2.2μF(225) | ±10%(K) | GRM188C81A225KE34D* | GRM188C80J225KE19D* | | |
| 4.7μF(475) | ±10%(K) | | | GRM188C80G475KE19D* | |
| 10μF(106) | ±20%(M) | | | | GRM188C80E106ME47D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|---------------------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 1.0μF(105) | ±10%(K) | | GRM216C81C105KA12D* | | |
| 2.2μF(225) | ±10%(K) | | GRM219C81C225KA12D* | | |
| 4.7μF(475) | ±10%(K) | GRM21BC81E475KA12L* | GRM21BC81C475KA88L* | GRM219C81A475KE34D* | GRM219C80J475KE19D* |
| 10μF(106) | ±10%(K) | | | GRM21BC81A106KE18L* | GRM21BC80J106KE19L* |
| | | | | | GRM219C80J106KE39D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 10μF(106) | ±10%(K) | GRM219C80G106KE19D* | |
| 22μF(226) | ±20%(M) | GRM21BC80G226ME39L* | |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code
 *: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR M 03 3 C8 0J 153 K E01 D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X6S(C8)/X6T(D8) Characteristics

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|-------------------|-----------|---------------------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 2.2μF(225) | ±10%(K) | | GRM316C81C225KA12D* | | |
| 4.7μF(475) | ±10%(K) | | GRM319C81C475KA12D* | | |
| 10μF(106) | ±10%(K) | GRM31CC81E106KE15L* | | | |
| 22μF(226) | ±20%(M) | | | GRM31CC81A226ME19L* | GRM31CC80J226ME19L* |
| 47μF(476) | ±20%(M) | | | | GRM31CC80J476ME18L* |

| LxW [mm] | | 3.2x1.6(31)<1206> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 47μF(476) | ±20%(M) | GRM31CC80G476ME19L* | |
| 100μF(107) | ±20%(M) | GRM31CD80G107ME39L* | |

| LxW [mm] | | 3.2x2.5(32)<1210> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 10μF(106) | ±10%(K) | GRM32DC81E106KA12L | | |
| 22μF(226) | ±20%(M) | GRM32EC81E226ME15L* | | |
| 47μF(476) | ±20%(M) | | GRM32EC81A476ME19L* | GRM32EC80J476ME64L* |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code
 *: Please refer to GRM Series Specifications and Test Method(2).

High Dielectric Constant Type X6S(C8) Characteristics Low Profile

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±10%(K) | GRM185C81A105KE36D* | GRM185C80J105KE26D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|---------------------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | | |
| 1.0μF(105) | ±10%(K) | GRM216C81C105KA12D* | | | |
| 2.2μF(225) | ±10%(K) | GRM219C81C225KA12D* | | | |
| 4.7μF(475) | ±10%(K) | | GRM219C81A475KE34D* | GRM219C80J475KE19D* | |
| 10μF(106) | ±10%(K) | | | GRM219C80J106KE39D* | GRM219C80G106KE19D* |

| LxW [mm] | | 3.2x1.6(31)<1206> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 16(1C) | |
| Capacitance | Tolerance | Part Number | |
| 2.2μF(225) | ±10%(K) | GRM316C81C225KA12D* | |
| 4.7μF(475) | ±10%(K) | GRM319C81C475KA12D* | |

| LxW [mm] | | 3.2x2.5(32)<1210> | |
|-------------------|-----------|--------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | |
| Capacitance | Tolerance | Part Number | |
| 10μF(106) | ±10%(K) | GRM32DC81E106KA12L | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code
 *: Please refer to GRM Series Specifications and Test Method(2).

1

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 0.4x0.2(02)<01005> | |
|-------------------|-----------|---------------------|---------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | |
| 68pF(680) | ±10%(K) | GRM022R61A680KA01L | |
| 100pF(101) | ±10%(K) | GRM022R61A101KA01L | |
| 150pF(151) | ±10%(K) | GRM022R61A151KA01L | |
| 220pF(221) | ±10%(K) | GRM022R61A221KA01L | |
| 330pF(331) | ±10%(K) | GRM022R61A331KA01L | |
| 470pF(471) | ±10%(K) | GRM022R61A471KA01L | |
| 680pF(681) | ±10%(K) | GRM022R60J681KE19L* | |
| 1000pF(102) | ±10%(K) | GRM022R60J102KE19L* | |
| 1500pF(152) | ±10%(K) | GRM022R60J152KE19L* | |
| 2200pF(222) | ±10%(K) | GRM022R60J222KE19L* | |
| 3300pF(332) | ±10%(K) | GRM022R60J332KE19L* | |
| 4700pF(472) | ±10%(K) | GRM022R60J472KE19L* | |
| 6800pF(682) | ±10%(K) | GRM022R60J682KE19L* | |
| 10000pF(103) | ±10%(K) | GRM022R60J103KE19L* | |

| LxW [mm] | | 0.6x0.3(03)<0201> | | | |
|-------------------|-----------|-------------------|--------|--------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 100pF(101) | ±10%(K) | | | | |
| 150pF(151) | ±10%(K) | | | | |
| 220pF(221) | ±10%(K) | | | | |
| 330pF(331) | ±10%(K) | | | | |
| 470pF(471) | ±10%(K) | | | | |
| 680pF(681) | ±10%(K) | | | | |
| 1000pF(102) | ±10%(K) | | | | |
| 1500pF(152) | ±10%(K) | | | | GRM033R61A152KA01D |
| 2200pF(222) | ±10%(K) | | | | GRM033R61A222KA01D |
| 3300pF(332) | ±10%(K) | | | | GRM033R61A332KA01D |
| 4700pF(472) | ±10%(K) | | | | GRM033R61A472KA01D |
| 6800pF(682) | ±10%(K) | | | | GRM033R61A682KA01D |
| 10000pF(103) | ±10%(K) | | | | GRM033R61A103KA01D |
| 15000pF(153) | ±10%(K) | | | | GRM033R60J153KE01D* |
| 22000pF(223) | ±10%(K) | | | | GRM033R60J223KE01D* |
| 33000pF(333) | ±10%(K) | | | | GRM033R60J333KE01D* |
| 47000pF(473) | ±10%(K) | | | | GRM033R60J473KE19D* |
| 0.10μF(104) | ±10%(K) | | | | GRM033R61A104KE84D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

[]: Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR** **M** **02** **2** **R6** **1A** **680** **K** **A01** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging*

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

*GRM022: D is applicable.

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 1.0x0.5(15)<0402> | | | |
|-------------------|-----------|-------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 220pF(221) | ±10%(K) | | | | |
| 330pF(331) | ±10%(K) | | | | |
| 470pF(471) | ±10%(K) | | | | |
| 680pF(681) | ±10%(K) | | | | |
| 1000pF(102) | ±10%(K) | | GRM155R61H102KA01D | | |
| 1500pF(152) | ±10%(K) | | | | |
| 2200pF(222) | ±10%(K) | | GRM155R61H222KA01D | | |
| 3300pF(332) | ±10%(K) | | | | |
| 4700pF(472) | ±10%(K) | | GRM155R61H472KA01D | | |
| 6800pF(682) | ±10%(K) | | | | |
| 10000pF(103) | ±10%(K) | | | | |
| 15000pF(153) | ±10%(K) | | | | |
| 22000pF(223) | ±10%(K) | | | | GRM155R61C223KA01D |
| 33000pF(333) | ±10%(K) | | | | GRM155R61C333KA01D |
| 47000pF(473) | ±10%(K) | | | | GRM155R61C473KA01D |
| 68000pF(683) | ±10%(K) | | | GRM155R61E683KA87D | GRM155R61C683KA88D |
| 0.10μF(104) | ±10%(K) | | | GRM155R61E104KA87D | GRM155R61C104KA88D |

| LxW [mm] | | 1.0x0.5(15)<0402> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 33000pF(333) | ±10%(K) | GRM155R61A333KA01D | | |
| 47000pF(473) | ±10%(K) | GRM155R61A473KA01D | | |
| 68000pF(683) | ±10%(K) | GRM155R61A683KA01D | | |
| 0.10μF(104) | ±10%(K) | GRM155R61A104KA01D | | |
| 0.15μF(154) | ±10%(K) | GRM155R61A154KE19D* | GRM155R60J154KE01D* | |
| 0.22μF(224) | ±10%(K) | GRM155R61A224KE19D* | GRM155R60J224KE01D* | |
| 0.33μF(334) | ±10%(K) | GRM155R61A334KE15D* | GRM155R60J334KE01D* | |
| 0.47μF(474) | ±10%(K) | GRM155R61A474KE15D* | GRM155R60J474KE19D* | |
| 0.68μF(684) | ±10%(K) | GRM155R61A684KE15D* | GRM155R60J684KE19D* | |
| 1.0μF(105) | ±10%(K) | GRM155R61A105KE15D* | | |
| 4.7μF(475) | ±20%(M) | | | GRM155R60G475ME87D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

[]: Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

1

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | | | |
|-------------------|-----------|-------------------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 220pF(221) | ±10%(K) | | | | |
| 330pF(331) | ±10%(K) | | | | |
| 470pF(471) | ±10%(K) | | | | |
| 680pF(681) | ±10%(K) | | | | |
| 1000pF(102) | ±10%(K) | | GRM188R61H102KA01D | | |
| 1500pF(152) | ±10%(K) | | | | |
| 2200pF(222) | ±10%(K) | | GRM188R61H222KA01D | | |
| 3300pF(332) | ±10%(K) | | | | |
| 4700pF(472) | ±10%(K) | | GRM188R61H472KA01D | | |
| 6800pF(682) | ±10%(K) | | | | |
| 10000pF(103) | ±10%(K) | | GRM188R61H103KA01D | | |
| 15000pF(153) | ±10%(K) | | | | |
| 22000pF(223) | ±10%(K) | | GRM188R61H223KA01D | | |
| 33000pF(333) | ±10%(K) | | | | |
| 47000pF(473) | ±10%(K) | | | | |
| 68000pF(683) | ±10%(K) | | | | |
| 0.10μF(104) | ±10%(K) | | | GRM188R61E104KA01D | GRM188R61C104KA01D |
| 0.15μF(154) | ±10%(K) | | | | |
| 0.22μF(224) | ±10%(K) | | | GRM188R61E224KA88D | GRM188R61C224KA88D |
| 0.33μF(334) | ±10%(K) | | | | |
| 0.47μF(474) | ±10%(K) | | | GRM188R61E474KA12D* | GRM188R61C474KA93D* |
| 1.0μF(105) | ±10%(K) | | | GRM188R61E105KA12D* | GRM188R61C105KA93D* |
| 2.2μF(225) | ±10%(K) | | | | GRM188R61C225KE15D* |

| LxW [mm] | | 1.6x0.8(18)<0603> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 0.15μF(154) | ±10%(K) | GRM188R61A154KA01D | | |
| 0.22μF(224) | ±10%(K) | GRM188R61A224KA01D | | |
| 0.33μF(334) | ±10%(K) | | | |
| 0.47μF(474) | ±10%(K) | GRM188R61A474KA61D | | |
| 0.68μF(684) | ±10%(K) | | | |
| 2.2μF(225) | ±10%(K) | GRM188R61A225KE34D* | | |
| 4.7μF(475) | ±10%(K) | | GRM188R60J475KE19D* | |
| 10μF(106) | ±20%(M) | | GRM188R60J106ME47D* | GRM188R60G106ME47D* |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

[] : Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR M 18 8 R6 1H 102 K A01 D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 6800pF(682) | ±10%(K) | | | | |
| 10000pF(103) | ±10%(K) | | | | |
| 15000pF(153) | ±10%(K) | | | | |
| 22000pF(223) | ±10%(K) | | | | |
| 33000pF(333) | ±10%(K) | | | | |
| 47000pF(473) | ±10%(K) | | | | |
| 68000pF(683) | ±10%(K) | | | | |
| 0.10μF(104) | ±10%(K) | | | | |
| 0.15μF(154) | ±10%(K) | | | | |
| 0.22μF(224) | ±10%(K) | | | | |
| 0.33μF(334) | ±10%(K) | | | | GRM21BR61C334KA01L |
| 0.47μF(474) | ±10%(K) | | | | GRM21BR61C474KA01L |
| 0.68μF(684) | ±10%(K) | | | | |
| 1.0μF(105) | ±10%(K) | | | GRM216R61E105KA12D | GRM21BR61C105KA01L |
| 2.2μF(225) | ±10%(K) | | | GRM21BR61E225KA12L | GRM21BR61C225KA88L* |
| | | | | GRM219R61E225KA12D* | GRM219R61C225KA88D* |
| 4.7μF(475) | ±10%(K) | | | GRM21BR61E475KA12L* | GRM21BR61C475KA88L* |
| | | | | | GRM219R61C475KE15D* |
| 10μF(106) | ±10%(K) | | | | GRM21BR61C106KE15L* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 2.2μF(225) | ±10%(K) | GRM21BR61A225KA01L | | |
| 4.7μF(475) | ±10%(K) | GRM219R61A475KE34D* | | |
| 10μF(106) | ±10%(K) | GRM21BR61A106KE19L* | GRM219R60J106KE19D* | |
| | | GRM219R61A106KE44D* | | |
| 22μF(226) | ±20%(M) | | GRM21BR60J226ME39L* | GRM219R60G226ME66D* |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

[] : Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

1

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|-------------------|-----------|-------------------|--------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 15000pF(153) | ±10%(K) | | | | |
| 22000pF(223) | ±10%(K) | | | | |
| 33000pF(333) | ±10%(K) | | | | |
| 47000pF(473) | ±10%(K) | | | | |
| 68000pF(683) | ±10%(K) | | | | |
| 0.10μF(104) | ±10%(K) | | | | |
| 0.15μF(154) | ±10%(K) | | | | |
| 0.22μF(224) | ±10%(K) | | | | |
| 0.33μF(334) | ±10%(K) | | | | |
| 0.47μF(474) | ±10%(K) | | | | |
| 0.68μF(684) | ±10%(K) | | | | |
| 1.0μF(105) | ±10%(K) | | | | |
| 2.2μF(225) | ±10%(K) | | GRM31CR61H225KA88L | GRM316R61E225KA12D* | |
| 4.7μF(475) | ±10%(K) | | | GRM31CR61E475KA88L | GRM31CR61C475KA01L |
| | | | | GRM319R61E475KA12D* | GRM319R61C475KA88D* |
| 10μF(106) | ±10%(K) | | | GRM31CR61E106KA12L* | GRM31CR61C106KA88L |
| | | | | | GRM319R61C106KE15D* |
| 22μF(226) | ±20%(M) | | | | GRM31CR61C226ME15L* |

| LxW [mm] | | 3.2x1.6(31)<1206> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 10μF(106) | ±10%(K) | GRM319R61A106KE19L* | | |
| 22μF(226) | ±20%(M) | GRM31CR61A226ME19L* | GRM31CR60J226ME19L* | |
| 47μF(476) | ±20%(M) | | GRM31CR60J476ME19L* | |
| 100μF(107) | ±20%(M) | | GRM31CR60J107ME39L* | GRM31CR60G107ME39L* |

| LxW [mm] | | 3.2x2.5(32)<1210> | | | |
|-------------------|-----------|-------------------|--------|--------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 35(YA) | 25(1E) |
| Capacitance | Tolerance | Part Number | | | |
| 0.68μF(684) | ±10%(K) | | | | |
| 1.0μF(105) | ±10%(K) | | | | |
| 2.2μF(225) | ±10%(K) | | | | |
| 4.7μF(475) | ±10%(K) | | | | |
| 10μF(106) | ±10%(K) | | | GRM32ER6YA106KA12L | GRM32DR61E106KA12L |
| 22μF(226) | ±20%(M) | | | | GRM32ER61E226ME15L* |

| LxW [mm] | | 3.2x2.5(32)<1210> | | |
|-------------------|-----------|---------------------|---------------------|---------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 22μF(226) | ±20%(M) | | | |
| 47μF(476) | ±20%(M) | GRM32ER61C476ME15L* | GRM32ER61A476ME20L* | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

[]: Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR M 31 C R6 1H 225 K A88 L** ①Product ID ②Series ③Dimension (LxW) ④Dimension (T)
 ⑤Temperature Characteristics ⑥Rated Voltage ⑦Capacitance
 ⑧Capacitance Tolerance ⑨Individual Specification Code ⑩Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X5R(R6) Characteristics Low Profile

| LxW [mm] | | 1.0x0.5(15)<0402> | | |
|-------------------|-----------|-------------------|--------|--------|
| Rated Volt. [Vdc] | | 16(1C) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | |
| 220pF(221) | ±10%(K) | | | |
| 330pF(331) | ±10%(K) | | | |
| 470pF(471) | ±10%(K) | | | |
| 680pF(681) | ±10%(K) | | | |
| 1000pF(102) | ±10%(K) | | | |
| 1500pF(152) | ±10%(K) | | | |
| 2200pF(222) | ±10%(K) | | | |
| 3300pF(332) | ±10%(K) | | | |
| 4700pF(472) | ±10%(K) | | | |
| 6800pF(682) | ±10%(K) | | | |
| 10000pF(103) | ±10%(K) | | | |

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±10%(K) | GRM185R61C105KE44D* | GRM185R61A105KE36D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 6800pF(682) | ±10%(K) | | | | |
| 33000pF(333) | ±10%(K) | | | | |
| 68000pF(683) | ±10%(K) | | | | |
| 0.22μF(224) | ±10%(K) | | | | |
| 0.33μF(334) | ±10%(K) | | | | |
| 0.47μF(474) | ±10%(K) | | | | |
| 0.68μF(684) | ±10%(K) | | | | |
| 1.0μF(105) | ±10%(K) | | | GRM216R61E105KA12D | |
| 2.2μF(225) | ±10%(K) | | | GRM219R61E225KA12D* | GRM219R61C225KA88D* |
| 4.7μF(475) | ±10%(K) | | | | GRM219R61C475KE15D* |

| LxW [mm] | | 2.0x1.25(21)<0805> | | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 4.7μF(475) | ±10%(K) | GRM219R61A475KE34D* | | |
| 10μF(106) | ±10%(K) | GRM219R61A106KE44D* | GRM219R60J106KE19D* | |
| 22μF(226) | ±20%(M) | | | GRM219R60G226ME66D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

[] : Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

1

High Dielectric Constant Type X5R(R6) Characteristics Low Profile

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|-------------------|-----------|-------------------|--------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | | |
| 15000pF(153) | ±10%(K) | | | | |
| 22000pF(223) | ±10%(K) | | | | |
| 33000pF(333) | ±10%(K) | | | | |
| 47000pF(473) | ±10%(K) | | | | |
| 68000pF(683) | ±10%(K) | | | | |
| 0.10μF(104) | ±10%(K) | | | | |
| 0.15μF(154) | ±10%(K) | | | | |
| 0.22μF(224) | ±10%(K) | | | | |
| 0.33μF(334) | ±10%(K) | | | | |
| 0.47μF(474) | ±10%(K) | | | | |
| 0.68μF(684) | ±10%(K) | | | | |
| 1.0μF(105) | ±10%(K) | | | | |
| 2.2μF(225) | ±10%(K) | | | GRM316R61E225KA12D* | |
| 4.7μF(475) | ±10%(K) | | | GRM319R61E475KA12D* | GRM319R61C475KA88D* |
| 10μF(106) | ±10%(K) | | | | GRM319R61C106KE15D* |

| LxW [mm] | | 3.2x1.6(31)<1206> |
|-------------------|-----------|---------------------|
| Rated Volt. [Vdc] | | 10(1A) |
| Capacitance | Tolerance | Part Number |
| 10μF(106) | ±10%(K) | GRM319R61A106KE19D* |

| LxW [mm] | | 3.2x2.5(32)<1210> | | |
|-------------------|-----------|-------------------|--------|--------------------|
| Rated Volt. [Vdc] | | 100(2A) | 50(1H) | 25(1E) |
| Capacitance | Tolerance | Part Number | | |
| 0.68μF(684) | ±10%(K) | | | |
| 1.0μF(105) | ±10%(K) | | | |
| 10μF(106) | ±10%(K) | | | GRM32DR61E106KA12L |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

[] : Please refer to X7R(R7) etc Characteristics.

*: Please refer to GRM Series Specifications and Test Method(2).

(Part Number) **GR** **M** **31** **6** **R6** **1E** **225** **K** **A12** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection

1

(Note1) This Specifications and Test Methods indicates typical inspection. Please refer to individual specifications (our product specifications or the approval sheet).
 In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

| No. | Item | Specifications | | Test Method | | | | | | | | | | | | | | | |
|-----------|---------------------------------|--|--|--|---|-------|---------------------------------|--|---------------------|----|-----------|----------|----------|-----------|----------|---------|--------------|-----------|-------------|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | |
| 1 | Operating Temperature Range | -55 to +125°C (2P/R/S/T, 3P/R/S/T/U, 4P/R/S/T/U: -25 to +85°C) | B1, B3, F1: -25 to +85°C R1, R7: -55 to +125°C R6: -55 to +85°C C8: -55 to +105°C E4: +10 to +85°C F5: -30 to +85°C | Reference temperature: 25°C (2Δ, 3Δ, 4Δ, B1, B3, F1, R1: 20°C) | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | | Visual inspection | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions | | Using calipers (GRM02 size is based on Microscope) | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | | No failure should be observed when 300%* of the rated voltage (temperature compensating type) or 250% of the rated voltage (high dielectric constant type) is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. *200% for 500V | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | C≤0.047μF: More than 10,000MΩ C>0.047μF: More than 500Ω · F C: Nominal Capacitance | | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 20/25°C and 75%RH max. and within 2 minutes of charging, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | | The capacitance/Q/D.F. should be measured at 20/25°C at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | |
| 8 | Q/ Dissipation Factor (D.F.) | 30pF and over: Q≥1000 30pF and below: Q≥400+20C C: Nominal Capacitance (pF) | [R6, R7, C8] W.V.: 100V : 0.025 max. (C<0.068μF) : 0.05 max. (C≥0.068μF) W.V.: 50/35/25V: : 0.025 max.* *GRM32D R7/R6/C8 1E106: 0.035 max. W.V.: 16/10V: 0.035 max. W.V.: 6.3/4V : 0.05 max. (C<3.3μF) : 0.1 max. (C≥3.3μF) [E4] W.V.: 25Vmin: 0.025 max. [F1, F5] W.V.: 25V min. : 0.05 max. (C<0.1μF) : 0.09 max. (C≥0.1μF) W.V.: 16/10V: 0.125 max. W.V.: 6.3V: 0.15 max. | | <table border="1"> <thead> <tr> <th>Char.</th> <th>ΔC to 7U, 1X (1000pF and below)</th> <th>ΔC to 7U, 1X (more than 1000pF) R6, R7, C8, F5, B1, B3, F1</th> <th>R6, R7, F5 (C>10μF)</th> <th>E4</th> </tr> </thead> <tbody> <tr> <td>Frequency</td> <td>1±0.1MHz</td> <td>1±0.1kHz</td> <td>120±24kHz</td> <td>1±0.1kHz</td> </tr> <tr> <td>Voltage</td> <td>0.5 to 5Vrms</td> <td>1±0.2Vrms</td> <td>0.5±0.1Vrms</td> <td>0.5±0.05Vrms</td> </tr> </tbody> </table> | Char. | ΔC to 7U, 1X (1000pF and below) | ΔC to 7U, 1X (more than 1000pF) R6, R7, C8, F5, B1, B3, F1 | R6, R7, F5 (C>10μF) | E4 | Frequency | 1±0.1MHz | 1±0.1kHz | 120±24kHz | 1±0.1kHz | Voltage | 0.5 to 5Vrms | 1±0.2Vrms | 0.5±0.1Vrms |
| Char. | ΔC to 7U, 1X (1000pF and below) | ΔC to 7U, 1X (more than 1000pF) R6, R7, C8, F5, B1, B3, F1 | R6, R7, F5 (C>10μF) | E4 | | | | | | | | | | | | | | | |
| Frequency | 1±0.1MHz | 1±0.1kHz | 120±24kHz | 1±0.1kHz | | | | | | | | | | | | | | | |
| Voltage | 0.5 to 5Vrms | 1±0.2Vrms | 0.5±0.1Vrms | 0.5±0.05Vrms | | | | | | | | | | | | | | | |

Continued on the following page. ↗

1

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection


(Note1) This Specifications and Test Methods indicates typical inspection.

Please refer to individual specifications (our product specifications or the approval sheet).

In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).

In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.
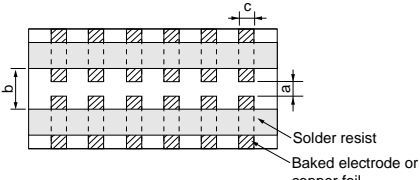
| No. | Item | Specifications | | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|---|---|---|---|--|------|---|---|---|-------|-----|------|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias | B1, B3: Within $\pm 10\%$ (-25 to +85°C) R1, R7: Within $\pm 15\%$ (-55 to +125°C) R6: Within $\pm 15\%$ (-55 to +85°C) E4: Within +22/-56% (+10 to +85°C) F1: Within +30/-80% (-25 to +85°C) F5: Within +22/-82% (-30 to +85°C) C8: Within $\pm 22\%$ (-55 to +105°C) | The capacitance change should be measured after 5 min. at each specified temp. stage. (1) Temperature Compensating Type The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5 (5C: +25 to +125°C/ Δ C: +20 to +125°C: other temp. coeffs.: +25 to +85°C/+20 to +85°C) the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as Table A-1. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in the step 1, 3 and 5 by the cap. value in step 3. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50% of the Rated Voltage | B1: Within +10/-30% R1: Within +15/-40% F1: Within +30/-95% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Drift | *Initial measurement for high dielectric constant type Perform a heat treatment at 150+0/-10°C for one hour and then set for 24 \pm 2 hours at room temperature. Perform the initial measurement. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | | Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 1a using an eutectic solder. Then apply 10N* force in parallel with the test jig for 10 \pm 1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. *1N (GRM02), 2N (GRM03), 5N (GRM15, GRM18) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | |  | | | (in mm) <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GRM02</td> <td>0.2</td> <td>0.56</td> <td>0.23</td> </tr> <tr> <td>GRM03</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>GRM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>GRM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GRM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>GRM31</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>GRM32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>GRM43</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>GRM55</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> | Type | a | b | c | GRM02 | 0.2 | 0.56 | 0.23 | GRM03 | 0.3 | 0.9 | 0.3 | GRM15 | 0.4 | 1.5 | 0.5 | GRM18 | 1.0 | 3.0 | 1.2 | GRM21 | 1.2 | 4.0 | 1.65 | GRM31 | 2.2 | 5.0 | 2.0 | GRM32 | 2.2 | 5.0 | 2.9 | GRM43 | 3.5 | 7.0 | 3.7 | GRM55 | 4.5 | 8.0 | 5.6 |
| | | Type | a | | | b | c | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM02 | 0.2 | 0.56 | 0.23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM03 | 0.3 | 0.9 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM15 | 0.4 | 1.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM31 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM43 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM55 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fig. 1a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued on the following page. ↗

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection

1



(Note1) This Specifications and Test Methods indicates typical inspection.

Please refer to individual specifications (our product specifications or the approval sheet).

In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).

In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.
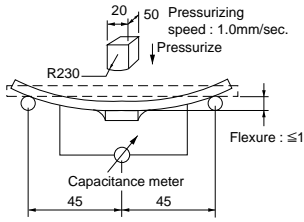
| No. | Item | Specifications | | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------|--|-------------------------------------|--|------|---|---|---|-------|-----|------|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Appearance | No defects or abnormalities | | Solder the capacitor on the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Vibration Resistance | Q/D.F. | 30pF and over: $Q \geq 1000$ | [B1, B3, R6, R7, C8] W.V.: 100V : 0.025 max. (C<0.068μF) : 0.05 max. (C≥0.068μF) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 30pF and below: $Q \geq 400+20C$ | W.V.: 50/35/25V: : 0.025 max.* *GRM32D R7/R6/C8 1E106: 0.035 max. W.V.: 16/10V: 0.035 max. W.V.: 6.3/4V : 0.05 max. (C<3.3μF) : 0.1 max. (C≥3.3μF) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Q/D.F. | C: Nominal Capacitance (pF) | | [E4] W.V.: 25Vmin: 0.025 max. [F1, F5] W.V.: 25V min. : 0.05 max. (C<0.1μF) : 0.09 max. (C≥0.1μF) W.V.: 16/10V: 0.125 max. W.V.: 6.3V: 0.15 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Appearance | No marking defects | | Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2a using an eutectic solder. Then apply a force in the direction shown in Fig. 3a for 5±1 sec. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±5% or ±0.5pF (Whichever is larger) | Within ±10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Deflection |  <p>Fig. 3a</p> | |  <p>Fig. 2a</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GRM02</td> <td>0.2</td> <td>0.56</td> <td>0.23</td> </tr> <tr> <td>GRM03</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>GRM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>GRM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GRM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>GRM31</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>GRM32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>GRM43</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>GRM55</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> <p>(in mm)</p> | Type | a | b | c | GRM02 | 0.2 | 0.56 | 0.23 | GRM03 | 0.3 | 0.9 | 0.3 | GRM15 | 0.4 | 1.5 | 0.5 | GRM18 | 1.0 | 3.0 | 1.2 | GRM21 | 1.2 | 4.0 | 1.65 | GRM31 | 2.2 | 5.0 | 2.0 | GRM32 | 2.2 | 5.0 | 2.9 | GRM43 | 3.5 | 7.0 | 3.7 | GRM55 | 4.5 | 8.0 | 5.6 |
| | | Type | a | b | c | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM02 | 0.2 | 0.56 | 0.23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM03 | 0.3 | 0.9 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM15 | 0.4 | 1.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM31 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM43 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM55 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in an eutectic solder solution for 2±0.5 seconds at 230±5°C or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued on the following page.

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection

(Note1) This Specifications and Test Methods indicates typical inspection. Please refer to individual specifications (our product specifications or the approval sheet).
 In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.

| No. | Item | Specifications | | Test Method | |
|-----|------------------------------|---|---|---|--|
| | | Temperature Compensating Type | High Dielectric Type | | |
| 14 | Resistance to Soldering Heat | The measured and observed characteristics should satisfy the specifications in the following table. | | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in an eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Set at room temperature for 24±2 hours, then measure. •Initial measurement for high dielectric constant type Perform a heat treatment at 150+0/-10°C for one hour and then set at room temperature for 24±2 hours. Perform the initial measurement. •Preheating for GRM32/43/55 | |
| | | Appearance | No defects or abnormalities | | |
| | | Capacitance Change | Within ±2.5% or ±0.25pF (Whichever is larger) | | B1, B3, R1, R6, R7, C8 : Within ±7.5% F1, F5, E4: Within ±20% |
| | | Q/D.F. | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400+20C$ C: Nominal Capacitance (pF) | | [B1, B3, R6, R7, C8] W.V.: 100V : 0.025 max. (C<0.068μF) : 0.05 max. (C≥0.068μF) W.V.: 50/35/25V: : 0.025 max.* *GRM32D R7/R6/C8 1E106: 0.035 max. W.V.: 16/10V: 0.035 max. W.V.: 6.3/4V : 0.05 max. (C<3.3μF) : 0.1 max. (C≥3.3μF) [E4] W.V.: 25Vmin: 0.025 max. [F1, F5] W.V.: 25V min. : 0.05 max. (C<0.1μF) : 0.09 max. (C≥0.1μF) W.V.: 16/10V: 0.125 max. W.V.: 6.3V: 0.15 max. |
| | | I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | |
| | | Dielectric Strength | No defects | | |
| 15 | Temperature Cycle | The measured and observed characteristics should satisfy the specifications in the following table. | | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments shown in the following table. Set for 24±2 hours at room temperature, then measure. | |
| | | Appearance | No defects or abnormalities | | |
| | | Capacitance Change | Within ±2.5% or ±0.25pF (Whichever is larger) | | B1, B3, R1, R6, R7, C8 : Within ±7.5% F1, F5, E4: Within ±20% |
| | | Q/D.F. | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400+20C$ C: Nominal Capacitance (pF) | | [B1, B3, R6, R7, C8] W.V.: 100V : 0.025 max. (C<0.068μF) : 0.05 max. (C≥0.068μF) W.V.: 50/35/25V: : 0.025 max.* *GRM32D R7/R6/C8 1E106: 0.035 max. W.V.: 16/10V: 0.035 max. W.V.: 6.3/4V : 0.05 max. (C<3.3μF) : 0.1 max. (C≥3.3μF) [E4] W.V.: 25Vmin: 0.05 max. [F1, F5] W.V.: 25V min. : 0.05 max. (C<0.1μF) : 0.09 max. (C≥0.1μF) W.V.: 16/10V: 0.125 max. W.V.: 6.3V: 0.15 max. |
| | | I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | |
| | | Dielectric Strength | No defects | | |

| Step | Temperature | Time |
|------|--------------|--------|
| 1 | 100 to 120°C | 1 min. |
| 2 | 170 to 200°C | 1 min. |

| Step | 1 | 2 | 3 | 4 |
|-------------|----------------------------|------------|----------------------------|------------|
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. |
| Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |

Continued on the following page. ↗

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection

1

(Note1) This Specifications and Test Methods indicates typical inspection.

Please refer to individual specifications (our product specifications or the approval sheet).

In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).

In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.

| No. | Item | Specifications | | Test Method | |
|-----|-------------------------|---|---|--|---|
| | | Temperature Compensating Type | High Dielectric Type | | |
| 16 | Humidity (Steady State) | The measured and observed characteristics should satisfy the specifications in the following table. | | Set the capacitor at 40±2°C and in 90 to 95% humidity for 500±12 hours. Remove and set for 24±2 hours at room temperature, then measure. | |
| | | Appearance | No defects or abnormalities | | |
| | | Capacitance Change | Within ±5% or ±0.5pF (Whichever is larger) | | B1, B3, R1, R6, R7, C8 : Within ±12.5% F1, F5, E4: Within ±30% |
| | | Q/D.F. | 30pF and over: Q≥350 10pF and over 30pF and below: Q≥275+2.5C 10pF and below: Q≥200+10C C: Nominal Capacitance (pF) | | [R6, R7, C8] W.V.: 100V : 0.05 max. (C<0.068μF) : 0.075 max. (C≥0.068μF) W.V.: 50/35/25/16/10V : 0.05 max. W.V.: 6.3/4V : 0.075 max. (C<3.3μF) : 0.125 max. (C≥3.3μF) [E4] W.V.: 25Vmin: 0.05 max. [F1, F5] W.V.: 25V min. : 0.075 max. (C<0.1μF) : 0.125 max. (C≥0.1μF) W.V.: 16/10V: 0.15 max. W.V.: 6.3V: 0.2 max. |
| | | I.R. | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | |
| 17 | Humidity Load | The measured and observed characteristics should satisfy the specifications in the following table. | | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and set for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. •Initial measurement for F1, F5/10V max. Apply the rated DC voltage for 1 hour at 40±2°C. Remove and set for 24±2 hours at room temperature. Perform initial measurement. | |
| | | Appearance | No defects or abnormalities | | |
| | | Capacitance Change | Within ±7.5% or ±0.75pF (Whichever is larger) | | B1, B3, R1, R6, R7, C8 : Within ±12.5% F1, F5, E4: Within ±30% [W.V.: 10V max.] F1, F5: Within +30/-40% |
| | | Q/D.F. | 30pF and over: Q≥200 30pF and below: Q≥100+10C/3 C: Nominal Capacitance (pF) | | [B1, B3, R6, R7, C8] W.V.: 100V : 0.05 max. (C<0.068μF) : 0.075 max. (C≥0.068μF) W.V.: 50/35/25/16/10V : 0.05 max. W.V.: 6.3/4V : 0.075 max. (C<3.3μF) : 0.125 max. (C≥3.3μF) [E4] W.V.: 25Vmin: 0.05 max. [F1, F5] W.V.: 25V min. : 0.075 max. (C<0.1μF) : 0.125 max. (C≥0.1μF) W.V.: 16/10V: 0.15 max. W.V.: 6.3V: 0.2 max. |
| | | I.R. | More than 500MΩ or 25Ω · F (Whichever is smaller) | | |

Continued on the following page. ↗

1

GRM Series Specifications and Test Methods (1) (Note1) Typical Inspection

(Note1) This Specifications and Test Methods indicates typical inspection. Please refer to individual specifications (our product specifications or the approval sheet).
 In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.

| No. | Item | Specifications | | Test Method | |
|------|--|---|--|---|---|
| | | Temperature Compensating Type | High Dielectric Type | | |
| 18 | High Temperature Load | The measured and observed characteristics should satisfy the specifications in the following table. | | | Apply 200%* of the rated voltage at the maximum operating temperature $\pm 3^{\circ}\text{C}$ for 1000 \pm 12 hours. Set for 24 \pm 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. *Initial measurement for high dielectric constant type. Apply 200% of the rated voltage* at the maximum operating temperature $\pm 3^{\circ}\text{C}$ for one hour. Remove and set for 24 \pm 2 hours at room temperature. Perform initial measurement. *GRM155C81E 683/104, GRM21BR71H105, GRM21BR72A474, GRM21BR71C225, GRM31CR71H475, GRM32E R6/R7 YA106, GRM32D R7/R6/C8 1E106: 150% of the rated voltage. |
| | | Appearance | No defects or abnormalities | | |
| | | Capacitance Change | Within $\pm 3\%$ or $\pm 0.3\text{pF}$ (Whichever is larger) | B1, B3, R1, R6, R7, C8 : Within $\pm 12.5\%$ F1, F5, E4: Within $\pm 30\%$ [Except 10V max. and. $C \geq 1.0\mu\text{F}$] F1, F5: Within $+30/-40\%$ [10V max. and $C \geq 1.0\mu\text{F}$] | |
| | | Q/D.F. | 30pF and over: $Q \geq 350$ 10pF and over 30pF and below: $Q \geq 275+2.5C$ 10pF and below: $Q \geq 200+10C$ C: Nominal Capacitance (pF) | [B1, B3, R6, R7, C8] W.V.: 100V : 0.05 max. ($C < 0.068\mu\text{F}$) : 0.075 max. ($C \geq 0.068\mu\text{F}$) W.V.: 50/35/25/16/10V : 0.05 max. W.V.: 6.3/4V : 0.075 max. ($C < 3.3\mu\text{F}$) : 0.125 max. ($C \geq 3.3\mu\text{F}$) [E4] W.V.: 25Vmin: 0.05 max. [F1, F5] W.V.: 25V min. : 0.075 max. ($C < 0.1\mu\text{F}$) : 0.125 max. ($C \geq 0.1\mu\text{F}$) W.V.: 16/10V: 0.15 max. W.V.: 6.3V: 0.2 max. | |
| I.R. | More than 1,000M Ω or 50 $\Omega \cdot \text{F}$ (Whichever is smaller) | | | | |

Table A-1 (1)

| Char. | Nominal Values (ppm/ $^{\circ}\text{C}$)*1 | Capacitance Change from 25 $^{\circ}\text{C}$ (%) | | | | | |
|-------|---|---|-------|------|-------|------|-------|
| | | -55 | | -30 | | -10 | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C | 0 \pm 30 | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |
| 6C | 0 \pm 60 | 0.87 | -0.48 | 0.59 | -0.33 | 0.38 | -0.21 |
| 6P | -150 \pm 60 | 2.33 | 0.72 | 1.61 | 0.50 | 1.02 | 0.32 |
| 6R | -220 \pm 60 | 3.02 | 1.28 | 2.08 | 0.88 | 1.32 | 0.56 |
| 6S | -330 \pm 60 | 4.09 | 2.16 | 2.81 | 1.49 | 1.79 | 0.95 |
| 6T | -470 \pm 60 | 5.46 | 3.28 | 3.75 | 2.26 | 2.39 | 1.44 |
| 7U | -750 \pm 120 | 8.78 | 5.04 | 6.04 | 3.47 | 3.84 | 2.21 |
| 1X | +350 to -1000 | - | - | - | - | - | - |

*1: Nominal values denote the temperature coefficient within a range of 25 $^{\circ}\text{C}$ to 125 $^{\circ}\text{C}$ (for ΔC)/85 $^{\circ}\text{C}$ (for other TC).

(2)

| Char. | Nominal Values (ppm/ $^{\circ}\text{C}$)*2 | Capacitance Change from 20 $^{\circ}\text{C}$ (%) | | | | | |
|-------|---|---|-------|------|-------|------|-------|
| | | -55 | | -25 | | -10 | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 2C | 0 \pm 60 | 0.82 | -0.45 | 0.49 | -0.27 | 0.33 | -0.18 |
| 3C | 0 \pm 120 | 1.37 | -0.90 | 0.82 | -0.54 | 0.55 | -0.36 |
| 4C | 0 \pm 250 | 2.56 | -1.88 | 1.54 | -1.13 | 1.02 | -0.75 |
| 2P | -150 \pm 60 | - | - | 1.32 | 0.41 | 0.88 | 0.27 |
| 3P | -150 \pm 120 | - | - | 1.65 | 0.14 | 1.10 | 0.09 |
| 4P | -150 \pm 250 | - | - | 2.36 | -0.45 | 1.57 | -0.30 |
| 2R | -220 \pm 60 | - | - | 1.70 | 0.72 | 1.13 | 0.48 |
| 3R | -220 \pm 120 | - | - | 2.03 | 0.45 | 1.35 | 0.30 |
| 4R | -220 \pm 250 | - | - | 2.74 | -0.14 | 1.83 | -0.09 |
| 2S | -330 \pm 60 | - | - | 2.30 | 1.22 | 1.54 | 0.81 |
| 3S | -330 \pm 120 | - | - | 2.63 | 0.95 | 1.76 | 0.63 |
| 4S | -330 \pm 250 | - | - | 3.35 | 0.36 | 2.23 | 0.24 |
| 2T | -470 \pm 60 | - | - | 3.07 | 1.85 | 2.05 | 1.23 |
| 3T | -470 \pm 120 | - | - | 3.40 | 1.58 | 2.27 | 1.05 |
| 4T | -470 \pm 250 | - | - | 4.12 | 0.99 | 2.74 | 0.66 |
| 3U | -750 \pm 120 | - | - | 4.94 | 2.84 | 3.29 | 1.89 |
| 4U | -750 \pm 250 | - | - | 5.65 | 2.25 | 3.77 | 1.50 |

*2: Nominal values denote the temperature coefficient within a range of 20 $^{\circ}\text{C}$ to 125 $^{\circ}\text{C}$ (for ΔC)/85 $^{\circ}\text{C}$ (for other TC).

GRM Series Specifications and Test Methods (2) (Note1) Typical Inspection

1

(Note1) This Specifications and Test Methods indicates typical inspection. Please refer to individual specifications (our product specifications or the approval sheet).
 In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|---|--|--|-------|----|------------|--------|-------|-------|-----|--------|-------|----|-----|--------|-------|-------|-----|--------|-------|----|-----|--------|-------|----|-----|--------|-------|-------|----------|--------|----|----|-----|--------|-------|-------|-----|--------|-------|----|-----|--------|-------|-------|-----|--|---------------------|---------------------|-------------------|----------------------|----------|-------------|----------------------|----------|-------------|----------|----------|-------------|
| 1 | Operating Temperature Range | B1, B3, F1: -25 to +85°C R1, R7, C7, D7, E7: -55 to +125°C C6, R6: -55 to +85°C F5: -30 to +85°C C8, D8: -55 to +105°C, | Reference temperature: 25°C (B1, B3, R1, F1: 20°C) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions | Using calipers (GRM02 size is based on Microscope) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | More than 50Ω · F | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at reference temperature and 75%RH max. and within 1 minutes of charging, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance *Table 1 <table border="1"> <thead> <tr> <th>GRM155</th> <th>B3/R6</th> <th>1A</th> <th>124 to 105</th> </tr> </thead> <tbody> <tr> <td>GRM185</td> <td>B3/R6</td> <td>1C/1A</td> <td>105</td> </tr> <tr> <td>GRM185</td> <td>C8/D7</td> <td>1A</td> <td>105</td> </tr> <tr> <td>GRM188</td> <td>B3/R6</td> <td>1C/1A</td> <td>225</td> </tr> <tr> <td>GRM188</td> <td>R7/C8</td> <td>1A</td> <td>225</td> </tr> <tr> <td>GRM188</td> <td>B3/R6</td> <td>1A</td> <td>335</td> </tr> <tr> <td>GRM219</td> <td>B3/R6</td> <td>1C/1A</td> <td>475, 106</td> </tr> <tr> <td>GRM219</td> <td>C8</td> <td>1A</td> <td>475</td> </tr> <tr> <td>GRM21B</td> <td>B3/R6</td> <td>1C/1A</td> <td>106</td> </tr> <tr> <td>GRM21B</td> <td>R7/C8</td> <td>1A</td> <td>106</td> </tr> <tr> <td>GRM319</td> <td>B3/R6</td> <td>1C/1A</td> <td>106</td> </tr> </tbody> </table> | GRM155 | B3/R6 | 1A | 124 to 105 | GRM185 | B3/R6 | 1C/1A | 105 | GRM185 | C8/D7 | 1A | 105 | GRM188 | B3/R6 | 1C/1A | 225 | GRM188 | R7/C8 | 1A | 225 | GRM188 | B3/R6 | 1A | 335 | GRM219 | B3/R6 | 1C/1A | 475, 106 | GRM219 | C8 | 1A | 475 | GRM21B | B3/R6 | 1C/1A | 106 | GRM21B | R7/C8 | 1A | 106 | GRM319 | B3/R6 | 1C/1A | 106 | The capacitance/D.F. should be measured at reference temperature at the measuring frequency and voltage shown in the table. <table border="1"> <thead> <tr> <th>Nominal Capacitance</th> <th>Measuring Frequency</th> <th>Measuring Voltage</th> </tr> </thead> <tbody> <tr> <td>C ≤ 10μF (10V min.)*</td> <td>1±0.1kHz</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>C ≤ 10μF (6.3V max.)</td> <td>1±0.1kHz</td> <td>0.5±0.1Vrms</td> </tr> <tr> <td>C > 10μF</td> <td>120±24Hz</td> <td>0.5±0.1Vrms</td> </tr> </tbody> </table> *For items in Table1 | Nominal Capacitance | Measuring Frequency | Measuring Voltage | C ≤ 10μF (10V min.)* | 1±0.1kHz | 1.0±0.2Vrms | C ≤ 10μF (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | C > 10μF | 120±24Hz | 0.5±0.1Vrms |
| GRM155 | B3/R6 | 1A | 124 to 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM185 | B3/R6 | 1C/1A | 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM185 | C8/D7 | 1A | 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM188 | B3/R6 | 1C/1A | 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM188 | R7/C8 | 1A | 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM188 | B3/R6 | 1A | 335 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM219 | B3/R6 | 1C/1A | 475, 106 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM219 | C8 | 1A | 475 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21B | B3/R6 | 1C/1A | 106 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21B | R7/C8 | 1A | 106 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM319 | B3/R6 | 1C/1A | 106 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nominal Capacitance | Measuring Frequency | Measuring Voltage | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C ≤ 10μF (10V min.)* | 1±0.1kHz | 1.0±0.2Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C ≤ 10μF (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C > 10μF | 120±24Hz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | B1, B3, R1, R6*, R7*, C7, C8, E7, D7: 0.1 max. C6: 0.125 max. D8: 0.15 max. F1, F5: 0.2 max. *GRM31CR71E106: 0.125 max. GRM31CR6 0J/0G 107: 0.15 max. | GRM188C80E106: Perform a heat treatment at 150+0/-10°C for one hour and then set for 24±2 hours at room temperature. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias | The capacitance change should be measured after 5 min. at each specified temp. stage. The ranges of capacitance change compared with the reference temperature value over the temperature ranges shown in the table should be within the specified ranges.* In case of applying voltage, the capacitance change should be measured after 1 more min. with applying voltage in equilibration of each temp. stage. *GRM32DR60J226, GRM43 B1/B3/R6 0J/1A 336/476 only: 1.0±0.2Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50% of the Rated Voltage | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Step | Temperature (°C) | Applying Voltage (V) | |
|------|--|----------------------|--------------------------|
| 1 | 25±2 (for R6, R7, C6, C7, C8, D7, D8, E7, F5) 20±2 (for B1, B3, F1, R1) | No bias | |
| | -55±3 (for R1, R6, R7, C6, C7, C8, D7, D8, E7) -30±3 (for F5) -25±3 (for B1, B3, F1) | | |
| 3 | 25±2 (for R6, R7, C6, C7, C8, D7, D8, E7, F5) 20±2 (for B1, B3, F1, R1) | | |
| | 125±3 (for R1, R7, C7, D7, E7) 105±3 (for C8, D8) 85±3 (for B1, B3, F1, F5, R6, C6) | | |
| 5 | 20±2 (for B1, F1, R1) | | |
| 6 | -55±3 (for R1) -25±3 (for B1, F1) | | 50% of the rated voltage |
| | 20±2 (for B1, F1, R1) | | |
| 8 | 125±3 (for R1) 85±3 (for B1, F1) | | |

*Initial measurement for high dielectric constant type
 Perform a heat treatment at 150 +0/-10°C for one hour and then set for 24±2 hours at room temperature.
 Perform the initial measurement.

Continued on the following page.

GRM Series Specifications and Test Methods (2) (Note1) Typical Inspection




(Note1) This Specifications and Test Methods indicates typical inspection.

Please refer to individual specifications (our product specifications or the approval sheet).

In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).

In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.
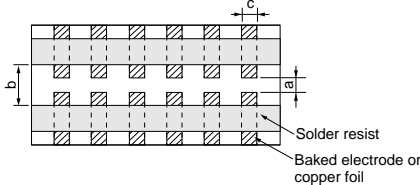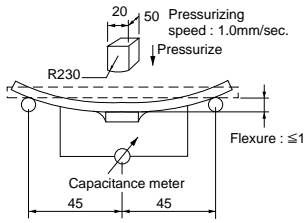
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|----------------------------------|--|--|------|---|---|---|-------|-----|------|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|------|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|-------|-----|-----|-----|
| 10 | Adhesive Strength of Termination | <p>No removal of the terminations or other defects should occur.</p>  <p>Fig. 1a</p> | <p>Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 1a using an eutectic solder. Then apply 10N* force in parallel with the test jig for 10±1sec.</p> <p>The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <p>*1N: GRM02, 2N: GRM03, 5N: GRM15/GRM18</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GRM02</td> <td>0.2</td> <td>0.56</td> <td>0.23</td> </tr> <tr> <td>GRM03</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>GRM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>GRM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GRM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>GRM31</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>GRM32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>GRM43</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>GRM55</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> | Type | a | b | c | GRM02 | 0.2 | 0.56 | 0.23 | GRM03 | 0.3 | 0.9 | 0.3 | GRM15 | 0.4 | 1.5 | 0.5 | GRM18 | 1.0 | 3.0 | 1.2 | GRM21 | 1.2 | 4.0 | 1.65 | GRM31 | 2.2 | 5.0 | 2.0 | GRM32 | 2.2 | 5.0 | 2.9 | GRM43 | 3.5 | 7.0 | 3.7 | GRM55 | 4.5 | 8.0 | 5.6 |
| Type | a | b | c | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM02 | 0.2 | 0.56 | 0.23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM03 | 0.3 | 0.9 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM15 | 0.4 | 1.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM31 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM43 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM55 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Vibration | <p>Appearance: No defects or abnormalities</p> <p>Capacitance: Within the specified tolerance</p> <p>D.F.: B1, B3, R1, R6*, R7*, C7, C8, E7, D7: 0.1 max. C6: 0.125 max. D8: 0.15 max. F1, F5: 0.2 max. *GRM31CR71E106: 0.125 max. GRM31CR6 0J/0G 107: 0.15 max.</p> | <p>Solder the capacitor on the test jig (glass epoxy board) in the same manner and under the same conditions as (10).</p> <p>The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours).</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Deflection | <p>Appearance: No marking defects</p> <p>Capacitance Change: Within ±10%</p>  <p>Fig.3a</p> | <p>Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2a using an eutectic solder. Then apply a force in the direction shown in Fig. 3a for 5±1 sec. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p>  <p>Fig. 2a</p> <p>(GRM02/03/15: t: 0.8mm)</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GRM02</td> <td>0.2</td> <td>0.56</td> <td>0.23</td> </tr> <tr> <td>GRM03</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>GRM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> <tr> <td>GRM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GRM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>GRM31</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>GRM32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>GRM43</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>GRM55</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> <p>(in mm)</p> | Type | a | b | c | GRM02 | 0.2 | 0.56 | 0.23 | GRM03 | 0.3 | 0.9 | 0.3 | GRM15 | 0.4 | 1.5 | 0.5 | GRM18 | 1.0 | 3.0 | 1.2 | GRM21 | 1.2 | 4.0 | 1.65 | GRM31 | 2.2 | 5.0 | 2.0 | GRM32 | 2.2 | 5.0 | 2.9 | GRM43 | 3.5 | 7.0 | 3.7 | GRM55 | 4.5 | 8.0 | 5.6 |
| Type | a | b | c | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM02 | 0.2 | 0.56 | 0.23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM03 | 0.3 | 0.9 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM15 | 0.4 | 1.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM31 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM43 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GRM55 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations is to be soldered evenly and continuously. | <p>Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in an eutectic solder solution for 2±0.5 seconds at 230±5°C or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued on the following page. ↗

GRM Series Specifications and Test Methods (2) (Note1) Typical Inspection

1

(Note1) This Specifications and Test Methods indicates typical inspection. Please refer to individual specifications (our product specifications or the approval sheet).
 In case Non "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GRM Series Specifications and Test Methods (2).

Continued from the preceding page.


| No. | Item | Specifications | Test Method |
|-----|---------------------|---|---|
| 14 | Appearance | No defects or abnormalities | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in an eutectic solder* or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Set at room temperature for 24±2 hours, then measure. *Do not apply to GRM02. •Initial measurement for high dielectric constant type Perform a heat treatment at 150+0/-10°C for one hour and then set at room temperature for 24±2 hours. Perform the initial measurement. *Preheating for GRM32/43/55 |
| | Capacitance Change | B1, B3, R1, R6*, R7, C6, C7, C8*, E7, D7, D8: Within ±7.5% F1, F5: Within ±20% *GRM188R6 0J/0G 106, GRM188C80E106, GRM219R60G226: within ±12.5% GRM155R60G475: Within ±15% | |
| | D.F. | B1, B3, R1, R6*, R7*, C7, C8, E7, D7: 0.1 max. C6: 0.125 max. D8: 0.15 max. F1, F5: 0.2 max. *GRM31CR71E106: 0.125 max. GRM31CR6 0J/0G 107: 0.15 max. | |
| | I.R. | More than 50Ω · F | |
| | Dielectric Strength | No defects | |
| 15 | Appearance | No defects or abnormalities | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments shown in the following table. Set for 24±2 hours at room temperature, then measure. |
| | Capacitance Change | B1, B3, R1, R6, R7, C6, C7, C8, D7, D8: Within ±7.5% E7: Within ±30% F1, F5: Within ±20% | |
| | D.F. | B1, B3, R1, R6*, R7*, C7, C8, E7, D7: 0.1 max. C6: 0.125 max. D8: 0.15 max. F1, F5: 0.2 max. *GRM31CR71E106: 0.125 max. GRM31CR6 0J/0G 107: 0.15 max. | |
| | I.R. | More than 50Ω · F | |
| | Dielectric Strength | No defects | |
| 16 | Appearance | No defects or abnormalities | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. The charge/discharge current is less than 50mA. •Initial measurement Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. •Measurement after test Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure. |
| | Capacitance Change | B1, B3, R1, R6, R7, C6, C7, C8, E7, D7, D8: Within ±12.5% F1, F5: Within ±30% | |
| | D.F. | B1, B3, R1, R6, R7, C6, C7, C8, E7, D7, D8: 0.2 max. F1, F5: 0.4 max. | |
| | I.R. | More than 12.5Ω · F | |
| 17 | Appearance | No defects or abnormalities | Apply 150% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. •Initial measurement Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. •Measurement after test Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure. |
| | Capacitance Change | B1, B3, R1, R6*, R7, C6, C7, C8*, E7, D7, D8: Within ±12.5% F1, F5: Within ±30% *GRM188C80E106, GRM219R60G226: within ±15% | |
| | D.F. | B1, B3, R1, R6, R7, C6, C7, C8, E7, D7, D8: 0.2 max. F1, F5: 0.4 max. | |
| | I.R. | More than 25Ω · F | |

| Step | Temperature | Time |
|------|--------------|--------|
| 1 | 100 to 120°C | 1 min. |
| 2 | 170 to 200°C | 1 min. |


| Step | 1 | 2 | 3 | 4 |
|-------------|----------------------------|------------|----------------------------|------------|
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. |
| Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |

GRM Series Data

■ Capacitance - Temperature Characteristics

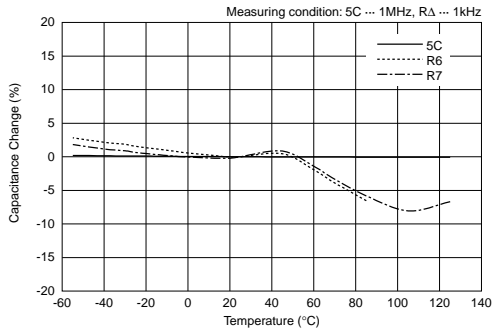


■ Capacitance Change - Aging

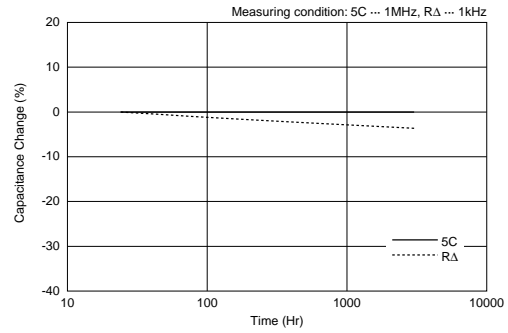


■ Impedance - Frequency Characteristics


5C: GRM15

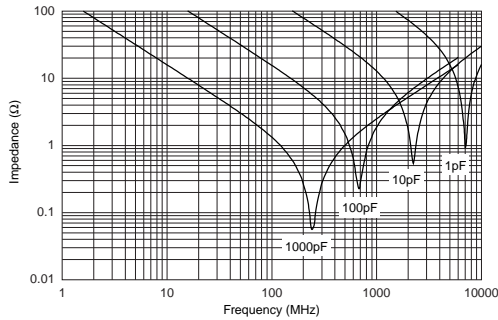

RΔ: GRM15

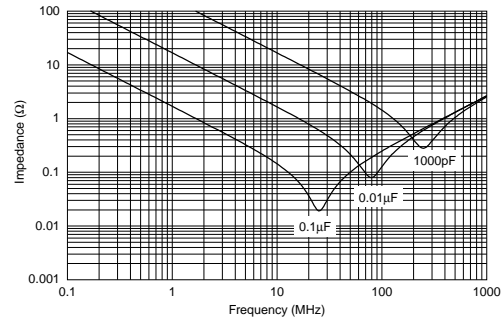

RΔ

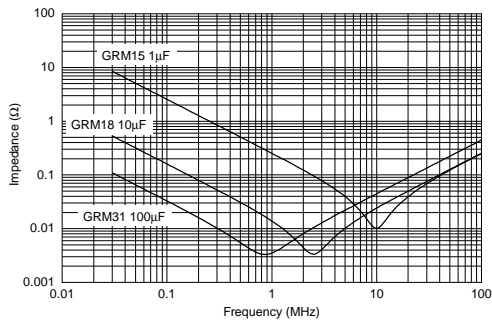

The data herein are given in typical values, not guaranteed ratings.
 Please refer to our Web site or contact our sales representatives for individual Part Number's data.
 Our Web Site: http://www.murata.com/products/capacitor/tech_data/index.html


Continued on the following page.

GRM Series Data


Continued from the preceding page.

Capacitance - DC Voltage Characteristics


Temperature Compensating Type: GRM1555C1H102JA01

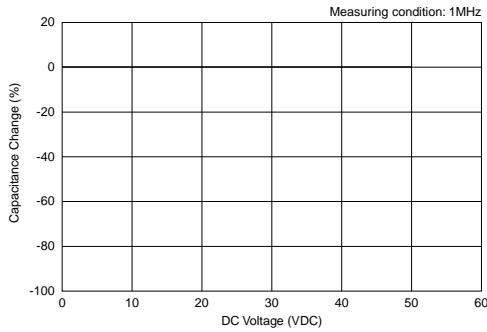


High Dielectric Constant Type: GRM155R71E103KA01

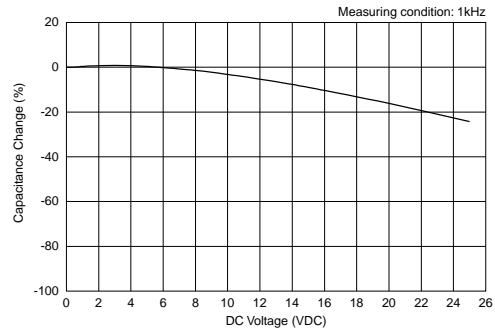


High Dielectric Constant Type: GRM155R71C104KA88

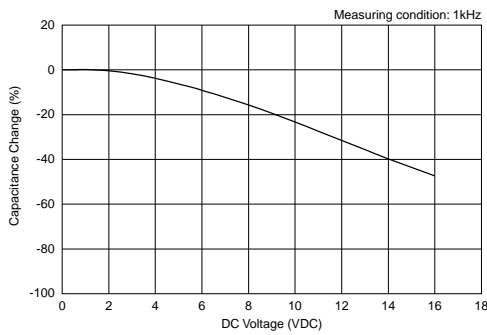


High Dielectric Constant Type: GRM155R61A105KE15

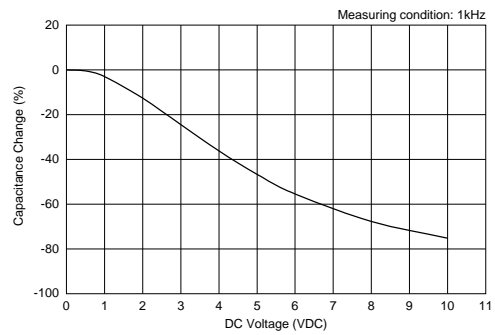

High Dielectric Constant Type: GRM188R60J106ME47

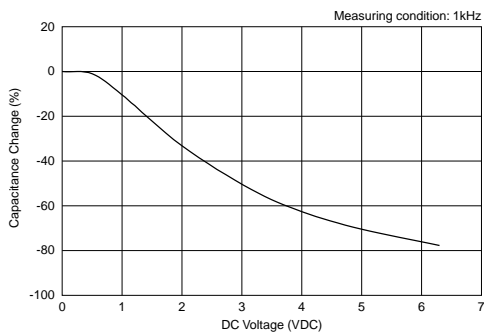

High Dielectric Constant Type: GRM31CR60J107ME39

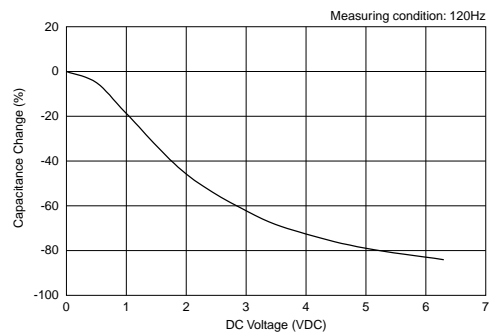

The data herein are given in typical values, not guaranteed ratings.
 Please refer to our Web site or contact our sales representatives for individual Part Number's data.
 Our Web Site: http://www.murata.com/products/capacitor/tech_data/index.html


Continued on the following page. ↗

GRM Series Data


Continued from the preceding page.

Capacitance - AC Voltage Characteristics


Temperature Compensating Type: GRM1555C1H102JA01

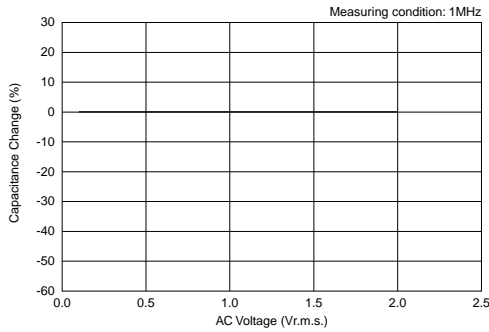


High Dielectric Constant Type: GRM155R71E103KA01

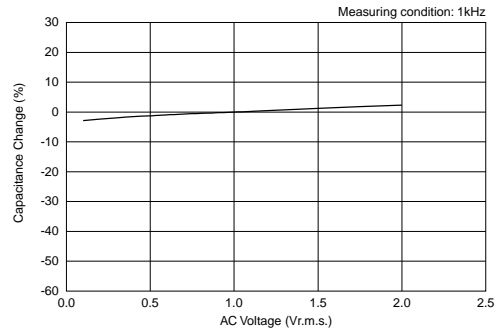


High Dielectric Constant Type: GRM155R71C104KA88

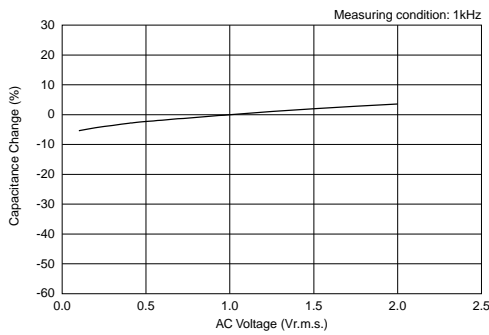


High Dielectric Constant Type: GRM155R61A105KE15

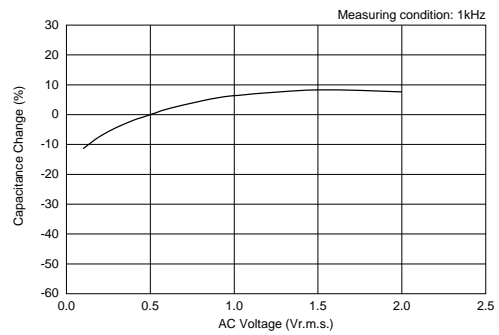

High Dielectric Constant Type: GRM188R60J106ME47

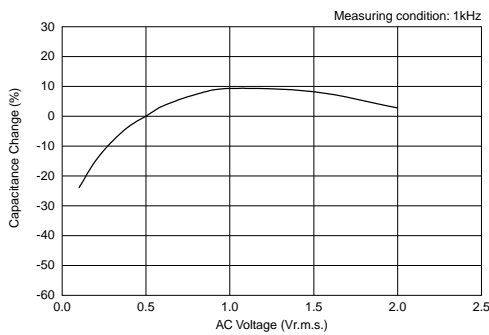

High Dielectric Constant Type: GRM31CR60J107ME39

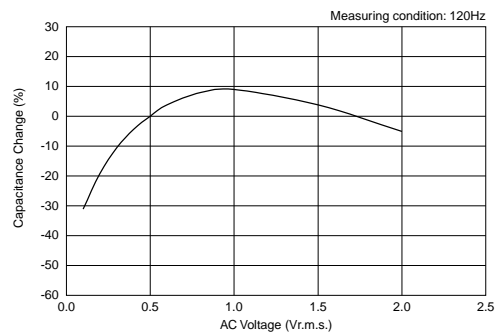

The data herein are given in typical values, not guaranteed ratings.
 Please refer to our Web site or contact our sales representatives for individual Part Number's data.
 Our Web Site: http://www.murata.com/products/capacitor/tech_data/index.html

Chip Monolithic Ceramic Capacitors





Capacitor Array GNM Series

■ Features



1. High density mounting due to mounting space saving
2. Mounting cost saving

■ Applications

General electronic equipment

| Part Number | Dimensions (mm) | | | |
|---------------|-----------------|------------|-----------------|------------|
| | L | W | T | P |
| GNM0M2 | 0.9 ±0.05 | 0.6 ±0.05 | 0.45 ±0.05 | 0.45 ±0.05 |
| GNM1M2 | 1.37 ±0.15 | 1.0 ±0.15 | 0.5 +0.05/-0.10 | 0.64 ±0.05 |
| | | | 0.6 ±0.1 | |
| | | | 0.8 +0/-0.15 | |
| GNM212 | 2.0 ±0.15 | 1.25 ±0.15 | 0.6 ±0.1 | 1.0 ±0.1 |
| | | | 0.85 ±0.1 | |

| Part Number | Dimensions (mm) | | | |
|---------------|-----------------|------------|----------------|-----------|
| | L | W | T | P |
| GNM214 | 2.0 ±0.15 | 1.25 ±0.15 | 0.5 +0.05/-0.1 | 0.5 ±0.05 |
| | | | 0.6 ±0.1 | |
| | | | 0.85 ±0.1 | |
| GNM314 | 3.2 ±0.15 | 1.6 ±0.15 | 0.8 ±0.1 | 0.8 ±0.1 |
| | | | 0.85 ±0.1 | |
| | | | 1.0 ±0.1 | |
| | | | 1.15 ±0.1 | |

Capacitance Table

Temperature Compensating Type C0G(5C) Characteristics

0.6 ex.0.6: T Dimension [mm]

| Capacitance | LxW [mm] | T Dimension [mm] | | | |
|-------------|---------------------|----------------------------|----------------------------|---------------------------|---------|
| | | 1M (1) | 21 (2) | 31 (3) | 31 (3) |
| | | 1.37x1.0 (1M) <0504> | 2.0x1.25 (21) <0805> | 3.2x1.6 (31) <1206> | |
| | Number of Elements | 2(2) | | 4(4) | |
| | Rated Voltage [Vdc] | 50 (1H) | 50 (1H) | 100 (2A) | 50 (1H) |
| | 10pF(100) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 15pF(150) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 22pF(220) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 33pF(330) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 47pF(470) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 68pF(680) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 100pF(101) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 150pF(151) | 0.6 | 0.6 | 0.8 | 0.8 |
| | 220pF(221) | 0.6 | 0.6 | | 0.8 |
| | 330pF(331) | | | | 0.8 |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Continued on the following page. ↗

Capacitance Table

Continued from the preceding page.

2

High Dielectric Constant Type X7R(R7)/X7S(C7) Characteristics

| | | 0.6 ex.0.6: T Dimension [mm] | | | | | | | | | | | |
|---------------------|--------------------|------------------------------|----------|----------|----------|----------|----------------------|----------|----------|---------------------|----------|----------|--|
| LxW [mm] | Number of Elements | 1.37x1.0 (1M) <0504> | | | | | 2.0x1.25 (21) <0805> | | | 3.2x1.6 (31) <1206> | | | |
| | | 2(2) | | | | | 4(4) | | | | | | |
| Rated Voltage [Vdc] | | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 50 (1H) | 25 (1E) | 16 (1C) | 50 (1H) | 25 (1E) | 16 (1C) | 6.3 (0J) | |
| TC | | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | |
| 470pF(471) | | | | | | | 0.6 | | | | | | |
| 1000pF(102) | 0.6 | | | | | | 0.6 | | | | | | |
| 2200pF(222) | | | 0.6 | | | | | 0.6 | | | | | |
| 4700pF(472) | | | 0.6 | | | | | 0.6 | | | | | |
| 10000pF(103) | | | 0.6 | | | | | 0.6 | | | | | |
| 22000pF(223) | | | | 0.6 | 0.6 | | | | 0.85 | | | | |
| 47000pF(473) | | | | 0.6 | 0.6 | | | | 0.85 | 0.85 | | 1.0 | |
| 0.10μF(104) | | | | 0.6 | | 0.6 | | | 0.85 | 0.85 | 0.85 | 1.0 | |
| 1.0μF(105) | | | | | | | | | | | | 1.15 | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X5R(R6) Characteristics

| | | 0.6 ex.0.6: T Dimension [mm] | | | | | | | | | | | | | | | |
|---------------------|--------------------|------------------------------|----------|----------|----------|----------------------|----------|----------|----------|----------|----------------------|----------|----------|----------------------|----------|---------------------|----------|
| LxW [mm] | Number of Elements | 0.9x0.6 (0M) <0302> | | | | 1.37x1.0 (1M) <0504> | | | | | 2.0x1.25 (21) <0805> | | | 2.0x1.25 (21) <0805> | | 3.2x1.6 (31) <1206> | |
| | | 2(2) | | | | 4(4) | | | | | | | | | | | |
| Rated Voltage [Vdc] | | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 16 (1C) | 10 (1A) | 6.3 (0J) | 10 (1A) | 6.3 (0J) | 16 (1C) | 10 (1A) |
| TC | | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) | X5R (R6) |
| 1000pF(102) | | | | | | 0.6 | | | | | | | | | | | |
| 2200pF(222) | | | | | | | 0.6 | | | | | | | | | | |
| 4700pF(472) | | | | | | | 0.6 | | | | | | | | | | |
| 10000pF(103) | 0.45 | 0.45 | 0.45 | | | | 0.6 | | | | | | | | | | |
| 22000pF(223) | 0.45 | 0.45 | 0.45 | | | | | 0.6 | 0.6 | | | | | | | | |
| 47000pF(473) | 0.45 | 0.45 | 0.45 | | | | | 0.6 | 0.6 | | | | | | | | |
| 0.10μF(104) | 0.45 | 0.45 | 0.45 | | | | | | 0.6 | | | | | | | | |
| 0.22μF(224) | | | | | | | | | 0.8 | | | | | | | | |
| 0.47μF(474) | | | | | | | | | | | | 0.85 | | | | | |
| 1.0μF(105) | | | | | 0.45 | | | 0.8 | 0.8 | 0.8 | 0.85 | 0.85 | | 0.85 | 0.85 | 0.85 | 0.85 |
| 2.2μF(225) | | | | | | | | 0.8 | 0.8 | | | 0.85 | 0.85 | | 0.85 | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7) Characteristics Low Profile

| | | 0.5 ex.0.5: T Dimension [mm] | |
|---------------------|--------------------|------------------------------|----------------------|
| LxW [mm] | Number of Elements | 1.37x1.0 (1M) <0504> | 2.0x1.25 (21) <0805> |
| | | 2(2) | 4(4) |
| Rated Voltage [Vdc] | | 16 (1C) | 16 (1C) |
| TC | | X7R (R7) | X7R (R7) |
| 0.10μF(104) | | 0.5 | 0.5 |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X5R(R6) Characteristics Low Profile

| | | 0.5 ex.0.5: T Dimension [mm] | | |
|---------------------|--------------------|------------------------------|----------------------|----------|
| LxW [mm] | Number of Elements | 1.37x1.0 (1M) <0504> | 2.0x1.25 (21) <0805> | |
| | | 2(2) | 4(4) | 4(4) |
| Rated Voltage [Vdc] | | 16 (1C) | 10 (1A) | 16 (1C) |
| TC | | X5R (R6) | X5R (R6) | X5R (R6) |
| 1.0μF(105) | | 0.5 | 0.5 | 0.5 |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.37x1.0(1M)<0504> | | 2.0x1.25(21)<0805> | | 3.2x1.6(31)<1206> | |
|-------------------|---------|--------------------|--------------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 50(1H) | | 50(1H) | | 100(2A) | |
| Capacitance | | Tolerance | | Part Number | | | |
| 10pF(100) | ±10%(K) | GNM1M25C1H100KD01D | GNM2145C1H100KD01D | GNM3145C2A100KD01D | GNM3145C1H100KD01D | | |
| 15pF(150) | ±10%(K) | GNM1M25C1H150KD01D | GNM2145C1H150KD01D | GNM3145C2A150KD01D | GNM3145C1H150KD01D | | |
| 22pF(220) | ±10%(K) | GNM1M25C1H220KD01D | GNM2145C1H220KD01D | GNM3145C2A220KD01D | GNM3145C1H220KD01D | | |
| 33pF(330) | ±10%(K) | GNM1M25C1H330KD01D | GNM2145C1H330KD01D | GNM3145C2A330KD01D | GNM3145C1H330KD01D | | |
| 47pF(470) | ±10%(K) | GNM1M25C1H470KD01D | GNM2145C1H470KD01D | GNM3145C2A470KD01D | GNM3145C1H470KD01D | | |
| 68pF(680) | ±10%(K) | GNM1M25C1H680KD01D | GNM2145C1H680KD01D | GNM3145C2A680KD01D | GNM3145C1H680KD01D | | |
| 100pF(101) | ±10%(K) | GNM1M25C1H101KD01D | GNM2145C1H101KD01D | GNM3145C2A101KD01D | GNM3145C1H101KD01D | | |
| 150pF(151) | ±10%(K) | GNM1M25C1H151KD01D | GNM2145C1H151KD01D | GNM3145C2A151KD01D | GNM3145C1H151KD01D | | |
| 220pF(221) | ±10%(K) | GNM1M25C1H221KD01D | GNM2145C1H221KD01D | | GNM3145C1H221KD01D | | |
| 330pF(331) | ±10%(K) | | | | GNM3145C1H331KD01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7)/X7S(C7) Characteristics

| LxW [mm] | | 1.37x1.0(1M)<0504> | | | |
|--------------------|---------|--------------------|--|--------------------|--------------------|
| Number of Elements | | 2(2) | | | |
| Rated Volt. [Vdc] | | 50(1H) | | 25(1E) | |
| Capacitance | | Tolerance | | Part Number | |
| 1000pF(102) | ±20%(M) | GNM1M2R71H102MA01D | | | |
| 2200pF(222) | ±20%(M) | | | GNM1M2R71E222MA01D | |
| 4700pF(472) | ±20%(M) | | | GNM1M2R71E472MA01D | |
| 10000pF(103) | ±20%(M) | | | GNM1M2R71E103MA01D | |
| 22000pF(223) | ±20%(M) | | | GNM1M2R71C223MA01D | GNM1M2R71A223MA01D |
| 47000pF(473) | ±20%(M) | | | GNM1M2R71C473MA01D | GNM1M2R71A473MA01D |
| 0.10μF(104) | ±20%(M) | | | GNM1M2R71C104MA01D | GNM1M2C71A104MA01D |

| LxW [mm] | | 2.0x1.25(21)<0805> | | |
|--------------------|---------|--------------------|--|--------------------|
| Number of Elements | | 4(4) | | |
| Rated Volt. [Vdc] | | 50(1H) | | 16(1C) |
| Capacitance | | Tolerance | | Part Number |
| 470pF(471) | ±20%(M) | GNM214R71H471MA01D | | |
| 1000pF(102) | ±20%(M) | GNM214R71H102MA01D | | |
| 2200pF(222) | ±20%(M) | | | GNM214R71E222MA01D |
| 4700pF(472) | ±20%(M) | | | GNM214R71E472MA01D |
| 10000pF(103) | ±20%(M) | | | GNM214R71E103MA01D |
| 22000pF(223) | ±20%(M) | | | GNM214R71C223MA01D |
| 47000pF(473) | ±20%(M) | | | GNM214R71C473MA01D |
| 0.10μF(104) | ±20%(M) | | | GNM214R71C104MA01D |

| LxW [mm] | | 3.2x1.6(31)<1206> | | | |
|--------------------|---------|--------------------|--|--------------------|--|
| Number of Elements | | 4(4) | | | |
| Rated Volt. [Vdc] | | 50(1H) | | 25(1E) | |
| Capacitance | | Tolerance | | Part Number | |
| 47000pF(473) | ±20%(M) | GNM314R71H473MA11D | | GNM314R71C473MA01L | |
| 0.10μF(104) | ±20%(M) | GNM314R71H104MA11D | | GNM314R71C104MA01L | |
| 1.0μF(105) | ±20%(M) | | | GNM314R70J105MA01L | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GNM series Specifications and Test Method(2).

(Part Number) **GN** **M** **1M** **2** **5C** **1H** **100** **K** **D01** **D** ①Product ID ②Series ③Dimension (LxW) ④Number of Elements
 ⑤Temperature Characteristics ⑥Rated Voltage ⑦Capacitance
 ⑧Capacitance Tolerance ⑨Individual Specification Code ⑩Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X5R(R6) Characteristics

2

| | | | | | |
|--------------------|-----------|---------------------|---------------------|---------------------|---------------------|
| LxW [mm] | | 0.9x0.6(0M)<0302> | | | |
| Number of Elements | | 2(2) | | | |
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | GNM0M2R61C103ME18D* | GNM0M2R61A103ME17D* | GNM0M2R60J103ME17D* | |
| 22000pF(223) | ±20%(M) | GNM0M2R61C223ME18D* | GNM0M2R61A223ME17D* | GNM0M2R60J223ME17D* | |
| 47000pF(473) | ±20%(M) | GNM0M2R61C473ME18D* | GNM0M2R61A473ME17D* | GNM0M2R60J473ME17D* | |
| 0.10μF(104) | ±20%(M) | GNM0M2R61C104ME18D* | GNM0M2R61A104ME17D* | GNM0M2R60J104ME17D* | |
| 1.0μF(105) | ±20%(M) | | | | GNM0M2R60G105ME17D* |

| | | | | |
|--------------------|-----------|--------------------|--------------------|---------------------|
| LxW [mm] | | 1.37x1.0(1M)<0504> | | |
| Number of Elements | | 2(2) | | |
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | |
| 1000pF(102) | ±20%(M) | GNM1M2R61H102MA01D | | |
| 2200pF(222) | ±20%(M) | | GNM1M2R61E222MA01D | |
| 4700pF(472) | ±20%(M) | | GNM1M2R61E472MA01D | |
| 10000pF(103) | ±20%(M) | | GNM1M2R61E103MA01D | |
| 22000pF(223) | ±20%(M) | | | GNM1M2R61C223MA01D |
| 47000pF(473) | ±20%(M) | | | GNM1M2R61C473MA01D |
| 0.22μF(224) | ±20%(M) | | | GNM1M2R61C224ME18D* |
| 1.0μF(105) | ±20%(M) | | | GNM1M2R61C105ME18D* |

| | | | | |
|--------------------|-----------|---------------------|---------------------|--|
| LxW [mm] | | 1.37x1.0(1M)<0504> | | |
| Number of Elements | | 2(2) | | |
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) | |
| Capacitance | Tolerance | Part Number | | |
| 22000pF(223) | ±20%(M) | GNM1M2R61A223MA01D | | |
| 47000pF(473) | ±20%(M) | GNM1M2R61A473MA01D | | |
| 0.10μF(104) | ±20%(M) | GNM1M2R61A104MA01D | | |
| 1.0μF(105) | ±20%(M) | GNM1M2R61A105ME17D* | GNM1M2R60J105ME12D* | |
| 2.2μF(225) | ±20%(M) | GNM1M2R61A225ME18D* | GNM1M2R60J225ME18D* | |

| | | | | |
|--------------------|-----------|--------------------|---------------------|---------------------|
| LxW [mm] | | 2.0x1.25(21)<0805> | | |
| Number of Elements | | 2(2) | | |
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 0.47μF(474) | ±20%(M) | GNM212R61C474MA16D | | |
| 1.0μF(105) | ±20%(M) | GNM212R61C105MA16D | GNM212R61A105MA13D | |
| 2.2μF(225) | ±20%(M) | | GNM212R61A225ME16D* | GNM212R60J225ME16D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GNM series Specifications and Test Method(2).

(Part Number) **GN** **M** **0M** **2** **R6** **1C** **103** **M** **E18** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics ⑥ Rated Voltage ⑦ Capacitance
 ⑧ Capacitance Tolerance ⑨ Individual Specification Code ⑩ Packaging

Packaging Code in Part Number is a code shows STD Tray.

High Dielectric Constant Type X5R(R6) Characteristics

| | | | |
|--------------------|-----------|---------------------|---------------------|
| LxW [mm] | | 2.0x1.25(21)<0805> | |
| Number of Elements | | 4(4) | |
| Rated Volt. [Vdc] | | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±20%(M) | GNM214R61A105ME17D* | GNM214R60J105ME17D* |
| 2.2μF(225) | ±20%(M) | | GNM214R60J225ME18D* |

| | | | |
|--------------------|-----------|--------------------|--------------------|
| LxW [mm] | | 3.2x1.6(31)<1206> | |
| Number of Elements | | 4(4) | |
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±20%(M) | GNM314R61C105MA15D | GNM314R61A105MA13D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GNM series Specifications and Test Method(2).

High Dielectric Constant Type X7R(R7) Characteristics Low Profile

| | | | |
|--------------------|-----------|--------------------|--------------------|
| LxW [mm] | | 1.37x1.0(1M)<0504> | 2.0x1.25(21)<0805> |
| Number of Elements | | 2(2) | 4(4) |
| Rated Volt. [Vdc] | | 16(1C) | 16(1C) |
| Capacitance | Tolerance | Part Number | |
| 0.10μF(104) | ±20%(M) | GNM1M2R71C104MAA1D | GNM214R71C104MAA1D |

High Dielectric Constant Type X5R(R6) Characteristics Low Profile

| | | | |
|--------------------|-----------|---------------------|---------------------|
| LxW [mm] | | 1.37x1.0(1M)<0504> | |
| Number of Elements | | 2(2) | |
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±20%(M) | GNM1M2R61C105MEA2D* | GNM1M2R61A105MEA4D* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GNM series Specifications and Test Method(2).

GNM Series Specifications and Test Methods (1)

In case Non "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

2

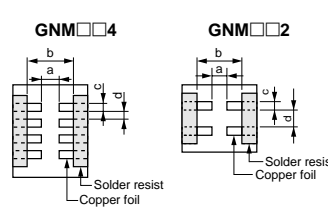
| No. | Item | Specifications | | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------|--|--|---|---|-------------|-----------------|-------------|------|-----------------|------------|-------------|------------|----------------|---|--------|-----------------|-------------|---|------|------------------|-----------|----------|----------|--------------------------------------|--------------|-------------|-----|-------------------------------------|-----|------|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Operating Temperature Range | 5C: -55 to +125°C | R7, C7: -55 to +125°C R6: -55 to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | | Visual inspection | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions | | Using calipers | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | | No failure should be observed when 300% of the rated voltage (5C) or 250% of the rated voltage (R7) is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 2 minutes of charging. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | | The capacitance/Q/D.F. should be measured at 25°C at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Q/ Dissipation Factor (D.F.) | 30pF min.: $Q \geq 1000$ 30pF max.: $Q \geq 400+20C$ C: Nominal Capacitance (pF) | <table border="1"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V</th> <th>6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.025 max.</td> <td>0.035 max.</td> <td>0.035 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | Char. | 25V min. | 16V | 10V | 6.3V | R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | <table border="1"> <thead> <tr> <th>Char.</th> <th>5C</th> <th>R7</th> </tr> </thead> <tbody> <tr> <td>Item</td> <td></td> <td></td> </tr> <tr> <td>Frequency</td> <td>1±0.1MHz</td> <td>1±0.1kHz</td> </tr> <tr> <td>Voltage</td> <td>0.5 to 5Vrms</td> <td>1.0±0.2Vrms</td> </tr> </tbody> </table> | Char. | 5C | R7 | Item | | | Frequency | 1±0.1MHz | 1±0.1kHz | Voltage | 0.5 to 5Vrms | 1.0±0.2Vrms | | | | |
| | | | Char. | 25V min. | 16V | 10V | 6.3V | | | | | | | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Char. | 5C | R7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency | 1±0.1MHz | 1±0.1kHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Voltage | 0.5 to 5Vrms | 1.0±0.2Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | Capacitance Change | <table border="1"> <thead> <tr> <th>Char.</th> <th>Temp. Range</th> <th>Reference Temp.</th> <th>Cap. Change</th> </tr> </thead> <tbody> <tr> <td>R7</td> <td>-55°C to +125°C</td> <td rowspan="3">25°C</td> <td>Within ±15%</td> </tr> <tr> <td>R6</td> <td>-55°C to +85°C</td> <td></td> </tr> <tr> <td>C7</td> <td>-55°C to +125°C</td> <td>Within ±22%</td> </tr> </tbody> </table> | Char. | Temp. Range | Reference Temp. | Cap. Change | R7 | -55°C to +125°C | 25°C | Within ±15% | R6 | -55°C to +85°C | | C7 | -55°C to +125°C | Within ±22% | The capacitance change should be measured after 5 min. at each specified temperature stage. (1) Temperature Compensating Type The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step1 through 5, the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in the steps 1, 3 and 5 by the cap. value in step 3. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3 (for 5C/R7/C7), -30±3 (for F5)</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>125±3 (for 5C/R7/C7), 85±3 (for F5)</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> (2) High Dielectric Constant Type The ranges of capacitance change compared with the above 25°C value over the temperature ranges shown in the table should be within the specified ranges. | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 (for 5C/R7/C7), -30±3 (for F5) | 3 | 25±2 | 4 | 125±3 (for 5C/R7/C7), 85±3 (for F5) | 5 | 25±2 |
| | | Char. | Temp. Range | Reference Temp. | Cap. Change | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | R7 | -55°C to +125°C | 25°C | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | |
| R6 | -55°C to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C7 | -55°C to +125°C | Within ±22% | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | -55±3 (for 5C/R7/C7), -30±3 (for F5) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 125±3 (for 5C/R7/C7), 85±3 (for F5) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Temperature Coefficient | Within the specified tolerance (Table A) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Drift | Within ±0.2% or ±0.05pF (Whichever is larger.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur.  | | Solder the capacitor to the test jig (glass epoxy board) shown in Fig.1 using a eutectic solder. Then apply 5N force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>GNM1M2</td> <td>0.5</td> <td>1.6</td> <td>0.32</td> <td>0.32</td> </tr> <tr> <td>GNM212</td> <td>0.6</td> <td>1.8</td> <td>0.5</td> <td>0.5</td> </tr> <tr> <td>GNM214</td> <td>0.6</td> <td>2.0</td> <td>0.25</td> <td>0.25</td> </tr> <tr> <td>GNM314</td> <td>0.8</td> <td>2.5</td> <td>0.4</td> <td>0.4</td> </tr> </tbody> </table> (in mm) | Type | a | b | c | d | GNM1M2 | 0.5 | 1.6 | 0.32 | 0.32 | GNM212 | 0.6 | 1.8 | 0.5 | 0.5 | GNM214 | 0.6 | 2.0 | 0.25 | 0.25 | GNM314 | 0.8 | 2.5 | 0.4 | 0.4 | |
| Type | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 | 0.5 | 1.6 | 0.32 | 0.32 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 | 0.6 | 1.8 | 0.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 | 0.6 | 2.0 | 0.25 | 0.25 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM314 | 0.8 | 2.5 | 0.4 | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | |

Fig. 1

Continued on the following page. 

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

**In case Non "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).**

2

| No. | Item | Specifications | | Test Method | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|---|--|---|--|-------|----------|------|-----|------|------------|------------|------------|------------|-----------|--------|----------|----------|----------|----------|--------|----------|----------|----------|----------|--------|----------|----------|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Appearance | No defects or abnormalities | | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vibration Resistance | Q/D.F. | 30pF min.: $Q \geq 1000$ 30pF max.: $Q \geq 400+20C$ | <table border="1" style="font-size: small;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V</th> <th>6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.025 max.</td> <td>0.035 max.</td> <td>0.035 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | | Char. | 25V min. | 16V | 10V | 6.3V | R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | |
| | | Char. | 25V min. | | 16V | 10V | 6.3V | | | | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | | |
| | | C: Nominal Capacitance (pF) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Appearance | No marking defects | | Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3 for 5 ± 1 sec. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | Within $\pm 10\%$ | | | | | | | | | | | | | | | | | | | | | | | | |
| | Deflection | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>•GNM□□4</p> </div> <div style="text-align: center;"> <p>•GNM□□2</p> </div> </div> | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>GNM1M2</td> <td>2.0±0.05</td> <td>0.5±0.05</td> <td>0.32±0.05</td> <td>0.32±0.05</td> </tr> <tr> <td>GNM212</td> <td>2.0±0.05</td> <td>0.6±0.05</td> <td>0.5±0.05</td> <td>0.5±0.05</td> </tr> <tr> <td>GNM214</td> <td>2.0±0.05</td> <td>0.7±0.05</td> <td>0.3±0.05</td> <td>0.2±0.05</td> </tr> <tr> <td>GNM314</td> <td>2.5±0.05</td> <td>0.8±0.05</td> <td>0.4±0.05</td> <td>0.4±0.05</td> </tr> </tbody> </table> <p style="text-align: right;">(in mm)</p> | | Type | a | b | c | d | GNM1M2 | 2.0±0.05 | 0.5±0.05 | 0.32±0.05 | 0.32±0.05 | GNM212 | 2.0±0.05 | 0.6±0.05 | 0.5±0.05 | 0.5±0.05 | GNM214 | 2.0±0.05 | 0.7±0.05 | 0.3±0.05 | 0.2±0.05 | GNM314 | 2.5±0.05 | 0.8±0.05 |
| Type | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 | 2.0±0.05 | 0.5±0.05 | 0.32±0.05 | 0.32±0.05 | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 | 2.0±0.05 | 0.6±0.05 | 0.5±0.05 | 0.5±0.05 | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 | 2.0±0.05 | 0.7±0.05 | 0.3±0.05 | 0.2±0.05 | | | | | | | | | | | | | | | | | | | | | | | |
| GNM314 | 2.5±0.05 | 0.8±0.05 | 0.4±0.05 | 0.4±0.05 | | | | | | | | | | | | | | | | | | | | | | | |
| | | <p style="text-align: center;">Fig. 3</p> | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2 ± 0.5 seconds at $230 \pm 5^\circ\text{C}$ or Sn-3.0Ag-0.5Cu solder solution for 2 ± 0.5 seconds at $245 \pm 5^\circ\text{C}$. | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Resistance to Soldering Heat | The measured and observed characteristics should satisfy the specifications in the following table. | | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at $270 \pm 5^\circ\text{C}$ for 10 ± 0.5 seconds. Let sit at room temperature for 24 ± 2 hours, then measure. • Initial measurement for high dielectric constant type Perform a heat treatment at $150+0/-10^\circ\text{C}$ for one hour and then let sit for 24 ± 2 hours at room temperature. Perform the initial measurement. | | | | | | | | | | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger) | R7, R6, C7: Within $\pm 7.5\%$ | | | | | | | | | | | | | | | | | | | | | | | | |
| | Q/D.F. | 30pF min.: $Q \geq 1000$ 30pF max.: $Q \geq 400+20C$ | <table border="1" style="font-size: small;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V</th> <th>6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.025 max.</td> <td>0.035 max.</td> <td>0.035 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | | Char. | 25V min. | 16V | 10V | 6.3V | R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | |
| | | Char. | 25V min. | | 16V | 10V | 6.3V | | | | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | | |
| | C: Nominal Capacitance (pF) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | More than $10,000\text{M}\Omega$ or $500\Omega \cdot \text{F}$ (Whichever is smaller) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued on the following page.

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

In case Non "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

2

| No. | Item | Specifications | | | | Test Method | | | | | | | | | | | | | | | |
|---------------------|---|---|--|----------------------------|------------|---|------|------------|------------|------------|------------|------------|----------------------------|------------|----------------------------|------------|-------------|------|--------|------|--------|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | | | | | | | | | |
| 15 | Temperature Cycle | The measured and observed characteristics should satisfy the specifications in the following table. | | | | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours (temperature compensating type) or 48±4 hours (high dielectric constant type) at room temperature, then measure. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. +0/-3</td> <td>Room Temp.</td> <td>Max. Operating Temp. +3/-0</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> <ul style="list-style-type: none"> • Initial measurement for high dielectric constant type Perform a heat treatment at 150+0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |
| | Step | 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | | |
| | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | | | | | | | | | | | | | | | | |
| | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±2.5% or ±0.25pF (Whichever is larger) | R7, R6, C7: Within ±7.5% | | | | | | | | | | | | | | | | | | |
| Q/D.F. | 30pF min.: Q≥1000 30pF max.: Q≥400+20C C: Nominal Capacitance (pF) | <table border="1" style="font-size: small;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V</th> <th>6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.025 max.</td> <td>0.035 max.</td> <td>0.035 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | Char. | 25V min. | 16V | 10V | 6.3V | R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | |
| Char. | 25V min. | 16V | 10V | 6.3V | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.025 max. | 0.035 max. | 0.035 max. | 0.05 max. | | | | | | | | | | | | | | | | | |
| I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | | | |
| 16 | Humidity Steady State | The measured and observed characteristics should satisfy the specifications in the following table. | | | | Sit the capacitor at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±5% or ±0.5pF (Whichever is larger) | R7, R6, C7: Within ±12.5% | | | | | | | | | | | | | | | | | | |
| | Q/D.F. | 30pF and over: Q≥350 10pF and over, 30pF and below: Q≥275+5C/2 10pF and below: Q≥200+10C C: Nominal Capacitance (pF) | <table border="1" style="font-size: small;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V/6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.05 max.</td> <td>0.05 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | Char. | 25V min. | | 16V | 10V/6.3V | R7, R6, C7 | 0.05 max. | 0.05 max. | 0.05 max. | | | | | | | | | |
| | Char. | 25V min. | 16V | 10V/6.3V | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.05 max. | 0.05 max. | 0.05 max. | | | | | | | | | | | | | | | | | | |
| I.R. | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | | | | | | | | | | | | | | | | | | | |
| 17 | Humidity Load | The measured and observed characteristics should satisfy the specifications in the following table. | | | | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±7.5% or ±0.75pF (Whichever is larger) | R7, R6, C7: Within ±12.5% | | | | | | | | | | | | | | | | | | |
| | Q/D.F. | 30pF and over: Q≥200 30pF and below: Q≥100+10C/3 C: Nominal Capacitance (pF) | <table border="1" style="font-size: small;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V/6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.05 max.</td> <td>0.05 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | Char. | 25V min. | | 16V | 10V/6.3V | R7, R6, C7 | 0.05 max. | 0.05 max. | 0.05 max. | | | | | | | | | |
| | Char. | 25V min. | 16V | 10V/6.3V | | | | | | | | | | | | | | | | | |
| R7, R6, C7 | 0.05 max. | 0.05 max. | 0.05 max. | | | | | | | | | | | | | | | | | | |
| I.R. | More than 500MΩ or 25Ω · F (Whichever is smaller) | | | | | | | | | | | | | | | | | | | | |

Continued on the following page.

GNM Series Specifications and Test Methods (1)

Continued from the preceding page.

**In case Non "" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).**

| No. | Item | Specifications | | Test Method | | | | | | | | | |
|------------|---|--|--|---|----------|----------|-----|----------|------------|-----------|-----------|-----------|--|
| | | Temperature Compensating Type | High Dielectric Type | | | | | | | | | | |
| 18 | High Temperature Load | The measured and observed characteristics should satisfy the specifications in the following table. | | Apply 200% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. • Initial measurement for high dielectric constant type. Apply 200% of the rated DC voltage for one hour at the maximum operating temperature ±3°C. Remove and let sit for 24±2 hours at room temperature. Perform initial measurement. | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | |
| | Capacitance Change | Within ±3% or ±0.3pF (Whichever is larger) | R7, R6, C7: Within ±12.5% | | | | | | | | | | |
| | Q/D.F. | 30pF and over: $Q \geq 350$ 10pF and over, 30pF and below: $Q \geq 275 + 5C/2$ 10pF and below: $Q \geq 200 + 10C$ C: Nominal Capacitance (pF) | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Char.</th> <th>25V min.</th> <th>16V</th> <th>10V/6.3V</th> </tr> </thead> <tbody> <tr> <td>R7, R6, C7</td> <td>0.04 max.</td> <td>0.05 max.</td> <td>0.05 max.</td> </tr> </tbody> </table> | | Char. | 25V min. | 16V | 10V/6.3V | R7, R6, C7 | 0.04 max. | 0.05 max. | 0.05 max. | |
| | Char. | 25V min. | 16V | | 10V/6.3V | | | | | | | | |
| R7, R6, C7 | 0.04 max. | 0.05 max. | 0.05 max. | | | | | | | | | | |
| I.R. | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | | | | | | | | | | | |

2

Table A


| Char. | Nominal Values (ppm/°C) Note 1 | Capacitance Change from 25°C (%) | | | | | |
|-----------|--------------------------------|----------------------------------|-------|-------|-------|-------|-------|
| | | -55°C | | -30°C | | -10°C | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C | 0±30 | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |


Note 1: Nominal values denote the temperature coefficient within a range of 25 to 125°C.

GNM Series Specifications and Test Methods (2)

In case Non "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

2
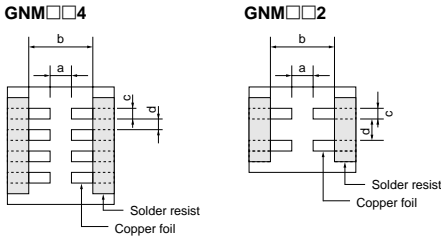
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------|---|--|---|----------------------|---------------------|-------------------|--------------------------------|------------------|---|---------------------------------|---|-------------|------------------------|------------------|----------------------|------------------------|----------|-------------|--------|--------------------------|------------------|------------------|------|--------|-----|-----|------|------|--------|-----|-----|-----|-----|
| 1 | Operating Temperature Range | R6: -55°C to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | 50Ω · F min. | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 1 minute of charging. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at 25°C at the frequency and voltage shown in the table. <table border="1"> <thead> <tr> <th>Nominal Capacitance</th> <th>Measuring Frequency</th> <th>Measuring Voltage</th> </tr> </thead> <tbody> <tr> <td>$C \leq 10\mu F$ *1 (10V min.)</td> <td>1±0.1kHz</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>$C \leq 10\mu F$ *2 (6.3V max.)</td> <td>1±0.1kHz</td> <td>0.5±0.1Vrms</td> </tr> <tr> <td>*1 For items in Table1</td> <td>1±0.1kHz</td> <td>0.5±0.1Vrms</td> </tr> <tr> <td>*2 For items in Table2</td> <td>1±0.1kHz</td> <td>1.0±0.1Vrms</td> </tr> </tbody> </table> | Nominal Capacitance | Measuring Frequency | Measuring Voltage | $C \leq 10\mu F$ *1 (10V min.) | 1±0.1kHz | 1.0±0.2Vrms | $C \leq 10\mu F$ *2 (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | *1 For items in Table1 | 1±0.1kHz | 0.5±0.1Vrms | *2 For items in Table2 | 1±0.1kHz | 1.0±0.1Vrms | | | | | | | | | | | | | | | |
| Nominal Capacitance | Measuring Frequency | Measuring Voltage | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $C \leq 10\mu F$ *1 (10V min.) | 1±0.1kHz | 1.0±0.2Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $C \leq 10\mu F$ *2 (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| *1 For items in Table1 | 1±0.1kHz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| *2 For items in Table2 | 1±0.1kHz | 1.0±0.1Vrms | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | 0.1 max.*3 Table 3 <table border="1"> <thead> <tr> <th>GNM0M2 R6 103/223/473/104</th> </tr> </thead> <tbody> <tr> <td>GNM1M2 R6 0J 105/225</td> </tr> <tr> <td>GNM1M2 R6 1A 225</td> </tr> <tr> <td>GNM212 R6 0J 225</td> </tr> <tr> <td>GNM212 R6 1A 225</td> </tr> <tr> <td>GNM214 R6 0J 225</td> </tr> </tbody> </table> *3 However 0.125 max. about Table 3 items. | GNM0M2 R6 103/223/473/104 | GNM1M2 R6 0J 105/225 | GNM1M2 R6 1A 225 | GNM212 R6 0J 225 | GNM212 R6 1A 225 | GNM214 R6 0J 225 | <table border="1"> <thead> <tr> <th colspan="3">Table 1</th> </tr> </thead> <tbody> <tr> <td>GNM0M2 R6 1A 104</td> </tr> <tr> <td>GNM0M2 R6 1C 104</td> </tr> <tr> <td>GNM1M2 R6 1A 105/225</td> </tr> <tr> <td>GNM1M2 R6 1C 224/105</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="3">Table 2</th> </tr> </thead> <tbody> <tr> <td>GNM0M2 R6 0J 103/223/473</td> </tr> <tr> <td>GNM212 R6 0J 225</td> </tr> <tr> <td>GNM214 R6 0J 105</td> </tr> </tbody> </table> | Table 1 | | | GNM0M2 R6 1A 104 | GNM0M2 R6 1C 104 | GNM1M2 R6 1A 105/225 | GNM1M2 R6 1C 224/105 | Table 2 | | | GNM0M2 R6 0J 103/223/473 | GNM212 R6 0J 225 | GNM214 R6 0J 105 | | | | | | | | | | | |
| GNM0M2 R6 103/223/473/104 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 R6 0J 105/225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 R6 1A 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 R6 0J 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 R6 1A 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 R6 0J 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Table 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM0M2 R6 1A 104 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM0M2 R6 1C 104 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 R6 1A 105/225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 R6 1C 224/105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Table 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM0M2 R6 0J 103/223/473 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 R6 0J 225 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 R6 0J 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | <table border="1"> <thead> <tr> <th>Char.</th> <th>Temp. Range</th> <th>Reference Temp.</th> <th>Cap. Change</th> </tr> </thead> <tbody> <tr> <td>R6</td> <td>-55 to +85°C</td> <td>25°C</td> <td>Within ±15%</td> </tr> </tbody> </table> | Char. | Temp. Range | Reference Temp. | Cap. Change | R6 | -55 to +85°C | 25°C | Within ±15% | The capacitance change should be measured after 5 min. at each specified temperature stage. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>85±3</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> The ranges of capacitance change compared with the 25°C value over the temperature ranges shown in the table should be within the specified ranges. • Initial measurement for high dielectric constant type. Perform a heat treatment at 150+0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement. | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 | 3 | 25±2 | 4 | 85±3 | 5 | 25±2 | | | | | | | | | | |
| Char. | Temp. Range | Reference Temp. | Cap. Change | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R6 | -55 to +85°C | 25°C | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 85±3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defects should occur.  | Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 1 using a eutectic solder. Then apply 5N (GNM0M2: 2N) force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>GNM0M2</td> <td>0.2</td> <td>0.96</td> <td>0.25</td> <td>0.2</td> </tr> <tr> <td>GNM1M2</td> <td>0.5</td> <td>1.6</td> <td>0.32</td> <td>0.32</td> </tr> <tr> <td>GNM212</td> <td>0.6</td> <td>1.8</td> <td>0.5</td> <td>0.5</td> </tr> <tr> <td>GNM214</td> <td>0.6</td> <td>2.0</td> <td>0.25</td> <td>0.25</td> </tr> <tr> <td>GNM314</td> <td>0.8</td> <td>2.5</td> <td>0.4</td> <td>0.4</td> </tr> </tbody> </table> (in mm) | Type | a | b | c | d | GNM0M2 | 0.2 | 0.96 | 0.25 | 0.2 | GNM1M2 | 0.5 | 1.6 | 0.32 | 0.32 | GNM212 | 0.6 | 1.8 | 0.5 | 0.5 | GNM214 | 0.6 | 2.0 | 0.25 | 0.25 | GNM314 | 0.8 | 2.5 | 0.4 | 0.4 |
| Type | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM0M2 | 0.2 | 0.96 | 0.25 | 0.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 | 0.5 | 1.6 | 0.32 | 0.32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 | 0.6 | 1.8 | 0.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 | 0.6 | 2.0 | 0.25 | 0.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM314 | 0.8 | 2.5 | 0.4 | 0.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Vibration | Appearance: No defects or abnormalities Capacitance: Within the specified tolerance D.F.: 0.1 max.*3 *3 However 0.125 max. about Table 3 items. | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Continued on the following page. 

GNM Series Specifications and Test Methods (2)

Continued from the preceding page.

In case Non "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GNM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|---|--|--|------------|----------------------|------------|---|---------------|------------|----------------------|------------|----------------------|---------------|-------------|----------|-----------|-----------|---------------|----------|----------|----------|----------|---------------|----------|----------|----------|----------|---------------|----------|----------|----------|----------|---|
| 12 | Appearance | No marking defects | Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>GNM0M2</td> <td>2.0±0.05</td> <td>0.2±0.05</td> <td>0.2±0.05</td> <td>0.25±0.05</td> </tr> <tr> <td>GNM1M2</td> <td>2.0±0.05</td> <td>0.5±0.05</td> <td>0.32±0.05</td> <td>0.32±0.05</td> </tr> <tr> <td>GNM212</td> <td>2.0±0.05</td> <td>0.6±0.05</td> <td>0.5±0.05</td> <td>0.5±0.05</td> </tr> <tr> <td>GNM214</td> <td>2.0±0.05</td> <td>0.7±0.05</td> <td>0.3±0.05</td> <td>0.2±0.05</td> </tr> <tr> <td>GNM314</td> <td>2.5±0.05</td> <td>0.8±0.05</td> <td>0.4±0.05</td> <td>0.4±0.05</td> </tr> </tbody> </table> <p style="text-align: center;">(in mm)</p> <p style="text-align: center;">Fig. 2</p> | Type | a | b | c | d | GNM0M2 | 2.0±0.05 | 0.2±0.05 | 0.2±0.05 | 0.25±0.05 | GNM1M2 | 2.0±0.05 | 0.5±0.05 | 0.32±0.05 | 0.32±0.05 | GNM212 | 2.0±0.05 | 0.6±0.05 | 0.5±0.05 | 0.5±0.05 | GNM214 | 2.0±0.05 | 0.7±0.05 | 0.3±0.05 | 0.2±0.05 | GNM314 | 2.5±0.05 | 0.8±0.05 | 0.4±0.05 | 0.4±0.05 | <p style="text-align: center;">Fig. 3</p> |
| Type | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM0M2 | 2.0±0.05 | 0.2±0.05 | 0.2±0.05 | 0.25±0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM1M2 | 2.0±0.05 | 0.5±0.05 | 0.32±0.05 | 0.32±0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM212 | 2.0±0.05 | 0.6±0.05 | 0.5±0.05 | 0.5±0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM214 | 2.0±0.05 | 0.7±0.05 | 0.3±0.05 | 0.2±0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GNM314 | 2.5±0.05 | 0.8±0.05 | 0.4±0.05 | 0.4±0.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2±0.5 seconds at 230±5°C or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Appearance | No marking defects | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours, then measure. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | R6 ⁴ : Within ±7.5% *4 GNM0M2R60E105: Within +15/-7.5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | D.F. | 0.1 max. ^{*3} ^{*3} However 0.125 max. about Table 3 items. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | I.R. | 50Ω · F min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Appearance | No marking defects | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp.</td> <td>Room Temp.</td> <td>Min. Operating Temp.</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> • Initial measurement Perform a heat treatment at 150 +0/-10 °C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. | Room Temp. | Min. Operating Temp. | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | | | | | |
| | Step | 1 | | 2 | 3 | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Temp. (°C) | Min. Operating Temp. | | Room Temp. | Min. Operating Temp. | Room Temp. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Time (min.) | 30±3 | | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | R6 ⁵ : Within ±12.5% ^{*5} GNM0M2R60E105: Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D.F. | 0.1 max. ^{*3} ^{*3} However 0.125 max. about Table 3 items. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | 50Ω · F min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | Appearance | No marking defects | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. The charge/discharge current is less than 50mA. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | R6: Within ±12.5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | D.F. | 0.2 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | I.R. | 12.5Ω · F min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | Appearance | No marking defects | Apply 150% (GNM1M2R61A225/1C105: 125% of the rated voltage) of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. • Initial measurement Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | R6: Within ±12.5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | D.F. | 0.2 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | I.R. | 25Ω · F min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Chip Monolithic Ceramic Capacitors



Low ESL LLL/LLA/LLM Series

3


Reversed Geometry Low ESL Type

■ Features

1. Low ESL, good for noise reduction for high frequency
2. Small, high cap

■ Applications

1. High speed micro processor
2. High frequency digital equipment

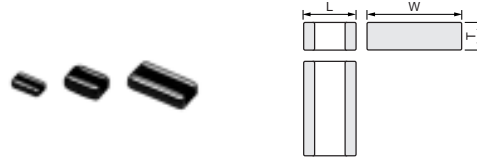

| Part Number | Dimensions (mm) | | |
|-------------|-----------------|-----------|--------------|
| | L | W | T |
| LLL153 | 0.5 ±0.05 | 1.0 ±0.05 | 0.3 ±0.05 |
| LLL185 | 0.8 ±0.1 | 1.6 ±0.1 | 0.6 max. |
| LLL215 | 1.25 ±0.1 | 2.0 ±0.1 | 0.5 +0/-0.15 |
| LLL216 | | | 0.6 ±0.1 |
| LLL219 | 1.6 ±0.15 | 3.2 ±0.15 | 0.85 ±0.1 |
| LLL315 | | | 0.5 +0/-0.15 |
| LLL317 | | | 0.7 ±0.1 |
| LLL31M | | | 1.15 ±0.1 |


Eight Terminals Low ESL Type

■ Features

1. Low ESL (100pH) , suitable to decoupling capacitor for 1GHz clock speed IC.
2. Small, large cap

■ Applications

1. High speed micro processor
2. High frequency digital equipment

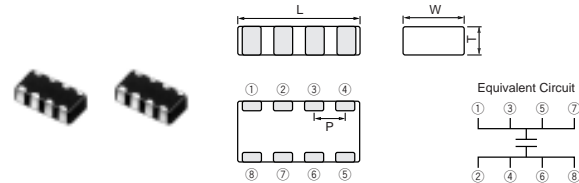

| Part Number | Dimensions (mm) | | | |
|-------------|-----------------|-----------|----------------|-----------|
| | L | W | T | P |
| LLA185 | 1.6 ±0.1 | 0.8 ±0.1 | 0.5 +0.05/-0.1 | 0.4 ±0.1 |
| LLA215 | 2.0 ±0.1 | 1.25 ±0.1 | 0.5 +0.05/-0.1 | 0.5 ±0.05 |
| LLA219 | 2.0 ±0.1 | 1.25 ±0.1 | 0.85 ±0.1 | 0.5 ±0.05 |
| LLA315 | 3.2 ±0.15 | 1.6 ±0.15 | 0.5 +0.05/-0.1 | 0.8 ±0.1 |
| LLA319 | 3.2 ±0.15 | 1.6 ±0.15 | 0.85 ±0.1 | 0.8 ±0.1 |
| LLA31M | 3.2 ±0.15 | 1.6 ±0.15 | 1.15 ±0.1 | 0.8 ±0.1 |


Ten Terminals Low ESL Type

■ Features

1. Low ESL (45pH), suitable to decoupling capacitor for 2GHz clock speed IC.
2. Small, large cap

■ Applications

1. High speed micro processor
2. High frequency digital equipment

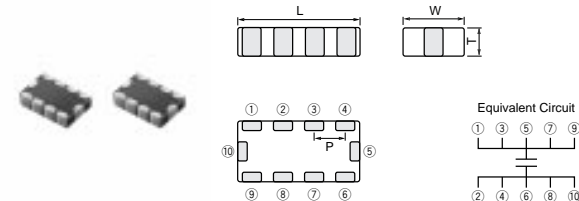

| Part Number | Dimensions (mm) | | | |
|-------------|-----------------|-----------|----------------|-----------|
| | L | W | T | P |
| LLM215 | 2.0 ±0.1 | 1.25 ±0.1 | 0.5 +0.05/-0.1 | 0.5 ±0.05 |
| LLM315 | 3.2 ±0.15 | 1.6 ±0.15 | 0.5 +0.05/-0.1 | 0.8 ±0.1 |

Capacitance Table

Reversed Geometry Low ESL Type X7R(R7)/X7S(C7)/X6S(C8)/X5R(R6) Characteristics

| 5 | | ex.5: T Dimension [mm] | | | | | | | | | | | | | | | | | |
|--------------|---------------------|------------------------|----------|----------|----------|---------------------|----------|----------|----------|----------------------|----------|----------|----------|---------------------|----------|----------|----------|----------|----------|
| LxW [mm] | Rated Voltage [Vdc] | 0.5x1.0 (15) <0204> | | | | 0.8x1.6 (18) <0306> | | | | 1.25x2.0 (21) <0508> | | | | 1.6x3.2 (31) <0612> | | | | | |
| | | 6.3 (0J) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | |
| Capacitance | TC | X6S (C8) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X5R (R6) |
| | | 2200pF(222) | | | | 5 | | | | | | | | | | | | | |
| 4700pF(472) | | | | 5 | | | | | | | | | | | | | | | |
| 10000pF(103) | | | | | 5 | | | | 6 | | | | | 7 | | | | | |
| 22000pF(223) | | | | | 5 | | | | 6 | | | | | 7 | | | | | |
| 47000pF(473) | | | | | | 5 | | | | 6 | | | | 7 | | | | | |
| 0.10μF(104) | 3 | | | | | | 5 | | | 6 | | | | M | 7 | | | | |
| 0.22μF(224) | 3 | | | | | | 5 | | | | 9 | 6 | | | M | 7 | | | |
| 0.47μF(474) | | 3 | | | | | | 5 | | | | 9 | | | M | 7 | | | |
| 1.0μF(105) | | | | | | | | 5 | | | | 9 | | | | M | 7 | | |
| 2.2μF(225) | | | | | | | | 5 | | | | | 9 | | | | M | 7 | |
| 4.7μF(475) | | | | | | | | | | | | | | | | | | M | 7 |
| 10μF(106) | | | | | | | | | | | | | | | | | | | M |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Reversed Geometry Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| 5 | | ex.5: T Dimension [mm] | | | | | | | | | | | | |
|--------------|---------------------|------------------------|----------|----------|----------|----------------------|----------|----------|----------|---------------------|----------|----------|----------|----------|
| LxW [mm] | Rated Voltage [Vdc] | 0.8x1.6 (18) <0306> | | | | 1.25x2.0 (21) <0508> | | | | 1.6x3.2 (31) <0612> | | | | |
| | | 25 (1E) | 16 (1C) | 10 (1A) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 50 (1H) | 25 (1E) | 16 (1C) |
| Capacitance | TC | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) |
| | | 10000pF(103) | | 5 | | | | 5 | | | | | | 5 |
| 22000pF(223) | | | 5 | | | | 5 | | | | | 5 | | |
| 47000pF(473) | | | 5 | | | | | 5 | | | | 5 | | |
| 0.10μF(104) | | | | 5 | | | | 5 | | | | 5 | | |
| 0.22μF(224) | | | | | 5 | | | | 5 | | | | 5 | |
| 0.47μF(474) | | | | | | | | | | 5 | | | | 5 |
| 1.0μF(105) | | | | | | | | | | | 5 | | | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Continued on the following page. ↗

3

Capacitance Table

Continued from the preceding page.

Eight Terminals Low ESL Type X7S(C7)/X7R(R7) Characteristics

| | LxW [mm] | 2.0x1.25 (21) <0805> | | | | | 3.2x1.6 (31) <1206> | | | |
|------------------------|-------------|----------------------------|-------------|-------------|-------------|-------------|---------------------------|-------------|-------------|-------------|
| | | 1.6x0.8 (18) <0603> | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 4 (0G) |
| Rated Voltage [Vdc] | | 4 (0G) | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 4 (0G) |
| TC | | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) |
| Capacitance | | | | | | | | | | |
| 10000pF(103) | | | 9 | | | | | | | |
| 22000pF(223) | | | 9 | | | | | | | |
| 47000pF(473) | | | 9 | | | | | | | |
| 0.10μF(104) | 5 | | 9 | | | | | 9 | | |
| 0.22μF(224) | 5 | | 9 | | | | | 9 | | |
| 0.47μF(474) | 5 | | | 9 | | | | 9 | | |
| 1.0μF(105) | 5 | | | | 9 | | M | 9 | | |
| 2.2μF(225) | 5 | | | | | 9 | | M | 9 | |
| 4.7μF(475) | | | | | | 9 | | | | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Eight Terminals Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| | LxW [mm] | 2.0x1.25 (21) <0805> | | | | | 3.2x1.6 (31) <1206> | | |
|------------------------|-------------|----------------------------|-------------|-------------|-------------|-------------|---------------------------|-------------|-------------|
| | | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 6.3 (0J) |
| Rated Voltage [Vdc] | | 25 (1E) | 16 (1C) | 10 (1A) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 6.3 (0J) |
| TC | | X7R (R7) | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) |
| Capacitance | | | | | | | | | |
| 10000pF(103) | 5 | | | | | | | | |
| 22000pF(223) | 5 | | | | | | | | |
| 47000pF(473) | | 5 | | | | | | | |
| 0.10μF(104) | | 5 | | | | | 5 | | |
| 0.22μF(224) | | | 5 | | | | 5 | | |
| 0.47μF(474) | | | | 5 | | | 5 | | |
| 1.0μF(105) | | | | | 5 | | | 5 | |
| 2.2μF(225) | | | | | 5 | | | 5 | |
| 4.7μF(475) | | | | | 5 | | | | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Ten Terminals Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| | LxW [mm] | 2.0x1.25 (21) <0805> | | | | 3.2x1.6 (31) <1206> | | |
|------------------------|-------------|----------------------------|-------------|-------------|-------------|---------------------------|-------------|-------------|
| | | 25 (1E) | 16 (1C) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 6.3 (0J) |
| Rated Voltage [Vdc] | | 25 (1E) | 16 (1C) | 6.3 (0J) | 4 (0G) | 16 (1C) | 10 (1A) | 6.3 (0J) |
| TC | | X7R (R7) | X7R (R7) | X7R (R7) | X7S (C7) | X7R (R7) | X7R (R7) | X7R (R7) |
| Capacitance | | | | | | | | |
| 10000pF(103) | 5 | | | | | | | |
| 22000pF(223) | 5 | | | | | | | |
| 47000pF(473) | | 5 | | | | | | |
| 0.10μF(104) | | 5 | | | | 5 | | |
| 0.22μF(224) | | | 5 | | | 5 | | |
| 0.47μF(474) | | | | 5 | | | 5 | |
| 1.0μF(105) | | | | | 5 | | | |
| 2.2μF(225) | | | | | 5 | | | 5 |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Reversed Geometry Low ESL Type X7R(R7)/X7S(C7)/X6S(C8) Characteristics

| | | | |
|-------------------|-----------|---------------------|-------|
| LxW [mm] | | 0.5x1.0(15)<0204> | |
| Rated Volt. [Vdc] | | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | |
| 0.10μF(104) | ±20%(M) | LLL153C80J104ME01E* | |
| 0.22μF(224) | ±20%(M) | LLL153C80J224ME14E* | |
| 0.47μF(474) | ±20%(M) | LLL153C70G474ME17E* | |

LLL153 Series 4V/0.47μF(L: 0.5+0.07/-0.03mm)

| | | | | | |
|-------------------|-----------|--------------------|--------|--------|--------|
| LxW [mm] | | 0.8x1.6(18)<0306> | | | |
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | | |
| 2200pF(222) | ±20%(M) | LLL185R71H222MA01L | | | |
| 4700pF(472) | ±20%(M) | LLL185R71H472MA01L | | | |
| 10000pF(103) | ±20%(M) | LLL185R71E103MA01L | | | |
| 22000pF(223) | ±20%(M) | LLL185R71E223MA01L | | | |
| 47000pF(473) | ±20%(M) | LLL185R71C473MA01L | | | |
| 0.10μF(104) | ±20%(M) | LLL185R71A104MA01L | | | |
| 0.22μF(224) | ±20%(M) | LLL185R71A224MA01L | | | |

| | | | |
|-------------------|-----------|---------------------|--|
| LxW [mm] | | 0.8x1.6(18)<0306> | |
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 0.47μF(474) | ±20%(M) | LLL185C70G474MA01L | |
| 1.0μF(105) | ±20%(M) | LLL185C70G105ME02L* | |
| 2.2μF(225) | ±20%(M) | LLL185C70G225ME01L* | |

| | | | | | |
|-------------------|-----------|--------------------|--------|--------|--------|
| LxW [mm] | | 1.25x2.0(21)<0508> | | | |
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLL216R71H103MA01L | | | |
| 22000pF(223) | ±20%(M) | LLL216R71H223MA01L | | | |
| 47000pF(473) | ±20%(M) | LLL216R71E473MA01L | | | |
| 0.10μF(104) | ±20%(M) | LLL216R71E104MA01L | | | |
| 0.22μF(224) | ±20%(M) | LLL219R71C224MA01L | | | |
| 0.47μF(474) | ±20%(M) | LLL219R71A474MA01L | | | |
| 1.0μF(105) | ±20%(M) | LLL219R71A105MA01L | | | |

| | | | |
|-------------------|-----------|--------------------|--|
| LxW [mm] | | 1.25x2.0(21)<0508> | |
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 2.2μF(225) | ±20%(M) | LLL219C70G225MA01L | |

The part number code is shown in () and Unit is shown in []. <>: EIA [inch] Code

*: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

(Part Number) **LL** **L** **15** **3** **C8** **0J** **104** **M** **E01** **E**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Reversed Geometry Low ESL Type X7R(R7)/X5R(R6) Characteristics

| LxW [mm] | | 1.6x3.2(31)<0612> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLL317R71H103MA01L | | | |
| 22000pF(223) | ±20%(M) | LLL317R71H223MA01L | | | |
| 47000pF(473) | ±20%(M) | LLL317R71H473MA01L | | | |
| 0.10μF(104) | ±20%(M) | LLL31MR71H104MA01L | LLL317R71E104MA01L | | |
| 0.22μF(224) | ±20%(M) | | LLL31MR71E224MA01L | LLL317R71C224MA01L | |
| 0.47μF(474) | ±20%(M) | | LLL31MR71E474MA01L | LLL317R71C474MA01L | |
| 1.0μF(105) | ±20%(M) | | | LLL31MR71C105MA01L | LLL317R71A105MA01L |
| 2.2μF(225) | ±20%(M) | | | | LLL31MR71A225MA01L |

| LxW [mm] | | 1.6x3.2(31)<0612> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 6.3(0J) | |
| Capacitance | Tolerance | Part Number | |
| 2.2μF(225) | ±20%(M) | LLL317R70J225MA01L | |
| 4.7μF(475) | ±20%(M) | LLL31MR70J475MA01L | |
| 10μF(106) | ±20%(M) | LLL31MR60J106ME01L* | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

Reversed Geometry Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| LxW [mm] | | 0.8x1.6(18)<0306> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 4(0G) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLL185R71E103MA11L | | | |
| 22000pF(223) | ±20%(M) | | LLL185R71C223MA11L | | |
| 47000pF(473) | ±20%(M) | | LLL185R71C473MA11L | | |
| 0.10μF(104) | ±20%(M) | | | LLL185R71A104MA11L | |
| 0.22μF(224) | ±20%(M) | | | | LLL185C70G224MA11L |

| LxW [mm] | | 1.25x2.0(21)<0508> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLL215R71H103MA11L | | | |
| 22000pF(223) | ±20%(M) | | LLL215R71E223MA11L | | |
| 47000pF(473) | ±20%(M) | | | LLL215R71C473MA11L | |
| 0.10μF(104) | ±20%(M) | | | LLL215R71C104MA11L | |
| 0.22μF(224) | ±20%(M) | | | | LLL215R71A224MA11L |

| LxW [mm] | | 1.25x2.0(21)<0508> | |
|-------------------|-----------|--------------------|-------|
| Rated Volt. [Vdc] | | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | |
| 0.47μF(474) | ±20%(M) | LLL215R70J474MA11L | |
| 1.0μF(105) | ±20%(M) | LLL215C70G105MA11L | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

(Part Number) **LL** **L** **31** **7** **R7** **1H** **103** **M** **A01** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Product ID
- ② Series
- ③ Dimension (LxW)
- ④ Dimension (T)
- ⑤ Temperature Characteristics
- ⑥ Rated Voltage
- ⑦ Capacitance
- ⑧ Capacitance Tolerance
- ⑨ Individual Specification Code
- ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Reversed Geometry Low ESL Type X7R(R7) Characteristics Low Profile

| LxW [mm] | | 1.6x3.2(31)<0612> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLL315R71H103MA11L | | | |
| 22000pF(223) | ±20%(M) | LLL315R71H223MA11L | | | |
| 47000pF(473) | ±20%(M) | | LLL315R71E473MA11L | | |
| 0.10μF(104) | ±20%(M) | | LLL315R71E104MA11L | | |
| 0.22μF(224) | ±20%(M) | | | LLL315R71C224MA11L | |
| 0.47μF(474) | ±20%(M) | | | | LLL315R71A474MA11L |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

3

Eight Terminals Low ESL Type X7R(R7)/X7S(C7) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 0.10μF(104) | ±20%(M) | LLA185C70G104MA01L | |
| 0.22μF(224) | ±20%(M) | LLA185C70G224MA01L | |
| 0.47μF(474) | ±20%(M) | LLA185C70G474MA01L | |
| 1.0μF(105) | ±20%(M) | LLA185C70G105ME01L* | |
| 2.2μF(225) | ±20%(M) | LLA185C70G225ME16L* | |

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLA219R71E103MA01L | | | |
| 22000pF(223) | ±20%(M) | LLA219R71E223MA01L | | | |
| 47000pF(473) | ±20%(M) | LLA219R71E473MA01L | | | |
| 0.10μF(104) | ±20%(M) | | LLA219R71C104MA01L | | |
| 0.22μF(224) | ±20%(M) | | LLA219R71C224MA01L | | |
| 0.47μF(474) | ±20%(M) | | | LLA219R71A474MA01L | |
| 1.0μF(105) | ±20%(M) | | | | LLA219R70J105MA01L |

| LxW [mm] | | 2.0x1.25(21)<0805> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 2.2μF(225) | ±20%(M) | LLA219C70G225MA01L | |
| 4.7μF(475) | ±20%(M) | LLA219C70G475ME01L* | |

| LxW [mm] | | 3.2x1.6(31)<1206> | | |
|-------------------|-----------|--------------------|--------------------|-------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 4(0G) |
| Capacitance | Tolerance | Part Number | | |
| 0.10μF(104) | ±20%(M) | LLA319R71C104MA01L | | |
| 0.22μF(224) | ±20%(M) | LLA319R71C224MA01L | | |
| 0.47μF(474) | ±20%(M) | LLA319R71C474MA01L | | |
| 1.0μF(105) | ±20%(M) | LLA31MR71C105MA01L | LLA319R71A105MA01L | |
| 2.2μF(225) | ±20%(M) | LLA31MR71A225MA01L | LLA319R70G225MA01L | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

Eight Terminals Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLA215R71E103MA14L | | | |
| 22000pF(223) | ±20%(M) | LLA215R71E223MA14L | | | |
| 47000pF(473) | ±20%(M) | | LLA215R71C473MA14L | | |
| 0.10μF(104) | ±20%(M) | | LLA215R71C104MA14L | | |
| 0.22μF(224) | ±20%(M) | | | LLA215R71A224MA14L | |
| 0.47μF(474) | ±20%(M) | | | | LLA215R70J474MA14L |

| LxW [mm] | | 2.0x1.25(21)<0805> | |
|-------------------|-----------|---------------------|--|
| Rated Volt. [Vdc] | | 4(0G) | |
| Capacitance | Tolerance | Part Number | |
| 1.0μF(105) | ±20%(M) | LLA215C70G105MA14L | |
| 2.2μF(225) | ±20%(M) | LLA215C70G225ME11L* | |
| 4.7μF(475) | ±20%(M) | LLA215C70G475ME19L* | |

| LxW [mm] | | 3.2x1.6(31)<1206> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 0.22μF(224) | ±20%(M) | LLA315R71C224MA14L | | |
| 0.47μF(474) | ±20%(M) | | LLA315R71A474MA14L | |
| 1.0μF(105) | ±20%(M) | | | LLA315R70J105MA14L |
| 2.2μF(225) | ±20%(M) | | | LLA315R70J225MA14L |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

Ten Terminals Low ESL Type X7R(R7)/X7S(C7) Characteristics Low Profile

| LxW [mm] | | 2.0x1.25(21)<0805> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|---------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 6.3(0J) | 4(0G) |
| Capacitance | Tolerance | Part Number | | | |
| 10000pF(103) | ±20%(M) | LLM215R71E103MA11L | | | |
| 22000pF(223) | ±20%(M) | LLM215R71E223MA11L | | | |
| 47000pF(473) | ±20%(M) | | LLM215R71C473MA11L | | |
| 0.10μF(104) | ±20%(M) | | LLM215R71C104MA11L | | |
| 0.22μF(224) | ±20%(M) | | | LLM215R70J224MA11L | |
| 0.47μF(474) | ±20%(M) | | | LLM215R70J474MA11L | |
| 1.0μF(105) | ±20%(M) | | | | LLM215C70G105MA11L |
| 2.2μF(225) | ±20%(M) | | | | LLM215C70G225ME11L* |

| LxW [mm] | | 3.2x1.6(31)<1206> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 16(1C) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 0.10μF(104) | ±20%(M) | LLM315R71C104MA11L | | |
| 0.22μF(224) | ±20%(M) | LLM315R71C224MA11L | | |
| 0.47μF(474) | ±20%(M) | | LLM315R71A474MA11L | |
| 2.2μF(225) | ±20%(M) | | | LLM315R70J225MA11L |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code
 *: Please refer to LLL/LLA/LLM Series Specifications and Test Method(2).

(Part Number) **LL** **A** **21** **5** **R7** **1E** **103** **M** **A14** **L**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Product ID
- ② Series
- ③ Dimension (LxW)
- ④ Dimension (T)
- ⑤ Temperature Characteristics
- ⑥ Rated Voltage
- ⑦ Capacitance
- ⑧ Capacitance Tolerance
- ⑨ Individual Specification Code
- ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

LLL/LLA/LLM Series Specifications and Test Methods (1)

In case Non "***" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|---|--|------------------|-----------------|------------|----|-------------|------|-------------|----|-------------|------|-------------|---|------|------------------|---|------|---|-------|---|------|---|-------|---|------|
| 1 | Operating Temperature Range | R7, C7: -55 to +125°C | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | C ≤ 0.047μF: More than 10,000MΩ C > 0.047μF: More than 500Ω · F C: Normal Capacitance | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 2 minutes of charging. | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at 25°C at the frequency and voltage shown in the table. Frequency: 1±0.1kHz Voltage: 1±0.2Vrms *For LLA185C70G474, the capacitance should be measured using a voltage of 0.5±0.1Vrms. | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | W.V.: 25V min.; 0.025 max. W.V.: 16V/10V max.; 0.035 max. W.V.: 6.3V max.; 0.05 max. | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Char.</th> <th>Temp. Range (°C)</th> <th>Reference Temp.</th> <th>Cap.Change</th> </tr> </thead> <tbody> <tr> <td>R7</td> <td>-55 to +125</td> <td>25°C</td> <td>Within ±15%</td> </tr> <tr> <td>C7</td> <td>-55 to +125</td> <td>25°C</td> <td>Within ±22%</td> </tr> </tbody> </table> | Char. | Temp. Range (°C) | Reference Temp. | Cap.Change | R7 | -55 to +125 | 25°C | Within ±15% | C7 | -55 to +125 | 25°C | Within ±22% | <p>The capacitance change should be measured after 5 min. at each specified temperature stage.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>125±3</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> <p>The ranges of capacitance change compared with the 25°C value over the temperature ranges shown in the table should be within the specified ranges. • Initial measurement. Perform a heat treatment at 150±0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 | 3 | 25±2 | 4 | 125±3 | 5 | 25±2 |
| Char. | Temp. Range (°C) | Reference Temp. | Cap.Change | | | | | | | | | | | | | | | | | | | | | | | | |
| R7 | -55 to +125 | 25°C | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | |
| C7 | -55 to +125 | 25°C | Within ±22% | | | | | | | | | | | | | | | | | | | | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 125±3 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | Solder the capacitor to the test jig (glass epoxy board) using a eutectic solder. Then apply 10N* force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. *LLL18 and LLA/LLM Series: 5N | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2±0.5 seconds at 230±5°C, or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C. | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours, then measure. • Initial measurement. Perform a heat treatment at 150±0/0°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | | | | | | | | | | | | | | | | | | | | | | | | | |

LLL/LLA/LLM Series Specifications and Test Methods (1)


Continued from the preceding page. In case Non "***" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (1).
 In case "***" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|------|--|--------------------|---|--|------------|--------------------------------------|------------|---|------------|--------------------------------------|------------|--------------------------------------|------------|-------------|------|--------|------|--------|
| 14 | Temperature Cycle | Appearance | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. $\pm 3^{\circ}$</td> <td>Room Temp.</td> <td>Max. Operating Temp. $\pm 3^{\circ}$</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. $\pm 3^{\circ}$ | Room Temp. | Max. Operating Temp. $\pm 3^{\circ}$ | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |
| | | Step | | 1 | 2 | 3 | 4 | | | | | | | | | | | |
| | | Temp. (°C) | | Min. Operating Temp. $\pm 3^{\circ}$ | Room Temp. | Max. Operating Temp. $\pm 3^{\circ}$ | Room Temp. | | | | | | | | | | | |
| | | Time (min.) | | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | |
| | | Capacitance Change | | Within ±7.5% | | | | | | | | | | | | | | |
| D.F. | W.V.: 25V min.; 0.025 max. W.V.: 16V/10V max.; 0.035 max. W.V.: 6.3V max.; 0.05 max. | | | | | | | | | | | | | | | | | |
| I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | | | | | | | | | | | | | | | | |
| | Dielectric Strength | No failure | | | | | | | | | | | | | | | | |
| 15 | Humidity (Steady State) | Appearance | Sit the capacitor at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | Capacitance Change | | Within ±12.5% | | | | | | | | | | | | | | |
| | | D.F. | | W.V.: 10V min.; 0.05 max. W.V.: 6.3V max.; 0.075 max. | | | | | | | | | | | | | | |
| | | I.R. | | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | | | | | | | | | | | | | |
| 16 | Humidity Load | Appearance | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |
| | | Capacitance Change | | Within ±12.5% | | | | | | | | | | | | | | |
| | | D.F. | | W.V.: 10V min.; 0.05 max. W.V.: 6.3V max.; 0.075 max. | | | | | | | | | | | | | | |
| | | I.R. | | More than 500MΩ or 25Ω · F (Whichever is smaller) | | | | | | | | | | | | | | |
| 17 | High Temperature Load | Appearance | Apply 200% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. •Initial measurement. Apply 200% of the rated DC voltage for one hour at the maximum operating temperature ±3°C. Remove and let sit for 24±2 hours at room temperature. Perform initial measurement. | | | | | | | | | | | | | | | |
| | | Capacitance Change | | Within ±12.5% | | | | | | | | | | | | | | |
| | | D.F. | | W.V.: 10V min.; 0.05 max. W.V.: 6.3V max.; 0.075 max. | | | | | | | | | | | | | | |
| | | I.R. | | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | | | | | | | | | | | | | |

LLL/LLA/LLM Series Specifications and Test Methods (2)

In case Non "*" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | |
|--------------------|---|--|--|------------------|-----------------|-------------|-------------------|------------|-------------|--------------------|----------|-------------|-------------|----------|-------------|-------------|----|-------------|-------------|--|
| 1 | Operating Temperature Range | R6: -55 to +85°C R7, C7: -55 to +125°C C8: -55 to +105°C | | | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | 50Ω · F min. | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 1 minute of charging. | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at 25°C at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | R6, R7, C7, C8: 0.120 max. | <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C≤10μF (10V min.)</td> <td>1±0.1kHz</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>C≤10μF (6.3V max.)</td> <td>1±0.1kHz</td> <td>0.5±0.1Vrms</td> </tr> <tr> <td>C>10μF</td> <td>120±24Hz</td> <td>0.5±0.1Vrms</td> </tr> </tbody> </table> | Capacitance | Frequency | Voltage | C≤10μF (10V min.) | 1±0.1kHz | 1.0±0.2Vrms | C≤10μF (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | C>10μF | 120±24Hz | 0.5±0.1Vrms | | | | | |
| Capacitance | Frequency | Voltage | | | | | | | | | | | | | | | | | | |
| C≤10μF (10V min.) | 1±0.1kHz | 1.0±0.2Vrms | | | | | | | | | | | | | | | | | | |
| C≤10μF (6.3V max.) | 1±0.1kHz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | |
| C>10μF | 120±24Hz | 0.5±0.1Vrms | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | <table border="1"> <thead> <tr> <th>Char.</th> <th>Temp. Range (°C)</th> <th>Reference Temp.</th> <th>Cap. Change</th> </tr> </thead> <tbody> <tr> <td>R6</td> <td>-55 to +85</td> <td rowspan="4">25°C</td> <td>Within ±15%</td> </tr> <tr> <td>R7</td> <td>-55 to +125</td> <td>Within ±15%</td> </tr> <tr> <td>C7</td> <td>-55 to +125</td> <td>Within ±22%</td> </tr> <tr> <td>C8</td> <td>-55 to +105</td> <td>Within ±22%</td> </tr> </tbody> </table> | Char. | Temp. Range (°C) | Reference Temp. | Cap. Change | R6 | -55 to +85 | 25°C | Within ±15% | R7 | -55 to +125 | Within ±15% | C7 | -55 to +125 | Within ±22% | C8 | -55 to +105 | Within ±22% | <p>The capacitance change should be measured after 5 min. at each specified temperature stage.</p> <p>The ranges of capacitance change compared with the 25°C value over the temperature ranges shown in the table should be within the specified ranges.</p> <p>• Initial measurement. Perform a heat treatment at 150±0/-10°C for one hour and then set for 24±2 hours at room temperature. Perform the initial measurement.</p> |
| Char. | Temp. Range (°C) | Reference Temp. | Cap. Change | | | | | | | | | | | | | | | | | |
| R6 | -55 to +85 | 25°C | Within ±15% | | | | | | | | | | | | | | | | | |
| R7 | -55 to +125 | | Within ±15% | | | | | | | | | | | | | | | | | |
| C7 | -55 to +125 | | Within ±22% | | | | | | | | | | | | | | | | | |
| C8 | -55 to +105 | | Within ±22% | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | Solder the capacitor to the test jig (glass epoxy board) using a eutectic solder. Then apply 10N* force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. *5N (LLL15, LLL18, LLA, LLM Series) | | | | | | | | | | | | | | | | | |
| 11 | Vibration | Appearance | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | | |
| | | Capacitance | | | | | | | | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | | | | | | | | |
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2±0.5 seconds at 230±5°C, or Sn-3.0Ag-0.5Cu solder solution for 2±0.5 seconds at 245±5°C. | | | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours, then measure. | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | | | | | | | | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | | | | | | | | |
| | | I.R. | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | | | | | | | | | | | | | | | | | | |

Continued on the following page. 

LLL/LLA/LLM Series Specifications and Test Methods (2)

Continued from the preceding page.

In case Non "*" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to LLL/LLA/LLM Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|---------------------|---|--------------------|---|---|------------|-------------------------|------------|---|------------|-------------------------|------------|-------------------------|------------|-------------|------|--------|------|--------|
| 14 | Temperature Sudden Change | Appearance | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. ±3</td> <td>Room Temp.</td> <td>Min. Operating Temp. ±3</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> <ul style="list-style-type: none"> • Initial measurement Perform a heat treatment at 150±9₀°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. ±3 | Room Temp. | Min. Operating Temp. ±3 | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |
| | | Step | | 1 | 2 | 3 | 4 | | | | | | | | | | | |
| | | Temp. (°C) | | Min. Operating Temp. ±3 | Room Temp. | Min. Operating Temp. ±3 | Room Temp. | | | | | | | | | | | |
| | | Time (min.) | | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | |
| | | Capacitance Change | | R6, R7, C7, C8: Within ±12.5% | | | | | | | | | | | | | | |
| D.F. | R6, R7, C7, C8: 0.120 max. | | | | | | | | | | | | | | | | | |
| I.R. | 50Ω · F min. | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | |
| 15 | High Temperature High Humidity (Steady State) | Appearance | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. The charge/discharge current is less than 50mA. Apply the rated DC voltage. <ul style="list-style-type: none"> • Initial measurement Perform a heat treatment at 150±9₀°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150±9₀°C for one hour and then let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | Capacitance Change | | R6, R7, C7, C8: Within ±12.5% | | | | | | | | | | | | | | |
| | | D.F. | | R6, R7, C7, C8: 0.2 max. | | | | | | | | | | | | | | |
| | | I.R. | | 12.5Ω · F min. | | | | | | | | | | | | | | |
| 16 | Durability | Appearance | Apply 150% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. The charge/discharge current is less than 50mA. <ul style="list-style-type: none"> • Initial measurement Perform a heat treatment at 150±9₀°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. • Measurement after test Perform a heat treatment at 150±9₀°C for one hour and then let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | Capacitance Change | | R6, R7, C7, C8: Within ±12.5% * LLL153C70G474: Within ±20% | | | | | | | | | | | | | | |
| | | D.F. | | R6, R7, C7, C8: 0.2 max. | | | | | | | | | | | | | | |
| | | I.R. | | 25Ω · F min. | | | | | | | | | | | | | | |

Chip Monolithic Ceramic Capacitors




High-Q Type GJM Series

■ Features

1. Mobile Telecommunication and RF module, mainly
2. Quality improvement of telephone call, Low power Consumption, yield ratio improvement

■ Applications

VCO, PA, Mobile Telecommunication

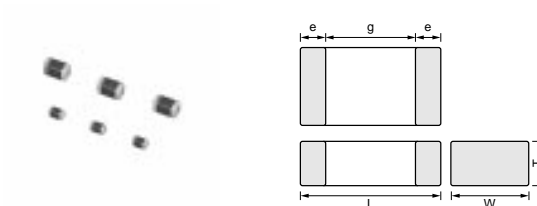

4

| Part Number | Dimensions (mm) | | | | |
|--------------|-----------------|-----------|-----------|-------------|--------|
| | L | W | T | e | g min. |
| GJM03 | 0.6 ±0.03 | 0.3 ±0.03 | 0.3 ±0.03 | 0.1 to 0.2 | 0.2 |
| GJM15 | 1.0 ±0.05 | 0.5 ±0.05 | 0.5 ±0.05 | 0.15 to 0.3 | 0.4 |

Capacitance Table

Temperature Compensating Type C0G(5C)/C0H(6C) Characteristics

3 ex.3: T Dimension [mm]

| Capacitance | LxW [mm] | 0.6x0.3 (03) <0201> | | | 1.0x0.5 (15) <0402> |
|-------------|----------|---------------------|---------|----------|---------------------|
| | | Rated Voltage [Vdc] | 25 (1A) | 6.3 (0J) | 50 (1H) |
| 0.1pF(R10) | | | | 5 | |
| 0.2pF(R20) | 3 | | | 5 | |
| 0.3pF(R30) | 3 | | | 5 | |
| 0.4pF(R40) | 3 | | | 5 | |
| 0.5pF(R50) | 3 | | | 5 | |
| 0.6pF(R60) | 3 | | | 5 | |
| 0.7pF(R70) | 3 | | | 5 | |
| 0.8pF(R80) | 3 | | | 5 | |
| 0.9pF(R90) | 3 | | | 5 | |
| 1.0pF(1R0) | 3 | | | 5 | |
| 1.1pF(1R1) | 3 | | | 5 | |
| 1.2pF(1R2) | 3 | | | 5 | |
| 1.3pF(1R3) | 3 | | | 5 | |
| 1.4pF(1R4) | 3 | | | 5 | |
| 1.5pF(1R5) | 3 | | | 5 | |
| 1.6pF(1R6) | 3 | | | 5 | |
| 1.7pF(1R7) | 3 | | | 5 | |
| 1.8pF(1R8) | 3 | | | 5 | |
| 1.9pF(1R9) | 3 | | | 5 | |
| 2.0pF(2R0) | 3 | | | 5 | |
| 2.1pF(2R1) | 3 | | | 5 | |
| 2.2pF(2R2) | 3 | | | 5 | |
| 2.3pF(2R3) | 3 | | | 5 | |
| 2.4pF(2R4) | 3 | | | 5 | |
| 2.5pF(2R5) | 3 | | | 5 | |
| 2.6pF(2R6) | 3 | | | 5 | |
| 2.7pF(2R7) | 3 | | | 5 | |
| 2.8pF(2R8) | 3 | | | 5 | |
| 2.9pF(2R9) | 3 | | | 5 | |
| 3.0pF(3R0) | 3 | | | 5 | |
| 3.1pF(3R1) | 3 | | | 5 | |
| 3.2pF(3R2) | 3 | | | 5 | |
| 3.3pF(3R3) | 3 | | | 5 | |
| 3.4pF(3R4) | 3 | | | 5 | |
| 3.5pF(3R5) | 3 | | | 5 | |
| 3.6pF(3R6) | 3 | | | 5 | |
| 3.7pF(3R7) | 3 | | | 5 | |
| 3.8pF(3R8) | 3 | | | 5 | |
| 3.9pF(3R9) | 3 | | | 5 | |
| 4.0pF(4R0) | 3 | | | 5 | |
| 4.1pF(4R1) | 3 | | | 5 | |
| 4.2pF(4R2) | 3 | | | 5 | |
| 4.3pF(4R3) | 3 | | | 5 | |
| 4.4pF(4R4) | 3 | | | 5 | |
| 4.5pF(4R5) | 3 | | | 5 | |
| 4.6pF(4R6) | 3 | | | 5 | |
| 4.7pF(4R7) | 3 | | | 5 | |
| 4.8pF(4R8) | 3 | | | 5 | |
| 4.9pF(4R9) | 3 | | | 5 | |

| Capacitance | LxW [mm] | 0.6x0.3 (03) <0201> | | | 1.0x0.5 (15) <0402> |
|-------------|----------|---------------------|---------|----------|---------------------|
| | | Rated Voltage [Vdc] | 25 (1A) | 6.3 (0J) | 50 (1H) |
| 5.0pF(5R0) | | 3 | | 5 | |
| 5.1pF(5R1) | | 3 | | 5 | |
| 5.2pF(5R2) | | 3 | | 5 | |
| 5.3pF(5R3) | | 3 | | 5 | |
| 5.4pF(5R4) | | 3 | | 5 | |
| 5.5pF(5R5) | | 3 | | 5 | |
| 5.6pF(5R6) | | 3 | | 5 | |
| 5.7pF(5R7) | | 3 | | 5 | |
| 5.8pF(5R8) | | 3 | | 5 | |
| 5.9pF(5R9) | | 3 | | 5 | |
| 6.0pF(6R0) | | 3 | | 5 | |
| 6.1pF(6R1) | | 3 | | 5 | |
| 6.2pF(6R2) | | 3 | | 5 | |
| 6.3pF(6R3) | | 3 | | 5 | |
| 6.4pF(6R4) | | 3 | | 5 | |
| 6.5pF(6R5) | | 3 | | 5 | |
| 6.6pF(6R6) | | 3 | | 5 | |
| 6.7pF(6R7) | | 3 | | 5 | |
| 6.8pF(6R8) | | 3 | | 5 | |
| 6.9pF(6R9) | | 3 | | 5 | |
| 7.0pF(7R0) | | 3 | | 5 | |
| 7.1pF(7R1) | | 3 | | 5 | |
| 7.2pF(7R2) | | 3 | | 5 | |
| 7.3pF(7R3) | | 3 | | 5 | |
| 7.4pF(7R4) | | 3 | | 5 | |
| 7.5pF(7R5) | | 3 | | 5 | |
| 7.6pF(7R6) | | 3 | | 5 | |
| 7.7pF(7R7) | | 3 | | 5 | |
| 7.8pF(7R8) | | 3 | | 5 | |
| 7.9pF(7R9) | | 3 | | 5 | |
| 8.0pF(8R0) | | 3 | | 5 | |
| 8.1pF(8R1) | | 3 | | 5 | |
| 8.2pF(8R2) | | 3 | | 5 | |
| 8.3pF(8R3) | | 3 | | 5 | |
| 8.4pF(8R4) | | 3 | | 5 | |
| 8.5pF(8R5) | | 3 | | 5 | |
| 8.6pF(8R6) | | 3 | | 5 | |
| 8.7pF(8R7) | | 3 | | 5 | |
| 8.8pF(8R8) | | 3 | | 5 | |
| 8.9pF(8R9) | | 3 | | 5 | |
| 9.0pF(9R0) | | 3 | | 5 | |
| 9.1pF(9R1) | | 3 | | 5 | |
| 9.2pF(9R2) | | 3 | | 5 | |
| 9.3pF(9R3) | | 3 | | 5 | |
| 9.4pF(9R4) | | 3 | | 5 | |
| 9.5pF(9R5) | | 3 | | 5 | |
| 9.6pF(9R6) | | 3 | | 5 | |
| 9.7pF(9R7) | | 3 | | 5 | |
| 9.8pF(9R8) | | 3 | | 5 | |

| Capacitance | LxW [mm] | 0.6x0.3 (03) <0201> | | | 1.0x0.5 (15) <0402> |
|-------------|----------|---------------------|---------|----------|---------------------|
| | | Rated Voltage [Vdc] | 25 (1A) | 6.3 (0J) | 50 (1H) |
| 9.9pF(9R9) | | 3 | | 5 | |
| 10pF(100) | | 3 | | 5 | |
| 11pF(110) | | 3 | | 5 | |
| 12pF(120) | | 3 | | 5 | |
| 13pF(130) | | 3 | | 5 | |
| 15pF(150) | | 3 | | 5 | |
| 16pF(160) | | 3 | | 5 | |
| 18pF(180) | | 3 | | 5 | |
| 20pF(200) | | 3 | | 5 | |
| 22pF(220) | | | 3 | | |
| 24pF(240) | | | 3 | | |
| 27pF(270) | | | 3 | | |
| 30pF(300) | | | 3 | | |
| 33pF(330) | | | 3 | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 0.1pF(R10) | ±0.05pF(W) | | GJM1555C1HR10WB01D |
| | ±0.1pF(B) | | GJM1555C1HR10BB01D |
| 0.2pF(R20) | ±0.05pF(W) | GJM0335C1ER20WB01D | GJM1555C1HR20WB01D |
| | ±0.1pF(B) | GJM0335C1ER20BB01D | GJM1555C1HR20BB01D |
| 0.3pF(R30) | ±0.05pF(W) | GJM0335C1ER30WB01D | GJM1555C1HR30WB01D |
| | ±0.1pF(B) | GJM0335C1ER30BB01D | GJM1555C1HR30BB01D |
| 0.4pF(R40) | ±0.05pF(W) | GJM0335C1ER40WB01D | GJM1555C1HR40WB01D |
| | ±0.1pF(B) | GJM0335C1ER40BB01D | GJM1555C1HR40BB01D |
| 0.5pF(R50) | ±0.05pF(W) | GJM0335C1ER50WB01D | GJM1555C1HR50WB01D |
| | ±0.1pF(B) | GJM0335C1ER50BB01D | GJM1555C1HR50BB01D |
| 0.6pF(R60) | ±0.05pF(W) | GJM0335C1ER60WB01D | GJM1555C1HR60WB01D |
| | ±0.1pF(B) | GJM0335C1ER60BB01D | GJM1555C1HR60BB01D |
| 0.7pF(R70) | ±0.05pF(W) | GJM0335C1ER70WB01D | GJM1555C1HR70WB01D |
| | ±0.1pF(B) | GJM0335C1ER70BB01D | GJM1555C1HR70BB01D |
| 0.8pF(R80) | ±0.05pF(W) | GJM0335C1ER80WB01D | GJM1555C1HR80WB01D |
| | ±0.1pF(B) | GJM0335C1ER80BB01D | GJM1555C1HR80BB01D |
| 0.9pF(R90) | ±0.05pF(W) | GJM0335C1ER90WB01D | GJM1555C1HR90WB01D |
| | ±0.1pF(B) | GJM0335C1ER90BB01D | GJM1555C1HR90BB01D |
| 1.0pF(1R0) | ±0.05pF(W) | GJM0335C1E1R0WB01D | GJM1555C1H1R0WB01D |
| | ±0.1pF(B) | GJM0335C1E1R0BB01D | GJM1555C1H1R0BB01D |
| | ±0.25pF(C) | GJM0335C1E1R0CB01D | GJM1555C1H1R0CB01D |
| 1.1pF(1R1) | ±0.05pF(W) | GJM0335C1E1R1WB01D | GJM1555C1H1R1WB01D |
| | ±0.1pF(B) | GJM0335C1E1R1BB01D | GJM1555C1H1R1BB01D |
| | ±0.25pF(C) | GJM0335C1E1R1CB01D | GJM1555C1H1R1CB01D |
| 1.2pF(1R2) | ±0.05pF(W) | GJM0335C1E1R2WB01D | GJM1555C1H1R2WB01D |
| | ±0.1pF(B) | GJM0335C1E1R2BB01D | GJM1555C1H1R2BB01D |
| | ±0.25pF(C) | GJM0335C1E1R2CB01D | GJM1555C1H1R2CB01D |
| 1.3pF(1R3) | ±0.05pF(W) | GJM0335C1E1R3WB01D | GJM1555C1H1R3WB01D |
| | ±0.1pF(B) | GJM0335C1E1R3BB01D | GJM1555C1H1R3BB01D |
| | ±0.25pF(C) | GJM0335C1E1R3CB01D | GJM1555C1H1R3CB01D |
| 1.4pF(1R4) | ±0.05pF(W) | GJM0335C1E1R4WB01D | GJM1555C1H1R4WB01D |
| | ±0.1pF(B) | GJM0335C1E1R4BB01D | GJM1555C1H1R4BB01D |
| | ±0.25pF(C) | GJM0335C1E1R4CB01D | GJM1555C1H1R4CB01D |
| 1.5pF(1R5) | ±0.05pF(W) | GJM0335C1E1R5WB01D | GJM1555C1H1R5WB01D |
| | ±0.1pF(B) | GJM0335C1E1R5BB01D | GJM1555C1H1R5BB01D |
| | ±0.25pF(C) | GJM0335C1E1R5CB01D | GJM1555C1H1R5CB01D |
| 1.6pF(1R6) | ±0.05pF(W) | GJM0335C1E1R6WB01D | GJM1555C1H1R6WB01D |
| | ±0.1pF(B) | GJM0335C1E1R6BB01D | GJM1555C1H1R6BB01D |
| | ±0.25pF(C) | GJM0335C1E1R6CB01D | GJM1555C1H1R6CB01D |
| 1.7pF(1R7) | ±0.05pF(W) | GJM0335C1E1R7WB01D | GJM1555C1H1R7WB01D |
| | ±0.1pF(B) | GJM0335C1E1R7BB01D | GJM1555C1H1R7BB01D |
| | ±0.25pF(C) | GJM0335C1E1R7CB01D | GJM1555C1H1R7CB01D |
| 1.8pF(1R8) | ±0.05pF(W) | GJM0335C1E1R8WB01D | GJM1555C1H1R8WB01D |
| | ±0.1pF(B) | GJM0335C1E1R8BB01D | GJM1555C1H1R8BB01D |
| | ±0.25pF(C) | GJM0335C1E1R8CB01D | GJM1555C1H1R8CB01D |
| 1.9pF(1R9) | ±0.05pF(W) | GJM0335C1E1R9WB01D | GJM1555C1H1R9WB01D |
| | ±0.1pF(B) | GJM0335C1E1R9BB01D | GJM1555C1H1R9BB01D |
| | ±0.25pF(C) | GJM0335C1E1R9CB01D | GJM1555C1H1R9CB01D |
| 2.0pF(2R0) | ±0.05pF(W) | GJM0335C1E2R0WB01D | GJM1555C1H2R0WB01D |
| | ±0.1pF(B) | GJM0335C1E2R0BB01D | GJM1555C1H2R0BB01D |
| | ±0.25pF(C) | GJM0335C1E2R0CB01D | GJM1555C1H2R0CB01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GJ** **M** **03** **3** **5C** **1E** **R20** **W** **B01** **D**

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)

④ Dimension (T)

⑥ Rated Voltage

⑦ Capacitance

⑨ Individual Specification Code

⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 2.1pF(2R1) | ±0.05pF(W) | GJM0335C1E2R1WB01D | GJM1555C1H2R1WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R1BB01D | GJM1555C1H2R1BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R1CB01D | GJM1555C1H2R1CB01D | | |
| 2.2pF(2R2) | ±0.05pF(W) | GJM0335C1E2R2WB01D | GJM1555C1H2R2WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R2BB01D | GJM1555C1H2R2BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R2CB01D | GJM1555C1H2R2CB01D | | |
| 2.3pF(2R3) | ±0.05pF(W) | GJM0335C1E2R3WB01D | GJM1555C1H2R3WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R3BB01D | GJM1555C1H2R3BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R3CB01D | GJM1555C1H2R3CB01D | | |
| 2.4pF(2R4) | ±0.05pF(W) | GJM0335C1E2R4WB01D | GJM1555C1H2R4WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R4BB01D | GJM1555C1H2R4BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R4CB01D | GJM1555C1H2R4CB01D | | |
| 2.5pF(2R5) | ±0.05pF(W) | GJM0335C1E2R5WB01D | GJM1555C1H2R5WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R5BB01D | GJM1555C1H2R5BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R5CB01D | GJM1555C1H2R5CB01D | | |
| 2.6pF(2R6) | ±0.05pF(W) | GJM0335C1E2R6WB01D | GJM1555C1H2R6WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R6BB01D | GJM1555C1H2R6BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R6CB01D | GJM1555C1H2R6CB01D | | |
| 2.7pF(2R7) | ±0.05pF(W) | GJM0335C1E2R7WB01D | GJM1555C1H2R7WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R7BB01D | GJM1555C1H2R7BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R7CB01D | GJM1555C1H2R7CB01D | | |
| 2.8pF(2R8) | ±0.05pF(W) | GJM0335C1E2R8WB01D | GJM1555C1H2R8WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R8BB01D | GJM1555C1H2R8BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R8CB01D | GJM1555C1H2R8CB01D | | |
| 2.9pF(2R9) | ±0.05pF(W) | GJM0335C1E2R9WB01D | GJM1555C1H2R9WB01D | | |
| | ±0.1pF(B) | GJM0335C1E2R9BB01D | GJM1555C1H2R9BB01D | | |
| | ±0.25pF(C) | GJM0335C1E2R9CB01D | GJM1555C1H2R9CB01D | | |
| 3.0pF(3R0) | ±0.05pF(W) | GJM0335C1E3R0WB01D | GJM1555C1H3R0WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R0BB01D | GJM1555C1H3R0BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R0CB01D | GJM1555C1H3R0CB01D | | |
| 3.1pF(3R1) | ±0.05pF(W) | GJM0335C1E3R1WB01D | GJM1555C1H3R1WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R1BB01D | GJM1555C1H3R1BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R1CB01D | GJM1555C1H3R1CB01D | | |
| 3.2pF(3R2) | ±0.05pF(W) | GJM0335C1E3R2WB01D | GJM1555C1H3R2WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R2BB01D | GJM1555C1H3R2BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R2CB01D | GJM1555C1H3R2CB01D | | |
| 3.3pF(3R3) | ±0.05pF(W) | GJM0335C1E3R3WB01D | GJM1555C1H3R3WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R3BB01D | GJM1555C1H3R3BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R3CB01D | GJM1555C1H3R3CB01D | | |
| 3.4pF(3R4) | ±0.05pF(W) | GJM0335C1E3R4WB01D | GJM1555C1H3R4WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R4BB01D | GJM1555C1H3R4BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R4CB01D | GJM1555C1H3R4CB01D | | |
| 3.5pF(3R5) | ±0.05pF(W) | GJM0335C1E3R5WB01D | GJM1555C1H3R5WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R5BB01D | GJM1555C1H3R5BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R5CB01D | GJM1555C1H3R5CB01D | | |
| 3.6pF(3R6) | ±0.05pF(W) | GJM0335C1E3R6WB01D | GJM1555C1H3R6WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R6BB01D | GJM1555C1H3R6BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R6CB01D | GJM1555C1H3R6CB01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GJ** **M** **03** **3** **5C** **1E** **2R1** **W** **B01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID
 ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 3.7pF(3R7) | ±0.05pF(W) | GJM0335C1E3R7WB01D | GJM1555C1H3R7WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R7BB01D | GJM1555C1H3R7BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R7CB01D | GJM1555C1H3R7CB01D | | |
| 3.8pF(3R8) | ±0.05pF(W) | GJM0335C1E3R8WB01D | GJM1555C1H3R8WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R8BB01D | GJM1555C1H3R8BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R8CB01D | GJM1555C1H3R8CB01D | | |
| 3.9pF(3R9) | ±0.05pF(W) | GJM0335C1E3R9WB01D | GJM1555C1H3R9WB01D | | |
| | ±0.1pF(B) | GJM0335C1E3R9BB01D | GJM1555C1H3R9BB01D | | |
| | ±0.25pF(C) | GJM0335C1E3R9CB01D | GJM1555C1H3R9CB01D | | |
| 4.0pF(4R0) | ±0.05pF(W) | GJM0335C1E4R0WB01D | GJM1555C1H4R0WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R0BB01D | GJM1555C1H4R0BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R0CB01D | GJM1555C1H4R0CB01D | | |
| 4.1pF(4R1) | ±0.05pF(W) | GJM0335C1E4R1WB01D | GJM1555C1H4R1WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R1BB01D | GJM1555C1H4R1BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R1CB01D | GJM1555C1H4R1CB01D | | |
| 4.2pF(4R2) | ±0.05pF(W) | GJM0335C1E4R2WB01D | GJM1555C1H4R2WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R2BB01D | GJM1555C1H4R2BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R2CB01D | GJM1555C1H4R2CB01D | | |
| 4.3pF(4R3) | ±0.05pF(W) | GJM0335C1E4R3WB01D | GJM1555C1H4R3WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R3BB01D | GJM1555C1H4R3BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R3CB01D | GJM1555C1H4R3CB01D | | |
| 4.4pF(4R4) | ±0.05pF(W) | GJM0335C1E4R4WB01D | GJM1555C1H4R4WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R4BB01D | GJM1555C1H4R4BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R4CB01D | GJM1555C1H4R4CB01D | | |
| 4.5pF(4R5) | ±0.05pF(W) | GJM0335C1E4R5WB01D | GJM1555C1H4R5WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R5BB01D | GJM1555C1H4R5BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R5CB01D | GJM1555C1H4R5CB01D | | |
| 4.6pF(4R6) | ±0.05pF(W) | GJM0335C1E4R6WB01D | GJM1555C1H4R6WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R6BB01D | GJM1555C1H4R6BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R6CB01D | GJM1555C1H4R6CB01D | | |
| 4.7pF(4R7) | ±0.05pF(W) | GJM0335C1E4R7WB01D | GJM1555C1H4R7WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R7BB01D | GJM1555C1H4R7BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R7CB01D | GJM1555C1H4R7CB01D | | |
| 4.8pF(4R8) | ±0.05pF(W) | GJM0335C1E4R8WB01D | GJM1555C1H4R8WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R8BB01D | GJM1555C1H4R8BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R8CB01D | GJM1555C1H4R8CB01D | | |
| 4.9pF(4R9) | ±0.05pF(W) | GJM0335C1E4R9WB01D | GJM1555C1H4R9WB01D | | |
| | ±0.1pF(B) | GJM0335C1E4R9BB01D | GJM1555C1H4R9BB01D | | |
| | ±0.25pF(C) | GJM0335C1E4R9CB01D | GJM1555C1H4R9CB01D | | |
| 5.0pF(5R0) | ±0.05pF(W) | GJM0335C1E5R0WB01D | GJM1555C1H5R0WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R0BB01D | GJM1555C1H5R0BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R0CB01D | GJM1555C1H5R0CB01D | | |
| 5.1pF(5R1) | ±0.05pF(W) | GJM0335C1E5R1WB01D | GJM1555C1H5R1WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R1BB01D | GJM1555C1H5R1BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R1CB01D | GJM1555C1H5R1CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R1DB01D | GJM1555C1H5R1DB01D | | |
| 5.2pF(5R2) | ±0.05pF(W) | GJM0335C1E5R2WB01D | GJM1555C1H5R2WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R2BB01D | GJM1555C1H5R2BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R2CB01D | GJM1555C1H5R2CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R2DB01D | GJM1555C1H5R2DB01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 5.3pF(5R3) | ±0.05pF(W) | GJM0335C1E5R3WB01D | GJM1555C1H5R3WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R3BB01D | GJM1555C1H5R3BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R3CB01D | GJM1555C1H5R3CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R3DB01D | GJM1555C1H5R3DB01D | | |
| 5.4pF(5R4) | ±0.05pF(W) | GJM0335C1E5R4WB01D | GJM1555C1H5R4WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R4BB01D | GJM1555C1H5R4BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R4CB01D | GJM1555C1H5R4CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R4DB01D | GJM1555C1H5R4DB01D | | |
| 5.5pF(5R5) | ±0.05pF(W) | GJM0335C1E5R5WB01D | GJM1555C1H5R5WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R5BB01D | GJM1555C1H5R5BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R5CB01D | GJM1555C1H5R5CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R5DB01D | GJM1555C1H5R5DB01D | | |
| 5.6pF(5R6) | ±0.05pF(W) | GJM0335C1E5R6WB01D | GJM1555C1H5R6WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R6BB01D | GJM1555C1H5R6BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R6CB01D | GJM1555C1H5R6CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R6DB01D | GJM1555C1H5R6DB01D | | |
| 5.7pF(5R7) | ±0.05pF(W) | GJM0335C1E5R7WB01D | GJM1555C1H5R7WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R7BB01D | GJM1555C1H5R7BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R7CB01D | GJM1555C1H5R7CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R7DB01D | GJM1555C1H5R7DB01D | | |
| 5.8pF(5R8) | ±0.05pF(W) | GJM0335C1E5R8WB01D | GJM1555C1H5R8WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R8BB01D | GJM1555C1H5R8BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R8CB01D | GJM1555C1H5R8CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R8DB01D | GJM1555C1H5R8DB01D | | |
| 5.9pF(5R9) | ±0.05pF(W) | GJM0335C1E5R9WB01D | GJM1555C1H5R9WB01D | | |
| | ±0.1pF(B) | GJM0335C1E5R9BB01D | GJM1555C1H5R9BB01D | | |
| | ±0.25pF(C) | GJM0335C1E5R9CB01D | GJM1555C1H5R9CB01D | | |
| | ±0.5pF(D) | GJM0335C1E5R9DB01D | GJM1555C1H5R9DB01D | | |
| 6.0pF(6R0) | ±0.05pF(W) | GJM0335C1E6R0WB01D | GJM1555C1H6R0WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R0BB01D | GJM1555C1H6R0BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R0CB01D | GJM1555C1H6R0CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R0DB01D | GJM1555C1H6R0DB01D | | |
| 6.1pF(6R1) | ±0.05pF(W) | GJM0335C1E6R1WB01D | GJM1555C1H6R1WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R1BB01D | GJM1555C1H6R1BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R1CB01D | GJM1555C1H6R1CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R1DB01D | GJM1555C1H6R1DB01D | | |
| 6.2pF(6R2) | ±0.05pF(W) | GJM0335C1E6R2WB01D | GJM1555C1H6R2WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R2BB01D | GJM1555C1H6R2BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R2CB01D | GJM1555C1H6R2CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R2DB01D | GJM1555C1H6R2DB01D | | |
| 6.3pF(6R3) | ±0.05pF(W) | GJM0335C1E6R3WB01D | GJM1555C1H6R3WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R3BB01D | GJM1555C1H6R3BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R3CB01D | GJM1555C1H6R3CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R3DB01D | GJM1555C1H6R3DB01D | | |
| 6.4pF(6R4) | ±0.05pF(W) | GJM0335C1E6R4WB01D | GJM1555C1H6R4WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R4BB01D | GJM1555C1H6R4BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R4CB01D | GJM1555C1H6R4CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R4DB01D | GJM1555C1H6R4DB01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GJ** **M** **03** **3** **5C** **1E** **5R3** **W** **B01** **D**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑧ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C)/C0H(6C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 6.5pF(6R5) | ±0.05pF(W) | GJM0335C1E6R5WB01D | GJM1555C1H6R5WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R5BB01D | GJM1555C1H6R5BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R5CB01D | GJM1555C1H6R5CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R5DB01D | GJM1555C1H6R5DB01D | | |
| 6.6pF(6R6) | ±0.05pF(W) | GJM0335C1E6R6WB01D | GJM1555C1H6R6WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R6BB01D | GJM1555C1H6R6BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R6CB01D | GJM1555C1H6R6CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R6DB01D | GJM1555C1H6R6DB01D | | |
| 6.7pF(6R7) | ±0.05pF(W) | GJM0335C1E6R7WB01D | GJM1555C1H6R7WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R7BB01D | GJM1555C1H6R7BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R7CB01D | GJM1555C1H6R7CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R7DB01D | GJM1555C1H6R7DB01D | | |
| 6.8pF(6R8) | ±0.05pF(W) | GJM0335C1E6R8WB01D | GJM1555C1H6R8WB01D | | |
| | ±0.1pF(B) | GJM0335C1E6R8BB01D | GJM1555C1H6R8BB01D | | |
| | ±0.25pF(C) | GJM0335C1E6R8CB01D | GJM1555C1H6R8CB01D | | |
| | ±0.5pF(D) | GJM0335C1E6R8DB01D | GJM1555C1H6R8DB01D | | |
| 6.9pF(6R9) | ±0.05pF(W) | GJM0336C1E6R9WB01D | GJM1555C1H6R9WB01D | | |
| | ±0.1pF(B) | GJM0336C1E6R9BB01D | GJM1555C1H6R9BB01D | | |
| | ±0.25pF(C) | GJM0336C1E6R9CB01D | GJM1555C1H6R9CB01D | | |
| | ±0.5pF(D) | GJM0336C1E6R9DB01D | GJM1555C1H6R9DB01D | | |
| 7.0pF(7R0) | ±0.05pF(W) | GJM0336C1E7R0WB01D | GJM1555C1H7R0WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R0BB01D | GJM1555C1H7R0BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R0CB01D | GJM1555C1H7R0CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R0DB01D | GJM1555C1H7R0DB01D | | |
| 7.1pF(7R1) | ±0.05pF(W) | GJM0336C1E7R1WB01D | GJM1555C1H7R1WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R1BB01D | GJM1555C1H7R1BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R1CB01D | GJM1555C1H7R1CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R1DB01D | GJM1555C1H7R1DB01D | | |
| 7.2pF(7R2) | ±0.05pF(W) | GJM0336C1E7R2WB01D | GJM1555C1H7R2WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R2BB01D | GJM1555C1H7R2BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R2CB01D | GJM1555C1H7R2CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R2DB01D | GJM1555C1H7R2DB01D | | |
| 7.3pF(7R3) | ±0.05pF(W) | GJM0336C1E7R3WB01D | GJM1555C1H7R3WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R3BB01D | GJM1555C1H7R3BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R3CB01D | GJM1555C1H7R3CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R3DB01D | GJM1555C1H7R3DB01D | | |
| 7.4pF(7R4) | ±0.05pF(W) | GJM0336C1E7R4WB01D | GJM1555C1H7R4WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R4BB01D | GJM1555C1H7R4BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R4CB01D | GJM1555C1H7R4CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R4DB01D | GJM1555C1H7R4DB01D | | |
| 7.5pF(7R5) | ±0.05pF(W) | GJM0336C1E7R5WB01D | GJM1555C1H7R5WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R5BB01D | GJM1555C1H7R5BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R5CB01D | GJM1555C1H7R5CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R5DB01D | GJM1555C1H7R5DB01D | | |
| 7.6pF(7R6) | ±0.05pF(W) | GJM0336C1E7R6WB01D | GJM1555C1H7R6WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R6BB01D | GJM1555C1H7R6BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R6CB01D | GJM1555C1H7R6CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R6DB01D | GJM1555C1H7R6DB01D | | |
| 7.7pF(7R7) | ±0.05pF(W) | GJM0336C1E7R7WB01D | GJM1555C1H7R7WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R7BB01D | GJM1555C1H7R7BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R7CB01D | GJM1555C1H7R7CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R7DB01D | GJM1555C1H7R7DB01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C)/C0H(6C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 7.8pF(7R8) | ±0.05pF(W) | GJM0336C1E7R8WB01D | GJM1555C1H7R8WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R8BB01D | GJM1555C1H7R8BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R8CB01D | GJM1555C1H7R8CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R8DB01D | GJM1555C1H7R8DB01D | | |
| 7.9pF(7R9) | ±0.05pF(W) | GJM0336C1E7R9WB01D | GJM1555C1H7R9WB01D | | |
| | ±0.1pF(B) | GJM0336C1E7R9BB01D | GJM1555C1H7R9BB01D | | |
| | ±0.25pF(C) | GJM0336C1E7R9CB01D | GJM1555C1H7R9CB01D | | |
| | ±0.5pF(D) | GJM0336C1E7R9DB01D | GJM1555C1H7R9DB01D | | |
| 8.0pF(8R0) | ±0.05pF(W) | GJM0336C1E8R0WB01D | GJM1555C1H8R0WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R0BB01D | GJM1555C1H8R0BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R0CB01D | GJM1555C1H8R0CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R0DB01D | GJM1555C1H8R0DB01D | | |
| 8.1pF(8R1) | ±0.05pF(W) | GJM0336C1E8R1WB01D | GJM1555C1H8R1WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R1BB01D | GJM1555C1H8R1BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R1CB01D | GJM1555C1H8R1CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R1DB01D | GJM1555C1H8R1DB01D | | |
| 8.2pF(8R2) | ±0.05pF(W) | GJM0336C1E8R2WB01D | GJM1555C1H8R2WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R2BB01D | GJM1555C1H8R2BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R2CB01D | GJM1555C1H8R2CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R2DB01D | GJM1555C1H8R2DB01D | | |
| 8.3pF(8R3) | ±0.05pF(W) | GJM0336C1E8R3WB01D | GJM1555C1H8R3WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R3BB01D | GJM1555C1H8R3BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R3CB01D | GJM1555C1H8R3CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R3DB01D | GJM1555C1H8R3DB01D | | |
| 8.4pF(8R4) | ±0.05pF(W) | GJM0336C1E8R4WB01D | GJM1555C1H8R4WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R4BB01D | GJM1555C1H8R4BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R4CB01D | GJM1555C1H8R4CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R4DB01D | GJM1555C1H8R4DB01D | | |
| 8.5pF(8R5) | ±0.05pF(W) | GJM0336C1E8R5WB01D | GJM1555C1H8R5WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R5BB01D | GJM1555C1H8R5BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R5CB01D | GJM1555C1H8R5CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R5DB01D | GJM1555C1H8R5DB01D | | |
| 8.6pF(8R6) | ±0.05pF(W) | GJM0336C1E8R6WB01D | GJM1555C1H8R6WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R6BB01D | GJM1555C1H8R6BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R6CB01D | GJM1555C1H8R6CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R6DB01D | GJM1555C1H8R6DB01D | | |
| 8.7pF(8R7) | ±0.05pF(W) | GJM0336C1E8R7WB01D | GJM1555C1H8R7WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R7BB01D | GJM1555C1H8R7BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R7CB01D | GJM1555C1H8R7CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R7DB01D | GJM1555C1H8R7DB01D | | |
| 8.8pF(8R8) | ±0.05pF(W) | GJM0336C1E8R8WB01D | GJM1555C1H8R8WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R8BB01D | GJM1555C1H8R8BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R8CB01D | GJM1555C1H8R8CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R8DB01D | GJM1555C1H8R8DB01D | | |
| 8.9pF(8R9) | ±0.05pF(W) | GJM0336C1E8R9WB01D | GJM1555C1H8R9WB01D | | |
| | ±0.1pF(B) | GJM0336C1E8R9BB01D | GJM1555C1H8R9BB01D | | |
| | ±0.25pF(C) | GJM0336C1E8R9CB01D | GJM1555C1H8R9CB01D | | |
| | ±0.5pF(D) | GJM0336C1E8R9DB01D | GJM1555C1H8R9DB01D | | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GJ M 03 3 6C 1E 7R8 W B01 D**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Product ID
- ② Series
- ③ Dimension (LxW)
- ④ Dimension (T)
- ⑤ Temperature Characteristics
- ⑥ Rated Voltage
- ⑦ Capacitance
- ⑧ Capacitance Tolerance
- ⑨ Individual Specification Code
- ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C)/C0H(6C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> | |
|-------------------|------------|--------------------|--------------------|-------------------|--|
| Rated Volt. [Vdc] | | 25(1E) | | 50(1H) | |
| Capacitance | Tolerance | Part Number | | | |
| 9.0pF(9R0) | ±0.05pF(W) | GJM0336C1E9R0WB01D | GJM1555C1H9R0WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R0BB01D | GJM1555C1H9R0BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R0CB01D | GJM1555C1H9R0CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R0DB01D | GJM1555C1H9R0DB01D | | |
| 9.1pF(9R1) | ±0.05pF(W) | GJM0336C1E9R1WB01D | GJM1555C1H9R1WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R1BB01D | GJM1555C1H9R1BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R1CB01D | GJM1555C1H9R1CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R1DB01D | GJM1555C1H9R1DB01D | | |
| 9.2pF(9R2) | ±0.05pF(W) | GJM0336C1E9R2WB01D | GJM1555C1H9R2WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R2BB01D | GJM1555C1H9R2BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R2CB01D | GJM1555C1H9R2CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R2DB01D | GJM1555C1H9R2DB01D | | |
| 9.3pF(9R3) | ±0.05pF(W) | GJM0336C1E9R3WB01D | GJM1555C1H9R3WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R3BB01D | GJM1555C1H9R3BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R3CB01D | GJM1555C1H9R3CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R3DB01D | GJM1555C1H9R3DB01D | | |
| 9.4pF(9R4) | ±0.05pF(W) | GJM0336C1E9R4WB01D | GJM1555C1H9R4WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R4BB01D | GJM1555C1H9R4BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R4CB01D | GJM1555C1H9R4CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R4DB01D | GJM1555C1H9R4DB01D | | |
| 9.5pF(9R5) | ±0.05pF(W) | GJM0336C1E9R5WB01D | GJM1555C1H9R5WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R5BB01D | GJM1555C1H9R5BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R5CB01D | GJM1555C1H9R5CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R5DB01D | GJM1555C1H9R5DB01D | | |
| 9.6pF(9R6) | ±0.05pF(W) | GJM0336C1E9R6WB01D | GJM1555C1H9R6WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R6BB01D | GJM1555C1H9R6BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R6CB01D | GJM1555C1H9R6CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R6DB01D | GJM1555C1H9R6DB01D | | |
| 9.7pF(9R7) | ±0.05pF(W) | GJM0336C1E9R7WB01D | GJM1555C1H9R7WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R7BB01D | GJM1555C1H9R7BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R7CB01D | GJM1555C1H9R7CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R7DB01D | GJM1555C1H9R7DB01D | | |
| 9.8pF(9R8) | ±0.05pF(W) | GJM0336C1E9R8WB01D | GJM1555C1H9R8WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R8BB01D | GJM1555C1H9R8BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R8CB01D | GJM1555C1H9R8CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R8DB01D | GJM1555C1H9R8DB01D | | |
| 9.9pF(9R9) | ±0.05pF(W) | GJM0336C1E9R9WB01D | GJM1555C1H9R9WB01D | | |
| | ±0.1pF(B) | GJM0336C1E9R9BB01D | GJM1555C1H9R9BB01D | | |
| | ±0.25pF(C) | GJM0336C1E9R9CB01D | GJM1555C1H9R9CB01D | | |
| | ±0.5pF(D) | GJM0336C1E9R9DB01D | GJM1555C1H9R9DB01D | | |

The part number code is shown in () and Unit is shown in [. <-: EIA [inch] Code

Temperature Compensating Type C0G(5C)/C0H(6C) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | 1.0x0.5(15)<0402> |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 6.3(0J) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 10pF(100) | ±2%(G) | GJM0336C1E100GB01D | | GJM1555C1H100GB01D |
| | ±5%(J) | GJM0336C1E100JB01D | | GJM1555C1H100JB01D |
| 11pF(110) | ±2%(G) | GJM0336C1E110GB01D | | GJM1555C1H110GB01D |
| | ±5%(J) | GJM0336C1E110JB01D | | GJM1555C1H110JB01D |
| 12pF(120) | ±2%(G) | GJM0336C1E120GB01D | | GJM1555C1H120GB01D |
| | ±5%(J) | GJM0336C1E120JB01D | | GJM1555C1H120JB01D |
| 13pF(130) | ±2%(G) | GJM0336C1E130GB01D | | GJM1555C1H130GB01D |
| | ±5%(J) | GJM0336C1E130JB01D | | GJM1555C1H130JB01D |
| 15pF(150) | ±2%(G) | GJM0336C1E150GB01D | | GJM1555C1H150GB01D |
| | ±5%(J) | GJM0336C1E150JB01D | | GJM1555C1H150JB01D |
| 16pF(160) | ±2%(G) | GJM0336C1E160GB01D | | GJM1555C1H160GB01D |
| | ±5%(J) | GJM0336C1E160JB01D | | GJM1555C1H160JB01D |
| 18pF(180) | ±2%(G) | GJM0336C1E180GB01D | | GJM1555C1H180GB01D |
| | ±5%(J) | GJM0336C1E180JB01D | | GJM1555C1H180JB01D |
| 20pF(200) | ±2%(G) | GJM0336C1E200GB01D | | GJM1555C1H200GB01D |
| | ±5%(J) | GJM0336C1E200JB01D | | GJM1555C1H200JB01D |
| 22pF(220) | ±2%(G) | | GJM0335C0J220GB01D | |
| | ±5%(J) | | GJM0335C0J220JB01D | |
| 24pF(240) | ±2%(G) | | GJM0335C0J240GB01D | |
| | ±5%(J) | | GJM0335C0J240JB01D | |
| 27pF(270) | ±2%(G) | | GJM0335C0J270GB01D | |
| | ±5%(J) | | GJM0335C0J270JB01D | |
| 30pF(300) | ±2%(G) | | GJM0335C0J300GB01D | |
| | ±5%(J) | | GJM0335C0J300JB01D | |
| 33pF(330) | ±2%(G) | | GJM0335C0J330GB01D | |
| | ±5%(J) | | GJM0335C0J330JB01D | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GJ** **M** **03** **3** **6C** **1E** **100** **G** **B01** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

GJM Series Specifications and Test Methods

4

| No. | Item | Specifications | | Test Method | | | | |
|---------|---|---|--|---|-----------|----------|---------|--------------|
| | | Temperature Compensating Type | | | | | | |
| 1 | Operating Temperature Range | -55 to +125°C | | Reference Temperature: 25°C (2C, 3C, 4C: 20°C) | | | | |
| 2 | Rated Voltage | See the previous pages. | | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | |
| 3 | Appearance | No defects or abnormalities | | Visual inspection | | | | |
| 4 | Dimensions | Within the specified dimensions | | Using calipers | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | | No failure should be observed when 300% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | |
| 6 | Insulation Resistance (I.R.) | 10,000MΩ min. or 500Ω · F min. (Whichever is smaller) | | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 2 minutes of charging. | | | | |
| 7 | Capacitance | Within the specified tolerance | | The capacitance/Q should be measured at 25°C at the frequency and voltage shown in the table. | | | | |
| 8 | Q | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400 + 20C$ C: Nominal Capacitance (pF) | | <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Frequency</td> <td>1±0.1MHz</td> </tr> <tr> <td>Voltage</td> <td>0.5 to 5Vrms</td> </tr> </table> | Frequency | 1±0.1MHz | Voltage | 0.5 to 5Vrms |
| | | Frequency | 1±0.1MHz | | | | | |
| Voltage | 0.5 to 5Vrms | | | | | | | |
| 9 | Capacitance Temperature Characteristics | Temperature Coefficient | Within the specified tolerance (Table A) | The capacitance change should be measured after 5 min. at each specified temperature stage. Temperature Compensating Type The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5, (5C: +25 to 125°C; other temp. coeffs.: +20 to 125°C) the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in steps 1, 3 and 5 by the capacitance value in step 3. | | | | |
| | Capacitance Drift | Capacitance Drift | Within ±0.2% or ±0.05pF (Whichever is larger.) | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | | Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 1 using a eutectic solder. Then apply a 5N* force in parallel with the test jig for 10±1 sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. *2N (GJM03) | | | | |

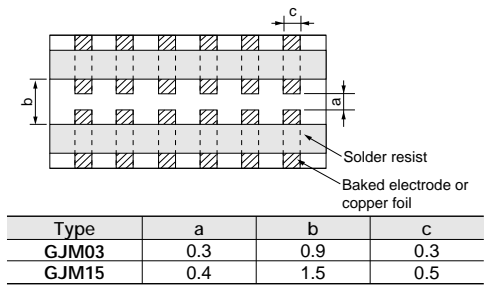




Fig. 1

Continued on the following page.

GJM Series Specifications and Test Methods

Continued from the preceding page.

4
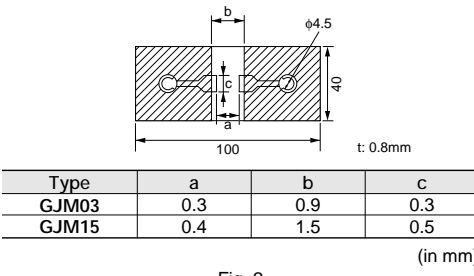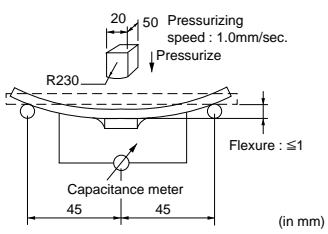
| No. | Item | Specifications | | Test Method | | | | | | | | | | |
|-------|------------------------------|--|-----|---|------|---|---|---|-------|-----|-----|-----|-------|-----|
| | | Temperature Compensating Type | | | | | | | | | | | | |
| 11 | Appearance | No defects or abnormalities | | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | |
| | Q | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400 + 20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | |
| 12 | Appearance | No marking defects | | Solder the capacitor to the test jig (glass epoxy boards) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | |
| | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5pF$ (Whichever is larger) | | | | | | | | | | | | |
| | |  <table border="1" data-bbox="414 808 885 913"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GJM03</td> <td>0.3</td> <td>0.9</td> <td>0.3</td> </tr> <tr> <td>GJM15</td> <td>0.4</td> <td>1.5</td> <td>0.5</td> </tr> </tbody> </table> <p>(in mm)</p> | | | Type | a | b | c | GJM03 | 0.3 | 0.9 | 0.3 | GJM15 | 0.4 |
| Type | a | b | c | | | | | | | | | | | |
| GJM03 | 0.3 | 0.9 | 0.3 | | | | | | | | | | | |
| GJM15 | 0.4 | 1.5 | 0.5 | | | | | | | | | | | |
| | |  <p>(in mm)</p> | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2 ± 0.5 seconds at $230 \pm 5^\circ C$ or Sn-3.0Ag-0.5Cu solder solution for 2 ± 0.5 seconds at $245 \pm 5^\circ C$. | | | | | | | | | | |
| 14 | | The measured and observed characteristics should satisfy the specifications in the following table. | | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at $270 \pm 5^\circ C$ for 10 ± 0.5 seconds. Let sit at room temperature for 24 ± 2 hours. | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25pF$ (Whichever is larger) | | | | | | | | | | | | |
| | Q | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400 + 20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | |
| | I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | | | | | | | | | | | |
| 15 | | The measured and observed characteristics should satisfy the specifications in the following table. | | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24 ± 2 hours at room temperature, then measure. | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25pF$ (Whichever is larger) | | | | | | | | | | | | |
| | Q | 30pF and over: $Q \geq 1000$ 30pF and below: $Q \geq 400 + 20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | |
| | I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | | | | | | | | | | | |
| 16 | | The measured and observed characteristics should satisfy the specifications in the following table. | | Let the capacitor sit at $40 \pm 2^\circ C$ and 90 to 95% humidity for 500 ± 12 hours. Remove and let sit for 24 ± 2 hours (temperature compensating type) at room temperature, then measure. | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5pF$ (Whichever is larger) | | | | | | | | | | | | |
| | Q | 30pF and below: $Q \geq 350$ 10pF and over, 30pF and below: $Q \geq 275 + \frac{C}{5}$ 10pF and below: $Q \geq 200 + 10C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | |
| | I.R. | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | | | | | | | | | | | | |

| Step | 1 | 2 | 3 | 4 |
|-------------|------------------------------|------------|------------------------------|------------|
| Temp. (°C) | Min. Operating Temp. ± 3 | Room Temp. | Max. Operating Temp. ± 3 | Room Temp. |
| Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |

Continued on the following page.

GJM Series Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | | Test Method |
|-----|-----------------------|---|---|---|
| | | Temperature Compensating Type | | |
| 17 | Humidity Load | The measured and observed characteristics should satisfy the specifications in the following table. | | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. |
| | | Appearance | No marking defects | |
| | | Capacitance Change | Within ±7.5% or ±0.75pF (Whichever is larger) | |
| | | Q | 30pF and over: Q≥200 30pF and below: Q≥100+ $\frac{1}{C}$ C C: Nominal Capacitance (pF) | |
| | I.R. | More than 500MΩ or 25Ω · F (Whichever is smaller) | | |
| 18 | High Temperature Load | The measured and observed characteristics should satisfy the specifications in the following table. | | Apply 200% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours (temperature compensating type) at room temperature, then measure. The charge/discharge current is less than 50mA. |
| | | Appearance | No marking defects | |
| | | Capacitance Change | Within ±3% or ±0.3pF (Whichever is larger) | |
| | | Q | 30pF and over: Q≥350 10pF and over, 30pF and below: Q≥275+ $\frac{1}{C}$ C 10pF and below: Q≥200+10C C: Nominal Capacitance (pF) | |
| | I.R. | More than 1,000MΩ or 50Ω · F (Whichever is smaller) | | |
| 19 | ESR | 0.1pF<C≤1pF: 350mΩ · pF below 1pF<C≤5pF: 300mΩ below 5pF<C≤10pF: 250mΩ below | | The ESR should be measured at room temperature, and frequency 1±0.2GHz with the equivalent of BOONTON Model 34A. |
| | | 10pF<C≤33pF: 400mΩ below | | The ESR should be measured at room temperature, and frequency 500±50MHz with the equivalent of HP8753B. |

4

Table A
(1)

| Char. Code | Temp. Coeff. (ppm/°C) *1 | Capacitance Change from 25°C Value (%) | | | | | |
|------------|--------------------------|--|-------|-------|-------|-------|-------|
| | | -55°C | | -30°C | | -10°C | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C | 0±30 | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |
| 6C | 0±60 | 0.87 | -0.48 | 0.60 | -0.33 | 0.38 | -0.21 |

*1: Nominal values denote the temperature coefficient within a range of 25 to 125°C.

(2)

| Char. | Nominal Values (ppm/°C) *2 | Capacitance Change from 20°C Value (%) | | | | | |
|-------|----------------------------|--|-------|-------|-------|-------|-------|
| | | -55°C | | -25°C | | -10°C | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 2C | 0±60 | 0.82 | -0.45 | 0.49 | -0.27 | 0.33 | -0.18 |
| 3C | 0±120 | 1.37 | -0.90 | 0.82 | -0.54 | 0.55 | -0.36 |
| 4C | 0±250 | 2.56 | -1.88 | 1.54 | -1.13 | 1.02 | -0.75 |

*2: Nominal values denote the temperature coefficient within a range of 20 to 125°C.


Chip Monolithic Ceramic Capacitors



High Frequency GQM Series

■ Features

1. HiQ and low ESR at VHF, UHF, Microwave
2. Feature improvement, low power consumption for mobile telecommunication. (Base station, terminal, etc.)

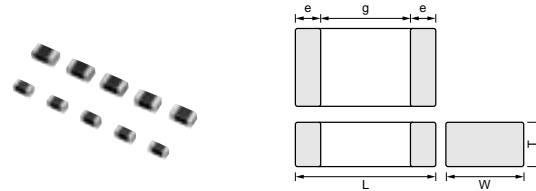

■ Applications

High frequency circuit (Mobile telecommunication, etc.)

| Part Number | Dimensions (mm) | | | | |
|-------------------------|-----------------|------------|------------|------------|--------|
| | L | W | T | e | g min. |
| GQM187 | 1.6 ±0.15 | 0.8 ±0.15 | 0.7 ±0.1 | 0.2 to 0.5 | 0.5 |
| GQM188 | 1.6 ±0.1 | 0.8 ±0.1 | 0.8 ±0.1 | 0.2 to 0.5 | 0.5 |
| GQM219 (50,100V) | 2.0 ±0.1 | 1.25 ±0.1 | 0.85 ±0.1 | 0.2 to 0.7 | 0.7 |
| GQM219 (250V) | 2.0 ±0.15 | 1.25 ±0.15 | 0.85 ±0.15 | 0.2 to 0.7 | 0.7 |

Capacitance Table

Temperature Compensating Type C0G(5C) Characteristics

7 ex.7: T Dimension [mm]

| Capacitance | TC | LxW [mm] | C0G(5C) | | | | | | | |
|-------------|----|----------|---------------------|----------|----------|----------------------|----------|----------|---------|--|
| | | | 1.6x0.8 (18) <0603> | | | 2.0x1.25 (21) <0805> | | | | |
| | | | Rated Voltage [Vdc] | 250 (2E) | 100 (2A) | 50 (1H) | 250 (2E) | 100 (2A) | 50 (1H) | |
| 0.10pF(R10) | 7 | | | | | | | | | |
| 0.20pF(R20) | 7 | | | | | | | | | |
| 0.30pF(R30) | 7 | | | | | | | | | |
| 0.40pF(R40) | 7 | | | | | | | | | |
| 0.50pF(R50) | 7 | 8 | | | | 9 | 9 | | | |
| 0.75pF(R75) | 7 | 8 | | | | 9 | 9 | | | |
| 1.0pF(1R0) | 7 | 8 | | | | 9 | 9 | | | |
| 1.1pF(1R1) | 7 | 8 | | | | 9 | 9 | | | |
| 1.2pF(1R2) | 7 | 8 | | | | 9 | 9 | | | |
| 1.3pF(1R3) | 7 | 8 | | | | 9 | 9 | | | |
| 1.5pF(1R5) | 7 | 8 | | | | 9 | 9 | | | |
| 1.6pF(1R6) | 7 | 8 | | | | 9 | 9 | | | |
| 1.8pF(1R8) | 7 | 8 | | | | 9 | 9 | | | |
| 2.0pF(2R0) | 7 | 8 | | | | 9 | 9 | | | |
| 2.2pF(2R2) | 7 | 8 | | | | 9 | 9 | | | |
| 2.4pF(2R4) | 7 | 8 | | | | 9 | 9 | | | |
| 2.7pF(2R7) | 7 | 8 | | | | 9 | 9 | | | |
| 3.0pF(3R0) | 7 | 8 | | | | 9 | 9 | | | |
| 3.3pF(3R3) | 7 | 8 | | | | 9 | 9 | | | |
| 3.6pF(3R6) | 7 | 8 | | | | 9 | 9 | | | |
| 3.9pF(3R9) | 7 | 8 | | | | 9 | 9 | | | |
| 4.0pF(4R0) | 7 | 8 | | | | 9 | 9 | | | |
| 4.3pF(4R3) | 7 | 8 | | | | 9 | 9 | | | |
| 4.7pF(4R7) | 7 | 8 | | | | 9 | 9 | | | |
| 5.0pF(5R0) | 7 | 8 | | | | 9 | 9 | | | |
| 5.1pF(5R1) | 7 | 8 | | | | 9 | 9 | | | |
| 5.6pF(5R6) | 7 | 8 | | | | 9 | 9 | | | |
| 6.0pF(6R0) | 7 | 8 | | | | 9 | 9 | | | |
| 6.2pF(6R2) | 7 | 8 | | | | 9 | 9 | | | |
| 6.8pF(6R8) | 7 | 8 | | | | 9 | 9 | | | |
| 7.0pF(7R0) | 7 | | 8 | | | 9 | 9 | | | |

| Capacitance | TC | LxW [mm] | C0G(5C) | | | | | | | |
|-------------|----|----------|---------------------|----------|----------|----------------------|----------|----------|---------|--|
| | | | 1.6x0.8 (18) <0603> | | | 2.0x1.25 (21) <0805> | | | | |
| | | | Rated Voltage [Vdc] | 250 (2E) | 100 (2A) | 50 (1H) | 250 (2E) | 100 (2A) | 50 (1H) | |
| 7.5pF(7R5) | 7 | | | | | 8 | 9 | 9 | | |
| 8.0pF(8R0) | 7 | | | | | 8 | 9 | 9 | | |
| 8.2pF(8R2) | 7 | | | | | 8 | 9 | 9 | | |
| 9.0pF(9R0) | 7 | | | | | 8 | 9 | 9 | | |
| 9.1pF(9R1) | 7 | | | | | 8 | 9 | 9 | | |
| 10pF(100) | 7 | | | | | 8 | 9 | 9 | | |
| 11pF(110) | 7 | | | | | 8 | 9 | 9 | | |
| 12pF(120) | 7 | | | | | 8 | 9 | 9 | | |
| 13pF(130) | 7 | | | | | 8 | 9 | 9 | | |
| 15pF(150) | 7 | | | | | 8 | 9 | 9 | | |
| 16pF(160) | 7 | | | | | 8 | 9 | 9 | | |
| 18pF(180) | 7 | | | | | 8 | 9 | 9 | | |
| 20pF(200) | 7 | | | | | 8 | 9 | | 9 | |
| 22pF(220) | 7 | | | | | 8 | 9 | | 9 | |
| 24pF(240) | 7 | | | | | 8 | 9 | | 9 | |
| 27pF(270) | 7 | | | | | 8 | 9 | | 9 | |
| 30pF(300) | 7 | | | | | 8 | 9 | | 9 | |
| 33pF(330) | 7 | | | | | 8 | 9 | | 9 | |
| 36pF(360) | 7 | | | | | 8 | 9 | | 9 | |
| 39pF(390) | 7 | | | | | 8 | 9 | | 9 | |
| 43pF(430) | 7 | | | | | 8 | 9 | | 9 | |
| 47pF(470) | 7 | | | | | 8 | 9 | | 9 | |
| 51pF(510) | | | | | | 8 | 9 | | 9 | |
| 56pF(560) | | | | | | 8 | 9 | | 9 | |
| 62pF(620) | | | | | | 8 | 9 | | 9 | |
| 68pF(680) | | | | | | 8 | 9 | | 9 | |
| 75pF(750) | | | | | | 8 | 9 | | 9 | |
| 82pF(820) | | | | | | 8 | 9 | | 9 | |
| 91pF(910) | | | | | | 8 | 9 | | 9 | |
| 100pF(101) | | | | | | 8 | 9 | | 9 | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 100(2A) |
| Capacitance | Tolerance | Part Number | |
| 0.10pF(R10) | ±0.1pF(B) | GQM1875C2ER10BB12D | |
| 0.20pF(R20) | ±0.1pF(B) | GQM1875C2ER20BB12D | |
| 0.30pF(R30) | ±0.1pF(B) | GQM1875C2ER30BB12D | |
| | ±0.25pF(C) | GQM1875C2ER30CB12D | |
| 0.40pF(R40) | ±0.1pF(B) | GQM1875C2ER40BB12D | |
| | ±0.25pF(C) | GQM1875C2ER40CB12D | |
| 0.50pF(R50) | ±0.1pF(B) | GQM1875C2ER50BB12D | GQM1885C2AR50BB01D |
| | ±0.25pF(C) | GQM1875C2ER50CB12D | GQM1885C2AR50CB01D |
| 0.75pF(R75) | ±0.1pF(B) | GQM1875C2ER75BB12D | GQM1885C2AR75BB01D |
| | ±0.25pF(C) | GQM1875C2ER75CB12D | GQM1885C2AR75CB01D |
| 1.0pF(1R0) | ±0.1pF(B) | GQM1875C2E1R0BB12D | GQM1885C2A1R0BB01D |
| | ±0.25pF(C) | GQM1875C2E1R0CB12D | GQM1885C2A1R0CB01D |
| 1.1pF(1R1) | ±0.1pF(B) | GQM1875C2E1R1BB12D | GQM1885C2A1R1BB01D |
| | ±0.25pF(C) | GQM1875C2E1R1CB12D | GQM1885C2A1R1CB01D |
| 1.2pF(1R2) | ±0.1pF(B) | GQM1875C2E1R2BB12D | GQM1885C2A1R2BB01D |
| | ±0.25pF(C) | GQM1875C2E1R2CB12D | GQM1885C2A1R2CB01D |
| 1.3pF(1R3) | ±0.1pF(B) | GQM1875C2E1R3BB12D | GQM1885C2A1R3BB01D |
| | ±0.25pF(C) | GQM1875C2E1R3CB12D | GQM1885C2A1R3CB01D |
| 1.5pF(1R5) | ±0.1pF(B) | GQM1875C2E1R5BB12D | GQM1885C2A1R5BB01D |
| | ±0.25pF(C) | GQM1875C2E1R5CB12D | GQM1885C2A1R5CB01D |
| 1.6pF(1R6) | ±0.1pF(B) | GQM1875C2E1R6BB12D | GQM1885C2A1R6BB01D |
| | ±0.25pF(C) | GQM1875C2E1R6CB12D | GQM1885C2A1R6CB01D |
| 1.8pF(1R8) | ±0.1pF(B) | GQM1875C2E1R8BB12D | GQM1885C2A1R8BB01D |
| | ±0.25pF(C) | GQM1875C2E1R8CB12D | GQM1885C2A1R8CB01D |
| 2.0pF(2R0) | ±0.1pF(B) | GQM1875C2E2R0BB12D | GQM1885C2A2R0BB01D |
| | ±0.25pF(C) | GQM1875C2E2R0CB12D | GQM1885C2A2R0CB01D |
| 2.2pF(2R2) | ±0.1pF(B) | GQM1875C2E2R2BB12D | GQM1885C2A2R2BB01D |
| | ±0.25pF(C) | GQM1875C2E2R2CB12D | GQM1885C2A2R2CB01D |
| 2.4pF(2R4) | ±0.1pF(B) | GQM1875C2E2R4BB12D | GQM1885C2A2R4BB01D |
| | ±0.25pF(C) | GQM1875C2E2R4CB12D | GQM1885C2A2R4CB01D |
| 2.7pF(2R7) | ±0.1pF(B) | GQM1875C2E2R7BB12D | GQM1885C2A2R7BB01D |
| | ±0.25pF(C) | GQM1875C2E2R7CB12D | GQM1885C2A2R7CB01D |
| 3.0pF(3R0) | ±0.1pF(B) | GQM1875C2E3R0BB12D | GQM1885C2A3R0BB01D |
| | ±0.25pF(C) | GQM1875C2E3R0CB12D | GQM1885C2A3R0CB01D |
| 3.3pF(3R3) | ±0.1pF(B) | GQM1875C2E3R3BB12D | GQM1885C2A3R3BB01D |
| | ±0.25pF(C) | GQM1875C2E3R3CB12D | GQM1885C2A3R3CB01D |
| 3.6pF(3R6) | ±0.1pF(B) | GQM1875C2E3R6BB12D | GQM1885C2A3R6BB01D |
| | ±0.25pF(C) | GQM1875C2E3R6CB12D | GQM1885C2A3R6CB01D |
| 3.9pF(3R9) | ±0.1pF(B) | GQM1875C2E3R9BB12D | GQM1885C2A3R9BB01D |
| | ±0.25pF(C) | GQM1875C2E3R9CB12D | GQM1885C2A3R9CB01D |
| 4.0pF(4R0) | ±0.1pF(B) | GQM1875C2E4R0BB12D | GQM1885C2A4R0BB01D |
| | ±0.25pF(C) | GQM1875C2E4R0CB12D | GQM1885C2A4R0CB01D |
| 4.3pF(4R3) | ±0.1pF(B) | GQM1875C2E4R3BB12D | GQM1885C2A4R3BB01D |
| | ±0.25pF(C) | GQM1875C2E4R3CB12D | GQM1885C2A4R3CB01D |
| 4.7pF(4R7) | ±0.1pF(B) | GQM1875C2E4R7BB12D | GQM1885C2A4R7BB01D |
| | ±0.25pF(C) | GQM1875C2E4R7CB12D | GQM1885C2A4R7CB01D |
| 5.0pF(5R0) | ±0.1pF(B) | GQM1875C2E5R0BB12D | GQM1885C2A5R0BB01D |
| | ±0.25pF(C) | GQM1875C2E5R0CB12D | GQM1885C2A5R0CB01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GQ** **M** **18** **7** **5C** **2E** **R10** **B** **B12** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | | |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 5.1pF(5R1) | ±0.25pF(C) | GQM1875C2E5R1CB12D | GQM1885C2A5R1CB01D | |
| | ±0.5pF(D) | GQM1875C2E5R1DB12D | GQM1885C2A5R1DB01D | |
| 5.6pF(5R6) | ±0.25pF(C) | GQM1875C2E5R6CB12D | GQM1885C2A5R6CB01D | |
| | ±0.5pF(D) | GQM1875C2E5R6DB12D | GQM1885C2A5R6DB01D | |
| 6.0pF(6R0) | ±0.25pF(C) | GQM1875C2E6R0CB12D | GQM1885C2A6R0CB01D | |
| | ±0.5pF(D) | GQM1875C2E6R0DB12D | GQM1885C2A6R0DB01D | |
| 6.2pF(6R2) | ±0.25pF(C) | GQM1875C2E6R2CB12D | GQM1885C2A6R2CB01D | |
| | ±0.5pF(D) | GQM1875C2E6R2DB12D | GQM1885C2A6R2DB01D | |
| 6.8pF(6R8) | ±0.25pF(C) | GQM1875C2E6R8CB12D | GQM1885C2A6R8CB01D | |
| | ±0.5pF(D) | GQM1875C2E6R8DB12D | GQM1885C2A6R8DB01D | |
| 7.0pF(7R0) | ±0.25pF(C) | GQM1875C2E7R0CB12D | | GQM1885C1H7R0CB01D |
| | ±0.5pF(D) | GQM1875C2E7R0DB12D | | GQM1885C1H7R0DB01D |
| 7.5pF(7R5) | ±0.25pF(C) | GQM1875C2E7R5CB12D | | GQM1885C1H7R5CB01D |
| | ±0.5pF(D) | GQM1875C2E7R5DB12D | | GQM1885C1H7R5DB01D |
| 8.0pF(8R0) | ±0.25pF(C) | GQM1875C2E8R0CB12D | | GQM1885C1H8R0CB01D |
| | ±0.5pF(D) | GQM1875C2E8R0DB12D | | GQM1885C1H8R0DB01D |
| 8.2pF(8R2) | ±0.25pF(C) | GQM1875C2E8R2CB12D | | GQM1885C1H8R2CB01D |
| | ±0.5pF(D) | GQM1875C2E8R2DB12D | | GQM1885C1H8R2DB01D |
| 9.0pF(9R0) | ±0.25pF(C) | GQM1875C2E9R0CB12D | | GQM1885C1H9R0CB01D |
| | ±0.5pF(D) | GQM1875C2E9R0DB12D | | GQM1885C1H9R0DB01D |
| 9.1pF(9R1) | ±0.25pF(C) | GQM1875C2E9R1CB12D | | GQM1885C1H9R1CB01D |
| | ±0.5pF(D) | GQM1875C2E9R1DB12D | | GQM1885C1H9R1DB01D |
| 10pF(100) | ±2%(G) | GQM1875C2E100GB12D | | GQM1885C1H100GB01D |
| | ±5%(J) | GQM1875C2E100JB12D | | GQM1885C1H100JB01D |
| 11pF(110) | ±2%(G) | GQM1875C2E110GB12D | | GQM1885C1H110GB01D |
| | ±5%(J) | GQM1875C2E110JB12D | | GQM1885C1H110JB01D |
| 12pF(120) | ±2%(G) | GQM1875C2E120GB12D | | GQM1885C1H120GB01D |
| | ±5%(J) | GQM1875C2E120JB12D | | GQM1885C1H120JB01D |
| 13pF(130) | ±2%(G) | GQM1875C2E130GB12D | | GQM1885C1H130GB01D |
| | ±5%(J) | GQM1875C2E130JB12D | | GQM1885C1H130JB01D |
| 15pF(150) | ±2%(G) | GQM1875C2E150GB12D | | GQM1885C1H150GB01D |
| | ±5%(J) | GQM1875C2E150JB12D | | GQM1885C1H150JB01D |
| 16pF(160) | ±2%(G) | GQM1875C2E160GB12D | | GQM1885C1H160GB01D |
| | ±5%(J) | GQM1875C2E160JB12D | | GQM1885C1H160JB01D |
| 18pF(180) | ±2%(G) | GQM1875C2E180GB12D | | GQM1885C1H180GB01D |
| | ±5%(J) | GQM1875C2E180JB12D | | GQM1885C1H180JB01D |
| 20pF(200) | ±2%(G) | GQM1875C2E200GB12D | | GQM1885C1H200GB01D |
| | ±5%(J) | GQM1875C2E200JB12D | | GQM1885C1H200JB01D |
| 22pF(220) | ±2%(G) | GQM1875C2E220GB12D | | GQM1885C1H220GB01D |
| | ±5%(J) | GQM1875C2E220JB12D | | GQM1885C1H220JB01D |
| 24pF(240) | ±2%(G) | GQM1875C2E240GB12D | | GQM1885C1H240GB01D |
| | ±5%(J) | GQM1875C2E240JB12D | | GQM1885C1H240JB01D |
| 27pF(270) | ±2%(G) | GQM1875C2E270GB12D | | GQM1885C1H270GB01D |
| | ±5%(J) | GQM1875C2E270JB12D | | GQM1885C1H270JB01D |
| 30pF(300) | ±2%(G) | GQM1875C2E300GB12D | | GQM1885C1H300GB01D |
| | ±5%(J) | GQM1875C2E300JB12D | | GQM1885C1H300JB01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) **GQ** **M** **18** **7** **5C** **2E** **5R1** **C** **B12** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series
 ⑤ Temperature Characteristics ⑥ Dimension (LxW)
 ⑦ Capacitance Tolerance ⑧ Rated Voltage
 ⑨ Individual Specification Code ⑩ Dimension (T)
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | |
|-------------------|-----------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 33pF(330) | ±2%(G) | GQM1875C2E330GB12D | GQM1885C1H330GB01D |
| | ±5%(J) | GQM1875C2E330JB12D | GQM1885C1H330JB01D |
| 36pF(360) | ±2%(G) | GQM1875C2E360GB12D | GQM1885C1H360GB01D |
| | ±5%(J) | GQM1875C2E360JB12D | GQM1885C1H360JB01D |
| 39pF(390) | ±2%(G) | GQM1875C2E390GB12D | GQM1885C1H390GB01D |
| | ±5%(J) | GQM1875C2E390JB12D | GQM1885C1H390JB01D |
| 43pF(430) | ±2%(G) | GQM1875C2E430GB12D | GQM1885C1H430GB01D |
| | ±5%(J) | GQM1875C2E430JB12D | GQM1885C1H430JB01D |
| 47pF(470) | ±2%(G) | GQM1875C2E470GB12D | GQM1885C1H470GB01D |
| | ±5%(J) | GQM1875C2E470JB12D | GQM1885C1H470JB01D |
| 51pF(510) | ±2%(G) | | GQM1885C1H510GB01D |
| | ±5%(J) | | GQM1885C1H510JB01D |
| 56pF(560) | ±2%(G) | | GQM1885C1H560GB01D |
| | ±5%(J) | | GQM1885C1H560JB01D |
| 62pF(620) | ±2%(G) | | GQM1885C1H620GB01D |
| | ±5%(J) | | GQM1885C1H620JB01D |
| 68pF(680) | ±2%(G) | | GQM1885C1H680GB01D |
| | ±5%(J) | | GQM1885C1H680JB01D |
| 75pF(750) | ±2%(G) | | GQM1885C1H750GB01D |
| | ±5%(J) | | GQM1885C1H750JB01D |
| 82pF(820) | ±2%(G) | | GQM1885C1H820GB01D |
| | ±5%(J) | | GQM1885C1H820JB01D |
| 91pF(910) | ±2%(G) | | GQM1885C1H910GB01D |
| | ±5%(J) | | GQM1885C1H910JB01D |
| 100pF(101) | ±2%(G) | | GQM1885C1H101GB01D |
| | ±5%(J) | | GQM1885C1H101JB01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 100(2A) |
| Capacitance | Tolerance | Part Number | |
| 0.50pF(R50) | ±0.1pF(B) | GQM2195C2ER50BB12D | GQM2195C2AR50BB01D |
| | ±0.25pF(C) | GQM2195C2ER50CB12D | GQM2195C2AR50CB01D |
| 0.75pF(R75) | ±0.1pF(B) | GQM2195C2ER75BB12D | GQM2195C2AR75BB01D |
| | ±0.25pF(C) | GQM2195C2ER75CB12D | GQM2195C2AR75CB01D |
| 1.0pF(1R0) | ±0.1pF(B) | GQM2195C2E1R0BB12D | GQM2195C2A1R0BB01D |
| | ±0.25pF(C) | GQM2195C2E1R0CB12D | GQM2195C2A1R0CB01D |
| 1.1pF(1R1) | ±0.1pF(B) | GQM2195C2E1R1BB12D | GQM2195C2A1R1BB01D |
| | ±0.25pF(C) | GQM2195C2E1R1CB12D | GQM2195C2A1R1CB01D |
| 1.2pF(1R2) | ±0.1pF(B) | GQM2195C2E1R2BB12D | GQM2195C2A1R2BB01D |
| | ±0.25pF(C) | GQM2195C2E1R2CB12D | GQM2195C2A1R2CB01D |
| 1.3pF(1R3) | ±0.1pF(B) | GQM2195C2E1R3BB12D | GQM2195C2A1R3BB01D |
| | ±0.25pF(C) | GQM2195C2E1R3CB12D | GQM2195C2A1R3CB01D |
| 1.5pF(1R5) | ±0.1pF(B) | GQM2195C2E1R5BB12D | GQM2195C2A1R5BB01D |
| | ±0.25pF(C) | GQM2195C2E1R5CB12D | GQM2195C2A1R5CB01D |
| 1.6pF(1R6) | ±0.1pF(B) | GQM2195C2E1R6BB12D | GQM2195C2A1R6BB01D |
| | ±0.25pF(C) | GQM2195C2E1R6CB12D | GQM2195C2A1R6CB01D |
| 1.8pF(1R8) | ±0.1pF(B) | GQM2195C2E1R8BB12D | GQM2195C2A1R8BB01D |
| | ±0.25pF(C) | GQM2195C2E1R8CB12D | GQM2195C2A1R8CB01D |
| 2.0pF(2R0) | ±0.1pF(B) | GQM2195C2E2R0BB12D | GQM2195C2A2R0BB01D |
| | ±0.25pF(C) | GQM2195C2E2R0CB12D | GQM2195C2A2R0CB01D |
| 2.2pF(2R2) | ±0.1pF(B) | GQM2195C2E2R2BB12D | GQM2195C2A2R2BB01D |
| | ±0.25pF(C) | GQM2195C2E2R2CB12D | GQM2195C2A2R2CB01D |
| 2.4pF(2R4) | ±0.1pF(B) | GQM2195C2E2R4BB12D | GQM2195C2A2R4BB01D |
| | ±0.25pF(C) | GQM2195C2E2R4CB12D | GQM2195C2A2R4CB01D |
| 2.7pF(2R7) | ±0.1pF(B) | GQM2195C2E2R7BB12D | GQM2195C2A2R7BB01D |
| | ±0.25pF(C) | GQM2195C2E2R7CB12D | GQM2195C2A2R7CB01D |
| 3.0pF(3R0) | ±0.1pF(B) | GQM2195C2E3R0BB12D | GQM2195C2A3R0BB01D |
| | ±0.25pF(C) | GQM2195C2E3R0CB12D | GQM2195C2A3R0CB01D |
| 3.3pF(3R3) | ±0.1pF(B) | GQM2195C2E3R3BB12D | GQM2195C2A3R3BB01D |
| | ±0.25pF(C) | GQM2195C2E3R3CB12D | GQM2195C2A3R3CB01D |
| 3.6pF(3R6) | ±0.1pF(B) | GQM2195C2E3R6BB12D | GQM2195C2A3R6BB01D |
| | ±0.25pF(C) | GQM2195C2E3R6CB12D | GQM2195C2A3R6CB01D |
| 3.9pF(3R9) | ±0.1pF(B) | GQM2195C2E3R9BB12D | GQM2195C2A3R9BB01D |
| | ±0.25pF(C) | GQM2195C2E3R9CB12D | GQM2195C2A3R9CB01D |
| 4.0pF(4R0) | ±0.1pF(B) | GQM2195C2E4R0BB12D | GQM2195C2A4R0BB01D |
| | ±0.25pF(C) | GQM2195C2E4R0CB12D | GQM2195C2A4R0CB01D |
| 4.3pF(4R3) | ±0.1pF(B) | GQM2195C2E4R3BB12D | GQM2195C2A4R3BB01D |
| | ±0.25pF(C) | GQM2195C2E4R3CB12D | GQM2195C2A4R3CB01D |
| 4.7pF(4R7) | ±0.1pF(B) | GQM2195C2E4R7BB12D | GQM2195C2A4R7BB01D |
| | ±0.25pF(C) | GQM2195C2E4R7CB12D | GQM2195C2A4R7CB01D |
| 5.0pF(5R0) | ±0.1pF(B) | GQM2195C2E5R0BB12D | GQM2195C2A5R0BB01D |
| | ±0.25pF(C) | GQM2195C2E5R0CB12D | GQM2195C2A5R0CB01D |
| 5.1pF(5R1) | ±0.25pF(C) | GQM2195C2E5R1CB12D | GQM2195C2A5R1CB01D |
| | ±0.5pF(D) | GQM2195C2E5R1DB12D | GQM2195C2A5R1DB01D |
| 5.6pF(5R6) | ±0.25pF(C) | GQM2195C2E5R6CB12D | GQM2195C2A5R6CB01D |
| | ±0.5pF(D) | GQM2195C2E5R6DB12D | GQM2195C2A5R6DB01D |
| 6.0pF(6R0) | ±0.25pF(C) | GQM2195C2E6R0CB12D | GQM2195C2A6R0CB01D |
| | ±0.5pF(D) | GQM2195C2E6R0DB12D | GQM2195C2A6R0DB01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) **GQ** **M** **21** **9** **5C** **2E** **R50** **B** **B12** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID
 ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | | |
|-------------------|------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 100(2A) | 50(1H) |
| Capacitance | Tolerance | Part Number | | |
| 6.2pF(6R2) | ±0.25pF(C) | GQM2195C2E6R2CB12D | GQM2195C2A6R2CB01D | |
| | ±0.5pF(D) | GQM2195C2E6R2DB12D | GQM2195C2A6R2DB01D | |
| 6.8pF(6R8) | ±0.25pF(C) | GQM2195C2E6R8CB12D | GQM2195C2A6R8CB01D | |
| | ±0.5pF(D) | GQM2195C2E6R8DB12D | GQM2195C2A6R8DB01D | |
| 7.0pF(7R0) | ±0.25pF(C) | GQM2195C2E7R0CB12D | GQM2195C2A7R0CB01D | |
| | ±0.5pF(D) | GQM2195C2E7R0DB12D | GQM2195C2A7R0DB01D | |
| 7.5pF(7R5) | ±0.25pF(C) | GQM2195C2E7R5CB12D | GQM2195C2A7R5CB01D | |
| | ±0.5pF(D) | GQM2195C2E7R5DB12D | GQM2195C2A7R5DB01D | |
| 8.0pF(8R0) | ±0.25pF(C) | GQM2195C2E8R0CB12D | GQM2195C2A8R0CB01D | |
| | ±0.5pF(D) | GQM2195C2E8R0DB12D | GQM2195C2A8R0DB01D | |
| 8.2pF(8R2) | ±0.25pF(C) | GQM2195C2E8R2CB12D | GQM2195C2A8R2CB01D | |
| | ±0.5pF(D) | GQM2195C2E8R2DB12D | GQM2195C2A8R2DB01D | |
| 9.0pF(9R0) | ±0.25pF(C) | GQM2195C2E9R0CB12D | GQM2195C2A9R0CB01D | |
| | ±0.5pF(D) | GQM2195C2E9R0DB12D | GQM2195C2A9R0DB01D | |
| 9.1pF(9R1) | ±0.25pF(C) | GQM2195C2E9R1CB12D | GQM2195C2A9R1CB01D | |
| | ±0.5pF(D) | GQM2195C2E9R1DB12D | GQM2195C2A9R1DB01D | |
| 10pF(100) | ±2%(G) | GQM2195C2E100GB12D | GQM2195C2A100GB01D | |
| | ±5%(J) | GQM2195C2E100JB12D | GQM2195C2A100JB01D | |
| 11pF(110) | ±2%(G) | GQM2195C2E110GB12D | GQM2195C2A110GB01D | |
| | ±5%(J) | GQM2195C2E110JB12D | GQM2195C2A110JB01D | |
| 12pF(120) | ±2%(G) | GQM2195C2E120GB12D | GQM2195C2A120GB01D | |
| | ±5%(J) | GQM2195C2E120JB12D | GQM2195C2A120JB01D | |
| 13pF(130) | ±2%(G) | GQM2195C2E130GB12D | GQM2195C2A130GB01D | |
| | ±5%(J) | GQM2195C2E130JB12D | GQM2195C2A130JB01D | |
| 15pF(150) | ±2%(G) | GQM2195C2E150GB12D | GQM2195C2A150GB01D | |
| | ±5%(J) | GQM2195C2E150JB12D | GQM2195C2A150JB01D | |
| 16pF(160) | ±2%(G) | GQM2195C2E160GB12D | GQM2195C2A160GB01D | |
| | ±5%(J) | GQM2195C2E160JB12D | GQM2195C2A160JB01D | |
| 18pF(180) | ±2%(G) | GQM2195C2E180GB12D | GQM2195C2A180GB01D | |
| | ±5%(J) | GQM2195C2E180JB12D | GQM2195C2A180JB01D | |
| 20pF(200) | ±2%(G) | GQM2195C2E200GB12D | | GQM2195C1H200GB01D |
| | ±5%(J) | GQM2195C2E200JB12D | | GQM2195C1H200JB01D |
| 22pF(220) | ±2%(G) | GQM2195C2E220GB12D | | GQM2195C1H220GB01D |
| | ±5%(J) | GQM2195C2E220JB12D | | GQM2195C1H220JB01D |
| 24pF(240) | ±2%(G) | GQM2195C2E240GB12D | | GQM2195C1H240GB01D |
| | ±5%(J) | GQM2195C2E240JB12D | | GQM2195C1H240JB01D |
| 27pF(270) | ±2%(G) | GQM2195C2E270GB12D | | GQM2195C1H270GB01D |
| | ±5%(J) | GQM2195C2E270JB12D | | GQM2195C1H270JB01D |
| 30pF(300) | ±2%(G) | GQM2195C2E300GB12D | | GQM2195C1H300GB01D |
| | ±5%(J) | GQM2195C2E300JB12D | | GQM2195C1H300JB01D |
| 33pF(330) | ±2%(G) | GQM2195C2E330GB12D | | GQM2195C1H330GB01D |
| | ±5%(J) | GQM2195C2E330JB12D | | GQM2195C1H330JB01D |
| 36pF(360) | ±2%(G) | GQM2195C2E360GB12D | | GQM2195C1H360GB01D |
| | ±5%(J) | GQM2195C2E360JB12D | | GQM2195C1H360JB01D |
| 39pF(390) | ±2%(G) | GQM2195C2E390GB12D | | GQM2195C1H390GB01D |
| | ±5%(J) | GQM2195C2E390JB12D | | GQM2195C1H390JB01D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 2.0x1.25(21)<0805> | |
|-------------------|-----------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 50(1H) |
| Capacitance | Tolerance | Part Number | |
| 43pF(430) | ±2%(G) | GQM2195C2E430GB12D | GQM2195C1H430GB01D |
| | ±5%(J) | GQM2195C2E430JB12D | GQM2195C1H430JB01D |
| 47pF(470) | ±2%(G) | GQM2195C2E470GB12D | GQM2195C1H470GB01D |
| | ±5%(J) | GQM2195C2E470JB12D | GQM2195C1H470JB01D |
| 51pF(510) | ±2%(G) | GQM2195C2E510GB12D | GQM2195C1H510GB01D |
| | ±5%(J) | GQM2195C2E510JB12D | GQM2195C1H510JB01D |
| 56pF(560) | ±2%(G) | GQM2195C2E560GB12D | GQM2195C1H560GB01D |
| | ±5%(J) | GQM2195C2E560JB12D | GQM2195C1H560JB01D |
| 62pF(620) | ±2%(G) | GQM2195C2E620GB12D | GQM2195C1H620GB01D |
| | ±5%(J) | GQM2195C2E620JB12D | GQM2195C1H620JB01D |
| 68pF(680) | ±2%(G) | GQM2195C2E680GB12D | GQM2195C1H680GB01D |
| | ±5%(J) | GQM2195C2E680JB12D | GQM2195C1H680JB01D |
| 75pF(750) | ±2%(G) | GQM2195C2E750GB12D | GQM2195C1H750GB01D |
| | ±5%(J) | GQM2195C2E750JB12D | GQM2195C1H750JB01D |
| 82pF(820) | ±2%(G) | GQM2195C2E820GB12D | GQM2195C1H820GB01D |
| | ±5%(J) | GQM2195C2E820JB12D | GQM2195C1H820JB01D |
| 91pF(910) | ±2%(G) | GQM2195C2E910GB12D | GQM2195C1H910GB01D |
| | ±5%(J) | GQM2195C2E910JB12D | GQM2195C1H910JB01D |
| 100pF(101) | ±2%(G) | GQM2195C2E101GB12D | GQM2195C1H101GB01D |
| | ±5%(J) | GQM2195C2E101JB12D | GQM2195C1H101JB01D |

The part number code is shown in () and Unit is shown in [. <->: EIA [inch] Code

5

(Part Number) **GQ** **M** **21** **9** **5C** **2E** **430** **G** **B12** **D**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩


① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑧ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

GQM Series Specifications and Test Methods


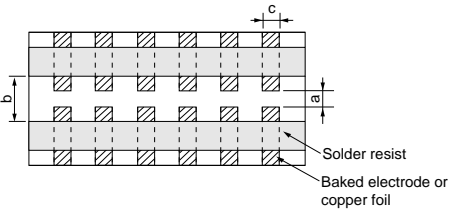
| No. | Item | Specifications | Test Method | | | | | | | | | | | | |
|---|---|--|---|-----------|------------------|---------|--------------------|-------|-------|-----|--------------------|-------|-------|-----|--------------------|
| 1 | Operating Temperature | -55 to 125°C | Reference Temperature: 25°C | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous page. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{AC} or V^{DC} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | |
| 4 | Dimension | Within the specified dimensions | Using calipers | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 300%* of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. *250V only 250% | | | | | | | | | | | | |
| 6 | Insulation Resistance | More than 10,000MΩ | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and 75%RH max. and within 2 minutes of charging. | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/Q should be measured at 25°C at the frequency and voltage shown in the table. | | | | | | | | | | | | |
| 8 | Q | 30pF min.: $Q \geq 1400$ 30pF max.: $Q \geq 800+20C$ C: Nominal Capacitance (pF) | <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Frequency</td> <td>1±0.1MHz</td> </tr> <tr> <td>Voltage</td> <td>0.5 to 5Vrms</td> </tr> </table> | Frequency | 1±0.1MHz | Voltage | 0.5 to 5Vrms | | | | | | | | |
| Frequency | 1±0.1MHz | | | | | | | | | | | | | | |
| Voltage | 0.5 to 5Vrms | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | Capacitance Change | Within the specified tolerance (Table A) | | | | | | | | | | | | |
| | | Temperature Coefficient | Within the specified tolerance (Table A) | | | | | | | | | | | | |
| | | Capacitance Drift | Within ±0.2% or ±0.05pF (Whichever is larger) | | | | | | | | | | | | |
| | | | <p>The temperature coefficient is determined using the capacitance measured in step 3 as a reference.</p> <p>When cycling the temperature sequentially from step 1 through 5 the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as in Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in the steps 1, 3 and 5 by the capacitance value in step 3.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Reference Temp. ±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>Reference Temp. ±2</td> </tr> <tr> <td>4</td> <td>125±3</td> </tr> <tr> <td>5</td> <td>Reference Temp. ±2</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | Reference Temp. ±2 | 2 | -55±3 | 3 | Reference Temp. ±2 | 4 | 125±3 | 5 | Reference Temp. ±2 |
| Step | Temperature (°C) | | | | | | | | | | | | | | |
| 1 | Reference Temp. ±2 | | | | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | | | | |
| 3 | Reference Temp. ±2 | | | | | | | | | | | | | | |
| 4 | 125±3 | | | | | | | | | | | | | | |
| 5 | Reference Temp. ±2 | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | <p>Solder the capacitor to the test jig (glass epoxy board) shown in Fig. 1 using a eutectic solder. Then apply 10N* force in parallel with the test jig for 10±1 sec.</p> <p>The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <p style="text-align: right;">*5N (GQM188)</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GQM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GQM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> </tbody> </table> <p style="text-align: right;">(in mm)</p> | Type | a | b | c | GQM18 | 1.0 | 3.0 | 1.2 | GQM21 | 1.2 | 4.0 | 1.65 |
| | | Type | | a | b | c | | | | | | | | | |
| GQM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | |
| GQM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | |
|  | | Fig. 1 | | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | |
| | | Q | 30pF min.: $Q \geq 1400$ 30pF max.: $Q \geq 800+20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | |
| | | | <p>Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10).</p> <p>The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute.</p> <p>This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours).</p> | | | | | | | | | | | | |

Continued on the following page.

5

GQM Series Specifications and Test Methods

Continued from the preceding page.
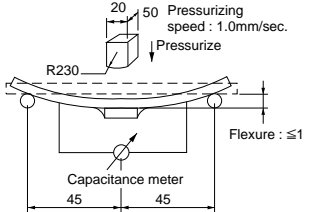
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | |
|---------------------|------------------------------|--|---|------------|---|---|-------|------------|----------------------------|------------|----------------------------|------------|-------------|------|---|------|--------|
| 12 | Appearance | No marking defects | Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2 using a eutectic solder. Then apply a force in the direction shown in Fig. 3. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | |
| | |  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>GQM18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>GQM21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> </tbody> </table> <p style="text-align: right;">(in mm)</p> | Type | a | b | c | GQM18 | 1.0 | 3.0 | 1.2 | GQM21 | 1.2 | 4.0 | 1.65 |  | | |
| Type | a | b | c | | | | | | | | | | | | | | |
| GQM18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | |
| GQM21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in eutectic solder solution for 2 ± 0.5 seconds at $230\pm 5^\circ\text{C}$ or Sn-3.0Ag-0.5Cu solder solution for 2 ± 0.5 seconds at $245\pm 5^\circ\text{C}$. | | | | | | | | | | | | | | |
| 14 | Resistance to Soldering Heat | | The measured and observed characteristics should satisfy the specifications in the following table. | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | |
| | Q | 30pF min.: $Q\geq 1400$ 30pF max.: $Q\geq 800+20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | | | | |
| | I.R. | More than 10,000M Ω | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | Preheat the capacitor at 120 to 150°C for 1 minute. Immerse the capacitor in a eutectic solder or Sn-3.0Ag-0.5Cu solder solution at $270\pm 5^\circ\text{C}$ for 10±0.5 seconds. Let sit at room temperature for 24±2 hours. | | | | | | | | | | | | | | | |
| 15 | Temperature Cycle | | The measured and observed characteristics should satisfy the specifications in the following table. | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | |
| | Q | 30pF min.: $Q\geq 1400$ 30pF max.: $Q\geq 800+20C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | | | | |
| | I.R. | More than 10,000M Ω | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. +0/-3</td> <td>Room Temp.</td> <td>Max. Operating Temp. +3/-0</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |
| Step | 1 | 2 | 3 | 4 | | | | | | | | | | | | | |
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | | | | | | | | | | | | | |
| Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | | | |
| 16 | Humidity Steady State | | The measured and observed characteristics should satisfy the specifications in the following table. | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | |
| | Q | 30pF min.: $Q\geq 350$ 10pF and over, 30pF and below: $Q\geq 275+5C/2$ 10pF max.: $Q\geq 200+10C$ C: Nominal Capacitance (pF) | | | | | | | | | | | | | | | |
| I.R. | More than 1,000M Ω | Let the capacitor sit at $40\pm 2^\circ\text{C}$ and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours (temperature compensating type) at room temperature, then measure. | | | | | | | | | | | | | | | |

Continued on the following page.

GQM Series Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method | |
|-----|-----------------------|---|--|---|
| 17 | Humidity Load | The measured and observed characteristics should satisfy the specifications in the following table. | Apply the rated voltage at 40±2°C and 90 to 95% humidity for 500±12 hours. Remove and let sit for 24±2 hours at room temperature then measure. The charge/discharge current is less than 50mA. | |
| | | Appearance | | No marking defects |
| | | Capacitance Change | | Within ±7.5% or ±0.75pF (Whichever is larger) |
| | | Q | | 30pF min.: $Q \geq 200$ 30pF max.: $Q \geq 100 + 10C/3$ C: Nominal Capacitance (pF) |
| | I.R. | More than 500MΩ | | |
| 18 | High Temperature Load | The measured and observed characteristics should satisfy the specifications in the following table. | Apply 200% of the rated voltage for 1000±12 hours at the maximum operating temperature ±3°C. Let sit for 24±2 hours (temperature compensating type) at room temperature, then measure. The charge/discharge current is less than 50mA. | |
| | | Appearance | | No marking defects |
| | | Capacitance Change | | Within ±3% or ±0.3pF (Whichever is larger) |
| | | Q | | 30pF min.: $Q \geq 350$ 10pF and over, 30pF and below: $Q \geq 275 + 5C/2$ 10pF max.: $Q \geq 200 + 10C$ C: Nominal Capacitance (pF) |
| | I.R. | More than 1,000MΩ | | |

5


Table A

| Char. | Nominal Values (ppm/°C) *1 | Capacitance Change from 25°C (%) | | | | | |
|-------|----------------------------|----------------------------------|-------|-------|-------|-------|-------|
| | | -55°C | | -30°C | | -10°C | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C | 0±30 | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |


*1: Nominal values denote the temperature coefficient within a range of 25 to 125°C.

GQM Series Data

■ Q - Frequency Characteristics

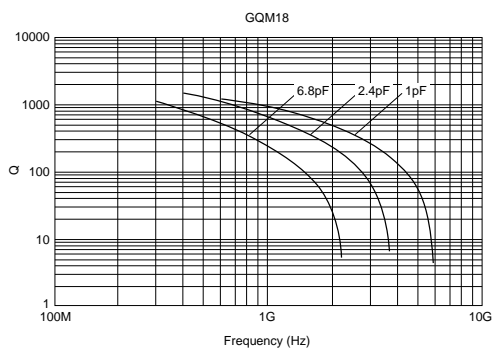

■ Resonant Frequency - Capacitance

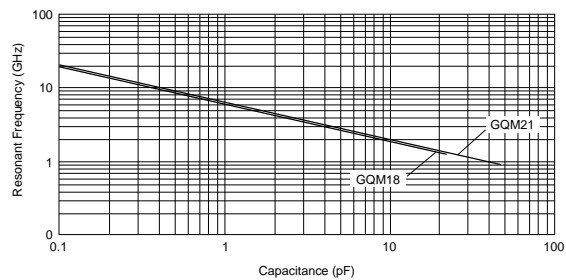

5

Chip Monolithic Ceramic Capacitors




High Frequency Type ERB Series

■ Features (ERB Series)

1. Negligible inductance is achieved by its monolithic structure so the series can be used at frequencies above 1GHz.
2. Nickel barriered terminations of ERB series improve solderability and decrease solder leaching.
3. ERB18/21 series are designed for both flow and reflow soldering and ERB32 series are designed for reflow soldering.

■ Applications

High frequency and high-power circuits

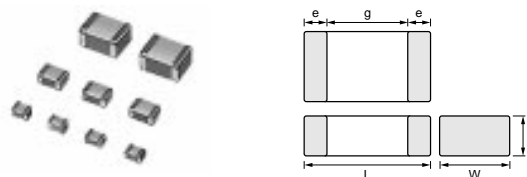

| Part Number | Dimensions (mm) | | | | |
|---------------|-----------------|----------|--------|--------|--------|
| | L | W | T max. | e min. | g min. |
| ERB188 | 1.6±0.1 | 0.8±0.1 | 0.9 | 0.2 | 0.5 |
| ERB21B | 2.0±0.3 | 1.25±0.3 | 1.35 | 0.25 | 0.7 |
| ERB32Q | 3.2±0.3 | 2.5±0.3 | 1.7 | 0.3 | 1.0 |

6

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | | 2.0x1.25(21)<0805> | |
|-------------------|------------|--------------------|--------------------|--------------------|--|
| Rated Volt. [Vdc] | | 250(2E) | | 250(2E) | |
| Capacitance | Tolerance | Part Number | | | |
| 0.50pF(R50) | ±0.1pF(B) | ERB1885C2ER50BDX1D | ERB21B5C2ER50BDX1L | | |
| | ±0.25pF(C) | ERB1885C2ER50CDX1D | ERB21B5C2ER50CDX1L | | |
| 0.75pF(R75) | ±0.1pF(B) | ERB1885C2ER75BDX1D | ERB21B5C2ER75BDX1L | | |
| | ±0.25pF(C) | ERB1885C2ER75CDX1D | ERB21B5C2ER75CDX1L | | |
| 1.0pF(1R0) | ±0.1pF(B) | ERB1885C2E1R0BDX1D | ERB21B5C2E1R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R0CDX1D | ERB21B5C2E1R0CDX1L | | |
| 1.1pF(1R1) | ±0.1pF(B) | ERB1885C2E1R1BDX1D | ERB21B5C2E1R1BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R1CDX1D | ERB21B5C2E1R1CDX1L | | |
| 1.2pF(1R2) | ±0.1pF(B) | ERB1885C2E1R2BDX1D | ERB21B5C2E1R2BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R2CDX1D | ERB21B5C2E1R2CDX1L | | |
| 1.3pF(1R3) | ±0.1pF(B) | ERB1885C2E1R3BDX1D | ERB21B5C2E1R3BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R3CDX1D | ERB21B5C2E1R3CDX1L | | |
| 1.5pF(1R5) | ±0.1pF(B) | ERB1885C2E1R5BDX1D | ERB21B5C2E1R5BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R5CDX1D | ERB21B5C2E1R5CDX1L | | |
| 1.6pF(1R6) | ±0.1pF(B) | ERB1885C2E1R6BDX1D | ERB21B5C2E1R6BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R6CDX1D | ERB21B5C2E1R6CDX1L | | |
| 1.8pF(1R8) | ±0.1pF(B) | ERB1885C2E1R8BDX1D | ERB21B5C2E1R8BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E1R8CDX1D | ERB21B5C2E1R8CDX1L | | |
| 2.0pF(2R0) | ±0.1pF(B) | ERB1885C2E2R0BDX1D | ERB21B5C2E2R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E2R0CDX1D | ERB21B5C2E2R0CDX1L | | |
| 2.2pF(2R2) | ±0.1pF(B) | ERB1885C2E2R2BDX1D | ERB21B5C2E2R2BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E2R2CDX1D | ERB21B5C2E2R2CDX1L | | |
| 2.4pF(2R4) | ±0.1pF(B) | ERB1885C2E2R4BDX1D | ERB21B5C2E2R4BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E2R4CDX1D | ERB21B5C2E2R4CDX1L | | |
| 2.7pF(2R7) | ±0.1pF(B) | ERB1885C2E2R7BDX1D | ERB21B5C2E2R7BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E2R7CDX1D | ERB21B5C2E2R7CDX1L | | |
| 3.0pF(3R0) | ±0.1pF(B) | ERB1885C2E3R0BDX1D | ERB21B5C2E3R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E3R0CDX1D | ERB21B5C2E3R0CDX1L | | |
| 3.3pF(3R3) | ±0.1pF(B) | ERB1885C2E3R3BDX1D | ERB21B5C2E3R3BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E3R3CDX1D | ERB21B5C2E3R3CDX1L | | |
| 3.6pF(3R6) | ±0.1pF(B) | ERB1885C2E3R6BDX1D | ERB21B5C2E3R6BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E3R6CDX1D | ERB21B5C2E3R6CDX1L | | |
| 3.9pF(3R9) | ±0.1pF(B) | ERB1885C2E3R9BDX1D | ERB21B5C2E3R9BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E3R9CDX1D | ERB21B5C2E3R9CDX1L | | |
| 4.0pF(4R0) | ±0.1pF(B) | ERB1885C2E4R0BDX1D | ERB21B5C2E4R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E4R0CDX1D | ERB21B5C2E4R0CDX1L | | |
| 4.3pF(4R3) | ±0.1pF(B) | ERB1885C2E4R3BDX1D | ERB21B5C2E4R3BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E4R3CDX1D | ERB21B5C2E4R3CDX1L | | |
| 4.7pF(4R7) | ±0.1pF(B) | ERB1885C2E4R7BDX1D | ERB21B5C2E4R7BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E4R7CDX1D | ERB21B5C2E4R7CDX1L | | |
| 5.0pF(5R0) | ±0.1pF(B) | ERB1885C2E5R0BDX1D | ERB21B5C2E5R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E5R0CDX1D | ERB21B5C2E5R0CDX1L | | |
| 5.1pF(5R1) | ±0.1pF(B) | ERB1885C2E5R1BDX1D | ERB21B5C2E5R1BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E5R1CDX1D | ERB21B5C2E5R1CDX1L | | |
| | ±0.5pF(D) | ERB1885C2E5R1DDX1D | ERB21B5C2E5R1DDX1L | | |
| 5.6pF(5R6) | ±0.1pF(B) | ERB1885C2E5R6BDX1D | ERB21B5C2E5R6BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E5R6CDX1D | ERB21B5C2E5R6CDX1L | | |
| | ±0.5pF(D) | ERB1885C2E5R6DDX1D | ERB21B5C2E5R6DDX1L | | |
| 6.0pF(6R0) | ±0.1pF(B) | ERB1885C2E6R0BDX1D | ERB21B5C2E6R0BDX1L | | |
| | ±0.25pF(C) | ERB1885C2E6R0CDX1D | ERB21B5C2E6R0CDX1L | | |
| | ±0.5pF(D) | ERB1885C2E6R0DDX1D | ERB21B5C2E6R0DDX1L | | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) ER B 18 8 5C 2E R50 B DX1 D

① Product ID
② Series
③ Dimension (LxW)
④ Dimension (T)
⑤ Temperature Characteristics
⑥ Rated Voltage
⑦ Capacitance
⑧ Capacitance Tolerance
⑨ Individual Specification Code
⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | 2.0x1.25(21)<0805> |
|-------------------|------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | 250(2E) |
| Capacitance | Tolerance | Part Number | |
| 6.2pF(6R2) | ±0.1pF(B) | ERB1885C2E6R2BDX1D | ERB21B5C2E6R2BDX1L |
| | ±0.25pF(C) | ERB1885C2E6R2CDX1D | ERB21B5C2E6R2CDX1L |
| | ±0.5pF(D) | ERB1885C2E6R2DDX1D | ERB21B5C2E6R2DDX1L |
| 6.8pF(6R8) | ±0.1pF(B) | ERB1885C2E6R8BDX1D | ERB21B5C2E6R8BDX1L |
| | ±0.25pF(C) | ERB1885C2E6R8CDX1D | ERB21B5C2E6R8CDX1L |
| | ±0.5pF(D) | ERB1885C2E6R8DDX1D | ERB21B5C2E6R8DDX1L |
| 7.0pF(7R0) | ±0.1pF(B) | ERB1885C2E7R0BDX5D | ERB21B5C2E7R0BDX1L |
| | ±0.25pF(C) | ERB1885C2E7R0CDX5D | ERB21B5C2E7R0CDX1L |
| | ±0.5pF(D) | ERB1885C2E7R0DDX5D | ERB21B5C2E7R0DDX1L |
| 7.5pF(7R5) | ±0.1pF(B) | ERB1885C2E7R5BDX5D | ERB21B5C2E7R5BDX1L |
| | ±0.25pF(C) | ERB1885C2E7R5CDX5D | ERB21B5C2E7R5CDX1L |
| | ±0.5pF(D) | ERB1885C2E7R5DDX5D | ERB21B5C2E7R5DDX1L |
| 8.0pF(8R0) | ±0.1pF(B) | ERB1885C2E8R0BDX5D | ERB21B5C2E8R0BDX1L |
| | ±0.25pF(C) | ERB1885C2E8R0CDX5D | ERB21B5C2E8R0CDX1L |
| | ±0.5pF(D) | ERB1885C2E8R0DDX5D | ERB21B5C2E8R0DDX1L |
| 8.2pF(8R2) | ±0.1pF(B) | ERB1885C2E8R2BDX5D | ERB21B5C2E8R2BDX1L |
| | ±0.25pF(C) | ERB1885C2E8R2CDX5D | ERB21B5C2E8R2CDX1L |
| | ±0.5pF(D) | ERB1885C2E8R2DDX5D | ERB21B5C2E8R2DDX1L |
| 9.0pF(9R0) | ±0.1pF(B) | ERB1885C2E9R0BDX5D | ERB21B5C2E9R0BDX1L |
| | ±0.25pF(C) | ERB1885C2E9R0CDX5D | ERB21B5C2E9R0CDX1L |
| | ±0.5pF(D) | ERB1885C2E9R0DDX5D | ERB21B5C2E9R0DDX1L |
| 9.1pF(9R1) | ±0.1pF(B) | ERB1885C2E9R1BDX5D | ERB21B5C2E9R1BDX1L |
| | ±0.25pF(C) | ERB1885C2E9R1CDX5D | ERB21B5C2E9R1CDX1L |
| | ±0.5pF(D) | ERB1885C2E9R1DDX5D | ERB21B5C2E9R1DDX1L |
| 10pF(100) | ±2%(G) | ERB1885C2E100GDX5D | ERB21B5C2E100GDX1L |
| | ±5%(J) | ERB1885C2E100JDX5D | ERB21B5C2E100JDX1L |
| 11pF(110) | ±2%(G) | ERB1885C2E110GDX5D | ERB21B5C2E110GDX1L |
| | ±5%(J) | ERB1885C2E110JDX5D | ERB21B5C2E110JDX1L |
| 12pF(120) | ±2%(G) | ERB1885C2E120GDX5D | ERB21B5C2E120GDX1L |
| | ±5%(J) | ERB1885C2E120JDX5D | ERB21B5C2E120JDX1L |
| 13pF(130) | ±2%(G) | ERB1885C2E130GDX5D | ERB21B5C2E130GDX1L |
| | ±5%(J) | ERB1885C2E130JDX5D | ERB21B5C2E130JDX1L |
| 15pF(150) | ±2%(G) | ERB1885C2E150GDX5D | ERB21B5C2E150GDX1L |
| | ±5%(J) | ERB1885C2E150JDX5D | ERB21B5C2E150JDX1L |
| 16pF(160) | ±2%(G) | ERB1885C2E160GDX5D | ERB21B5C2E160GDX1L |
| | ±5%(J) | ERB1885C2E160JDX5D | ERB21B5C2E160JDX1L |
| 18pF(180) | ±2%(G) | ERB1885C2E180GDX5D | ERB21B5C2E180GDX1L |
| | ±5%(J) | ERB1885C2E180JDX5D | ERB21B5C2E180JDX1L |
| 20pF(200) | ±2%(G) | ERB1885C2E200GDX5D | ERB21B5C2E200GDX1L |
| | ±5%(J) | ERB1885C2E200JDX5D | ERB21B5C2E200JDX1L |
| 22pF(220) | ±2%(G) | ERB1885C2E220GDX5D | ERB21B5C2E220GDX1L |
| | ±5%(J) | ERB1885C2E220JDX5D | ERB21B5C2E220JDX1L |
| 24pF(240) | ±2%(G) | ERB1885C2E240GDX5D | ERB21B5C2E240GDX1L |
| | ±5%(J) | ERB1885C2E240JDX5D | ERB21B5C2E240JDX1L |
| 27pF(270) | ±2%(G) | ERB1885C2E270GDX5D | ERB21B5C2E270GDX1L |
| | ±5%(J) | ERB1885C2E270JDX5D | ERB21B5C2E270JDX1L |
| 30pF(300) | ±2%(G) | ERB1885C2E300GDX5D | ERB21B5C2E300GDX1L |
| | ±5%(J) | ERB1885C2E300JDX5D | ERB21B5C2E300JDX1L |
| 33pF(330) | ±2%(G) | ERB1885C2E330GDX5D | ERB21B5C2E330GDX1L |
| | ±5%(J) | ERB1885C2E330JDX5D | ERB21B5C2E330JDX1L |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

(Part Number) ER B 18 8 5C 2E 6R2 B DX1 D
 ① Product ID ② Series ③ Dimension (LxW) ④ Dimension (T)
 ⑤ Temperature Characteristics ⑥ Rated Voltage ⑦ Capacitance
 ⑧ Capacitance Tolerance ⑨ Individual Specification Code ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics

| LxW [mm] | | 1.6x0.8(18)<0603> | | 2.0x1.25(21)<0805> | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 250(2E) | | 250(2E) | 100(2A) |
| Capacitance | Tolerance | Part Number | | | |
| 36pF(360) | ±2%(G) | ERB1885C2E360GDX5D | ERB21B5C2E360GDX1L | | |
| | ±5%(J) | ERB1885C2E360JDX5D | ERB21B5C2E360JDX1L | | |
| 39pF(390) | ±2%(G) | ERB1885C2E390GDX5D | ERB21B5C2E390GDX1L | | |
| | ±5%(J) | ERB1885C2E390JDX5D | ERB21B5C2E390JDX1L | | |
| 43pF(430) | ±2%(G) | ERB1885C2E430GDX5D | ERB21B5C2E430GDX1L | | |
| | ±5%(J) | ERB1885C2E430JDX5D | ERB21B5C2E430JDX1L | | |
| 47pF(470) | ±2%(G) | ERB1885C2E470GDX5D | ERB21B5C2E470GDX1L | | |
| | ±5%(J) | ERB1885C2E470JDX5D | ERB21B5C2E470JDX1L | | |
| 51pF(510) | ±2%(G) | ERB1885C2E510GDX5D | ERB21B5C2E510GDX1L | | |
| | ±5%(J) | ERB1885C2E510JDX5D | ERB21B5C2E510JDX1L | | |
| 56pF(560) | ±2%(G) | ERB1885C2E560GDX5D | ERB21B5C2E560GDX1L | | |
| | ±5%(J) | ERB1885C2E560JDX5D | ERB21B5C2E560JDX1L | | |
| 62pF(620) | ±2%(G) | ERB1885C2E620GDX5D | ERB21B5C2E620GDX1L | | |
| | ±5%(J) | ERB1885C2E620JDX5D | ERB21B5C2E620JDX1L | | |
| 68pF(680) | ±2%(G) | ERB1885C2E680GDX5D | ERB21B5C2E680GDX1L | | |
| | ±5%(J) | ERB1885C2E680JDX5D | ERB21B5C2E680JDX1L | | |
| 75pF(750) | ±2%(G) | ERB1885C2E750GDX5D | ERB21B5C2E750GDX1L | | |
| | ±5%(J) | ERB1885C2E750JDX5D | ERB21B5C2E750JDX1L | | |
| 82pF(820) | ±2%(G) | ERB1885C2E820GDX5D | ERB21B5C2E820GDX1L | | |
| | ±5%(J) | ERB1885C2E820JDX5D | ERB21B5C2E820JDX1L | | |
| 91pF(910) | ±2%(G) | ERB1885C2E910GDX5D | ERB21B5C2E910GDX1L | | |
| | ±5%(J) | ERB1885C2E910JDX5D | ERB21B5C2E910JDX1L | | |
| 100pF(101) | ±2%(G) | ERB1885C2E101GDX5D | ERB21B5C2E101GDX1L | | |
| | ±5%(J) | ERB1885C2E101JDX5D | ERB21B5C2E101JDX1L | | |
| 110pF(111) | ±2%(G) | | | ERB21B5C2A111GDX1L | |
| | ±5%(J) | | | ERB21B5C2A111JDX1L | |
| 120pF(121) | ±2%(G) | | | ERB21B5C2A121GDX1L | |
| | ±5%(J) | | | ERB21B5C2A121JDX1L | |
| 130pF(131) | ±2%(G) | | | ERB21B5C2A131GDX1L | |
| | ±5%(J) | | | ERB21B5C2A131JDX1L | |
| 150pF(151) | ±2%(G) | | | | ERB21B5C1H151GDX1L |
| | ±5%(J) | | | | ERB21B5C1H151JDX1L |
| 160pF(161) | ±2%(G) | | | | ERB21B5C1H161GDX1L |
| | ±5%(J) | | | | ERB21B5C1H161JDX1L |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

Temperature Compensating Type C0G(5C) Characteristics

6

| LxW [mm] | | 3.2x2.5(32)<1210> | |
|-------------------|------------|--------------------|--|
| Rated Volt. [Vdc] | | 500(2H) | |
| Capacitance | Tolerance | Part Number | |
| 3.3pF(3R3) | ±0.1pF(B) | ERB32Q5C2H3R3BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H3R3CDX1L | |
| 3.6pF(3R6) | ±0.1pF(B) | ERB32Q5C2H3R6BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H3R6CDX1L | |
| 3.9pF(3R9) | ±0.1pF(B) | ERB32Q5C2H3R9BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H3R9CDX1L | |
| 4.0pF(4R0) | ±0.1pF(B) | ERB32Q5C2H4R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H4R0CDX1L | |
| 4.3pF(4R3) | ±0.1pF(B) | ERB32Q5C2H4R3BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H4R3CDX1L | |
| 4.7pF(4R7) | ±0.1pF(B) | ERB32Q5C2H4R7BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H4R7CDX1L | |
| 5.0pF(5R0) | ±0.1pF(B) | ERB32Q5C2H5R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H5R0CDX1L | |
| 5.1pF(5R1) | ±0.1pF(B) | ERB32Q5C2H5R1BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H5R1CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H5R1DDX1L | |
| 5.6pF(5R6) | ±0.1pF(B) | ERB32Q5C2H5R6BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H5R6CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H5R6DDX1L | |
| 6.0pF(6R0) | ±0.1pF(B) | ERB32Q5C2H6R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H6R0CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H6R0DDX1L | |
| 6.2pF(6R2) | ±0.1pF(B) | ERB32Q5C2H6R2BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H6R2CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H6R2DDX1L | |
| 6.8pF(6R8) | ±0.1pF(B) | ERB32Q5C2H6R8BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H6R8CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H6R8DDX1L | |
| 7.0pF(7R0) | ±0.1pF(B) | ERB32Q5C2H7R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H7R0CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H7R0DDX1L | |
| 7.5pF(7R5) | ±0.1pF(B) | ERB32Q5C2H7R5BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H7R5CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H7R5DDX1L | |
| 8.0pF(8R0) | ±0.1pF(B) | ERB32Q5C2H8R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H8R0CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H8R0DDX1L | |
| 8.2pF(8R2) | ±0.1pF(B) | ERB32Q5C2H8R2BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H8R2CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H8R2DDX1L | |
| 9.0pF(9R0) | ±0.1pF(B) | ERB32Q5C2H9R0BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H9R0CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H9R0DDX1L | |
| 9.1pF(9R1) | ±0.1pF(B) | ERB32Q5C2H9R1BDX1L | |
| | ±0.25pF(C) | ERB32Q5C2H9R1CDX1L | |
| | ±0.5pF(D) | ERB32Q5C2H9R1DDX1L | |
| 10pF(100) | ±2%(G) | ERB32Q5C2H100GDX1L | |
| | ±5%(J) | ERB32Q5C2H100JDX1L | |

| LxW [mm] | | 3.2x2.5(32)<1210> | |
|-------------------|-----------|--------------------|--|
| Rated Volt. [Vdc] | | 500(2H) | |
| Capacitance | Tolerance | Part Number | |
| 11pF(110) | ±2%(G) | ERB32Q5C2H110GDX1L | |
| | ±5%(J) | ERB32Q5C2H110JDX1L | |
| 12pF(120) | ±2%(G) | ERB32Q5C2H120GDX1L | |
| | ±5%(J) | ERB32Q5C2H120JDX1L | |
| 13pF(130) | ±2%(G) | ERB32Q5C2H130GDX1L | |
| | ±5%(J) | ERB32Q5C2H130JDX1L | |
| 15pF(150) | ±2%(G) | ERB32Q5C2H150GDX1L | |
| | ±5%(J) | ERB32Q5C2H150JDX1L | |
| 16pF(160) | ±2%(G) | ERB32Q5C2H160GDX1L | |
| | ±5%(J) | ERB32Q5C2H160JDX1L | |
| 18pF(180) | ±2%(G) | ERB32Q5C2H180GDX1L | |
| | ±5%(J) | ERB32Q5C2H180JDX1L | |
| 20pF(200) | ±2%(G) | ERB32Q5C2H200GDX1L | |
| | ±5%(J) | ERB32Q5C2H200JDX1L | |
| 22pF(220) | ±2%(G) | ERB32Q5C2H220GDX1L | |
| | ±5%(J) | ERB32Q5C2H220JDX1L | |
| 24pF(240) | ±2%(G) | ERB32Q5C2H240GDX1L | |
| | ±5%(J) | ERB32Q5C2H240JDX1L | |
| 27pF(270) | ±2%(G) | ERB32Q5C2H270GDX1L | |
| | ±5%(J) | ERB32Q5C2H270JDX1L | |
| 30pF(300) | ±2%(G) | ERB32Q5C2H300GDX1L | |
| | ±5%(J) | ERB32Q5C2H300JDX1L | |
| 33pF(330) | ±2%(G) | ERB32Q5C2H330GDX1L | |
| | ±5%(J) | ERB32Q5C2H330JDX1L | |
| 36pF(360) | ±2%(G) | ERB32Q5C2H360GDX1L | |
| | ±5%(J) | ERB32Q5C2H360JDX1L | |
| 39pF(390) | ±2%(G) | ERB32Q5C2H390GDX1L | |
| | ±5%(J) | ERB32Q5C2H390JDX1L | |
| 43pF(430) | ±2%(G) | ERB32Q5C2H430GDX1L | |
| | ±5%(J) | ERB32Q5C2H430JDX1L | |
| 47pF(470) | ±2%(G) | ERB32Q5C2H470GDX1L | |
| | ±5%(J) | ERB32Q5C2H470JDX1L | |
| 51pF(510) | ±2%(G) | ERB32Q5C2H510GDX1L | |
| | ±5%(J) | ERB32Q5C2H510JDX1L | |
| 56pF(560) | ±2%(G) | ERB32Q5C2H560GDX1L | |
| | ±5%(J) | ERB32Q5C2H560JDX1L | |
| 62pF(620) | ±2%(G) | ERB32Q5C2H620GDX1L | |
| | ±5%(J) | ERB32Q5C2H620JDX1L | |
| 68pF(680) | ±2%(G) | ERB32Q5C2H680GDX1L | |
| | ±5%(J) | ERB32Q5C2H680JDX1L | |
| 75pF(750) | ±2%(G) | ERB32Q5C2H750GDX1L | |
| | ±5%(J) | ERB32Q5C2H750JDX1L | |
| 82pF(820) | ±2%(G) | ERB32Q5C2H820GDX1L | |
| | ±5%(J) | ERB32Q5C2H820JDX1L | |
| 91pF(910) | ±2%(G) | ERB32Q5C2H910GDX1L | |
| | ±5%(J) | ERB32Q5C2H910JDX1L | |
| 100pF(101) | ±2%(G) | ERB32Q5C2H101GDX1L | |
| | ±5%(J) | ERB32Q5C2H101JDX1L | |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

(Part Number) ER B 32 Q 5C 2H 3R3 B DX1 L
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Product ID ② Series ③ Dimension (LxW) ④ Dimension (T)
 ⑤ Temperature Characteristics ⑥ Rated Voltage ⑦ Capacitance
 ⑧ Capacitance Tolerance ⑨ Individual Specification Code ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

Temperature Compensating Type C0G(5C) Characteristics


| LxW [mm] | | 3.2x2.5(32)<1210> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 500(2H) | 300(YD) | 250(2E) | 100(2A) |
| Capacitance | Tolerance | Part Number | | | |
| 110pF(111) | ±2%(G) | ERB32Q5C2H111GDX1L | | | |
| | ±5%(J) | ERB32Q5C2H111JDX1L | | | |
| 120pF(121) | ±2%(G) | ERB32Q5C2H121GDX1L | | | |
| | ±5%(J) | ERB32Q5C2H121JDX1L | | | |
| 130pF(131) | ±2%(G) | | ERB32Q5CYD131GDX1L | | |
| | ±5%(J) | | ERB32Q5CYD131JDX1L | | |
| 150pF(151) | ±2%(G) | | ERB32Q5CYD151GDX1L | | |
| | ±5%(J) | | ERB32Q5CYD151JDX1L | | |
| 160pF(161) | ±2%(G) | | | ERB32Q5C2E161GDX1L | |
| | ±5%(J) | | | ERB32Q5C2E161JDX1L | |
| 180pF(181) | ±2%(G) | | | ERB32Q5C2E181GDX1L | |
| | ±5%(J) | | | ERB32Q5C2E181JDX1L | |
| 200pF(201) | ±2%(G) | | | ERB32Q5C2E201GDX1L | |
| | ±5%(J) | | | ERB32Q5C2E201JDX1L | |
| 220pF(221) | ±2%(G) | | | ERB32Q5C2E221GDX1L | |
| | ±5%(J) | | | ERB32Q5C2E221JDX1L | |
| 240pF(241) | ±2%(G) | | | | ERB32Q5C2A241GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A241JDX1L |
| 270pF(271) | ±2%(G) | | | | ERB32Q5C2A271GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A271JDX1L |
| 300pF(301) | ±2%(G) | | | | ERB32Q5C2A301GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A301JDX1L |
| 330pF(331) | ±2%(G) | | | | ERB32Q5C2A331GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A331JDX1L |
| 360pF(361) | ±2%(G) | | | | ERB32Q5C2A361GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A361JDX1L |
| 390pF(391) | ±2%(G) | | | | ERB32Q5C2A391GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A391JDX1L |
| 430pF(431) | ±2%(G) | | | | ERB32Q5C2A431GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A431JDX1L |
| 470pF(471) | ±2%(G) | | | | ERB32Q5C2A471GDX1L |
| | ±5%(J) | | | | ERB32Q5C2A471JDX1L |


| LxW [mm] | | 3.2x2.5(32)<1210> | |
|-------------------|-----------|--------------------|--|
| Rated Volt. [Vdc] | | 50(1H) | |
| Capacitance | Tolerance | Part Number | |
| 510pF(511) | ±2%(G) | ERB32Q5C1H511GDX1L | |
| | ±5%(J) | ERB32Q5C1H511JDX1L | |
| 560pF(561) | ±2%(G) | ERB32Q5C1H561GDX1L | |
| | ±5%(J) | ERB32Q5C1H561JDX1L | |
| 620pF(621) | ±2%(G) | ERB32Q5C1H621GDX1L | |
| | ±5%(J) | ERB32Q5C1H621JDX1L | |
| 680pF(681) | ±2%(G) | ERB32Q5C1H681GDX1L | |
| | ±5%(J) | ERB32Q5C1H681JDX1L | |
| 750pF(751) | ±2%(G) | ERB32Q5C1H751GDX1L | |
| | ±5%(J) | ERB32Q5C1H751JDX1L | |
| 820pF(821) | ±2%(G) | ERB32Q5C1H821GDX1L | |
| | ±5%(J) | ERB32Q5C1H821JDX1L | |
| 910pF(911) | ±2%(G) | ERB32Q5C1H911GDX1L | |
| | ±5%(J) | ERB32Q5C1H911JDX1L | |
| 1000pF(102) | ±2%(G) | ERB32Q5C1H102GDX1L | |
| | ±5%(J) | ERB32Q5C1H102JDX1L | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

ERB Series Specifications and Test Methods



6
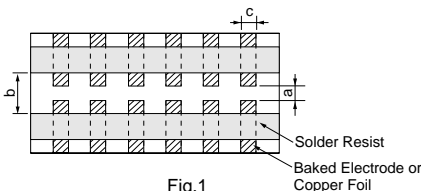
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | |
|---|---|--|--|-----------|----------|---------|-----------|--------------|-----|-----|-----|--------------|-----|-----|------|--------------|-----|-----|-----|
| 1 | Operating Temperature Range | -55 to +125°C | Reference Temperature: 25°C | | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V^{P-P} or V^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 300%(*) of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. (*) 300V: 250%, 500V: 200% | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance (I.R.) | 1,000,000MΩ min. (C≤470pF) 100,000MΩ min. (C>470pF) | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at 25°C and standard humidity and within 2 minutes of charging. | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/Q should be measured at 25°C at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | | |
| 8 | Q | $C \leq 220\text{pF} : Q \geq 10,000$ $220\text{pF} < C \leq 470\text{pF} : Q \geq 5,000$ $470\text{pF} < C \leq 1,000\text{pF} : Q \geq 3,000$ C: Nominal Capacitance (pF) | <table border="1"> <tr> <td>Frequency</td> <td>1±0.1MHz</td> </tr> <tr> <td>Voltage</td> <td>1±0.2Vrms</td> </tr> </table> | Frequency | 1±0.1MHz | Voltage | 1±0.2Vrms | | | | | | | | | | | | |
| Frequency | 1±0.1MHz | | | | | | | | | | | | | | | | | | |
| Voltage | 1±0.2Vrms | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | Capacitance Change | The temperature coefficient is determined using the capacitance measured in step 3 as a reference. When cycling the temperature sequentially from step 1 through 5, the capacitance should be within the specified tolerance for the temperature coefficient and capacitance change as Table A. The capacitance drift is calculated by dividing the differences between the maximum and minimum measured values in steps 1, 3 and 5 by the capacitance value in step 3. | | | | | | | | | | | | | | | | |
| | | Temperature Coefficient | | | | | | | | | | | | | | | | | |
| | | Capacitance Drift | | | | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defects should occur. | <p>Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 1 using an eutectic solder. Then apply 10N* force in parallel with the test jig for 10±1sec. The soldering should be done either with an iron or using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <table border="1"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>ERB18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>ERB21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>ERB32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> </tbody> </table> <p>(in mm) *5N (ERB188)</p> | Type | a | b | c | ERB18 | 1.0 | 3.0 | 1.2 | ERB21 | 1.2 | 4.0 | 1.65 | ERB32 | 2.2 | 5.0 | 2.9 |
| | | Type | | a | b | c | | | | | | | | | | | | | |
| ERB18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | |
| ERB21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | |
| ERB32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | |

Continued on the following page. 

ERB Series Specifications and Test Methods

Continued from the preceding page.
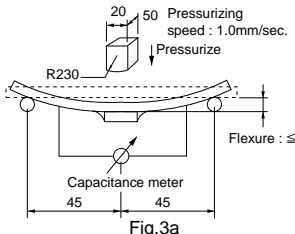
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | |
|---------------------|---|--|--|----------------|------------|------------------|--------------------|---|----------------------------|---|----------------------------|--------------|--|------------|--|-----------------|-------------------------|-----------|---|
| 11 | Appearance | No defects or abnormalities | Solder the capacitor to the test jig (glass epoxy board) in the same manner and under the same conditions as (10). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 minute. This motion should be applied for a period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours). | | | | | | | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | | | |
| 12 | Q | Satisfies the initial value. $C \leq 220\text{pF} : Q \geq 10,000$ $220\text{pF} < C \leq 470\text{pF} : Q \geq 5,000$ $470\text{pF} < C \leq 1,000\text{pF} : Q \geq 3,000$ C: Nominal Capacitance (pF) | Solder the capacitor on the test jig (glass epoxy board) shown in Fig. 2a using an eutectic solder. Then apply a force in the direction shown in Fig. 3a. The soldering should be done by the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | |
| | Appearance | No marking defects | | | | | | | | | | | | | | | | | |
| 13 | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>ERB18</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>ERB21</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>ERB32</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> </tbody> </table> <p style="text-align: right;">(in mm)</p> | Type | a | b | c | ERB18 | 1.0 | 3.0 | 1.2 | ERB21 | 1.2 | 4.0 | 1.65 | ERB32 | 2.2 | 5.0 | 2.9 |
| | Type | a | | b | c | | | | | | | | | | | | | | |
| ERB18 | 1.0 | 3.0 | 1.2 | | | | | | | | | | | | | | | | |
| ERB21 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | |
| ERB32 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | |
| 14 | Deflection |  Fig. 3a |  Fig. 2a | | | | | | | | | | | | | | | | |
| | Solderability of Termination | 95% of the terminations are to be soldered evenly and continuously. | | | | | | | | | | | | | | | | | |
| 15 | Resistance to Soldering Heat | The measured and observed characteristics should satisfy the specifications in the following table. | Immerse the capacitor in a solution of isopropyl alcohol and rosin (25% rosin in weight proportion). Preheat at 80 to 120°C for 10 to 30 seconds. After preheating, immerse in an eutectic solder or Sn-3.0Ag-0.5Cu solder solution for 5±0.5 seconds at 245±5°C. Preheat according to the conditions listed in the table below. Immerse the capacitor in an eutectic solder or Sn-3.0Ag-0.5Cu solder solution at 270±5°C for 10±0.5 seconds. Let sit at room temperature for 24±2 hours. | | | | | | | | | | | | | | | | |
| | Temperature Cycle | The measured and observed characteristics should satisfy the specifications in the following table. | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Appearance</td> <td>No marked defect</td> </tr> <tr> <td>Capacitance Change</td> <td>Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger)</td> </tr> <tr> <td>Q</td> <td> $C \leq 220\text{pF} : Q \geq 10,000$ $220\text{pF} < C \leq 470\text{pF} : Q \geq 5,000$ $470\text{pF} < C \leq 1,000\text{pF} : Q \geq 3,000$ </td> </tr> <tr> <td>Dielectric Strength</td> <td>No failure</td> </tr> </tbody> </table> <p style="text-align: center;">C: Nominal Capacitance (pF)</p> | Item | Specifications | Appearance | No marked defect | Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger) | Q | $C \leq 220\text{pF} : Q \geq 10,000$ $220\text{pF} < C \leq 470\text{pF} : Q \geq 5,000$ $470\text{pF} < C \leq 1,000\text{pF} : Q \geq 3,000$ | Dielectric Strength | No failure | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Chip Size</th> <th>Preheat Condition</th> </tr> </thead> <tbody> <tr> <td>2.0×1.25mm max.</td> <td>1minute at 120 to 150°C</td> </tr> <tr> <td>3.2×2.5mm</td> <td>Each 1 minute at 100 to 120°C and then 170 to 200°C</td> </tr> </tbody> </table> | Chip Size | Preheat Condition | 2.0×1.25mm max. | 1minute at 120 to 150°C | 3.2×2.5mm | Each 1 minute at 100 to 120°C and then 170 to 200°C |
| Item | Specifications | | | | | | | | | | | | | | | | | | |
| Appearance | No marked defect | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | | | | |
| Q | $C \leq 220\text{pF} : Q \geq 10,000$ $220\text{pF} < C \leq 470\text{pF} : Q \geq 5,000$ $470\text{pF} < C \leq 1,000\text{pF} : Q \geq 3,000$ | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | |
| Chip Size | Preheat Condition | | | | | | | | | | | | | | | | | | |
| 2.0×1.25mm max. | 1minute at 120 to 150°C | | | | | | | | | | | | | | | | | | |
| 3.2×2.5mm | Each 1 minute at 100 to 120°C and then 170 to 200°C | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Appearance</td> <td>No marked defect</td> </tr> <tr> <td>Capacitance Change</td> <td>Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger)</td> </tr> <tr> <td>Q</td> <td> $C \geq 30\text{pF} : Q \geq 350$ $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{10}$ $C < 10\text{pF} : Q \geq 200 + 10C$ </td> </tr> <tr> <td>I.R.</td> <td>1,000MΩ min.</td> </tr> <tr> <td>Dielectric Strength</td> <td>No failure</td> </tr> </tbody> </table> <p style="text-align: center;">C: Nominal Capacitance (pF)</p> | Item | Specifications | Appearance | No marked defect | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | Q | $C \geq 30\text{pF} : Q \geq 350$ $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{10}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | I.R. | 1,000MΩ min. | Dielectric Strength | No failure | Fix the capacitor to the supporting jig in the same manner and under the same conditions as (10). Perform the five cycles according to the four heat treatments listed in the following table. Let sit for 24±2 hours at room temperature, then measure. | | | | |
| Item | Specifications | | | | | | | | | | | | | | | | | | |
| Appearance | No marked defect | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) | | | | | | | | | | | | | | | | | | |
| Q | $C \geq 30\text{pF} : Q \geq 350$ $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{10}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | | | | | | | | | | | | | | | | | | |
| I.R. | 1,000MΩ min. | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | No failure | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. +0/-3</td> <td>Room Temp.</td> <td>Max. Operating Temp. +3/-0</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>5 max.</td> <td>30±3</td> <td>5 max.</td> </tr> </tbody> </table> | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | Time (min.) | 30±3 | 5 max. | 30±3 | 5 max. | | |
| Step | 1 | 2 | 3 | 4 | | | | | | | | | | | | | | | |
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | | | | | | | | | | | | | | | |
| Time (min.) | 30±3 | 5 max. | 30±3 | 5 max. | | | | | | | | | | | | | | | |

Continued on the following page.

ERB Series Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method | | | | | | | | | | |
|--------------------|---|---|-------------|----------------|------------|------------------|--------------------|---|---|---|------|----------------------|--|
| 16 | Humidity | <p>The measured and observed characteristics should satisfy the specifications in the following table.</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Appearance</td> <td>No marked defect</td> </tr> <tr> <td>Capacitance Change</td> <td>Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$</td> </tr> <tr> <td>Q</td> <td>$10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$</td> </tr> <tr> <td>I.R.</td> <td>1,000MΩ min.</td> </tr> </tbody> </table> <p style="text-align: right;">C: Nominal Capacitance (pF)</p> | Item | Specifications | Appearance | No marked defect | Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$ | Q | $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | I.R. | 1,000M Ω min. | <p>Apply the 24-hour heat (-10 to $+65^\circ\text{C}$) and humidity (80 to 100%) treatment shown below, 10 consecutive times. Remove, let sit for 24 ± 2 hours at room temperature, and measure.</p> |
| Item | Specifications | | | | | | | | | | | | |
| Appearance | No marked defect | | | | | | | | | | | | |
| Capacitance Change | Within $\pm 5\%$ or $\pm 0.5\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$ | | | | | | | | | | | | |
| Q | $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | | | | | | | | | | | | |
| I.R. | 1,000M Ω min. | | | | | | | | | | | | |
| 17 | High Temperature Load | <p>The measured and observed characteristics should satisfy the specifications in the following table.</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Appearance</td> <td>No marked defect</td> </tr> <tr> <td>Capacitance Change</td> <td>Within $\pm 3\%$ or $\pm 0.3\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$</td> </tr> <tr> <td>Q</td> <td>$10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$</td> </tr> <tr> <td>I.R.</td> <td>1,000MΩ min.</td> </tr> </tbody> </table> <p style="text-align: right;">C: Nominal Capacitance (pF)</p> | Item | Specifications | Appearance | No marked defect | Capacitance Change | Within $\pm 3\%$ or $\pm 0.3\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$ | Q | $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | I.R. | 1,000M Ω min. | <p>Apply 200% (500V only 150%) of the rated voltage for $1,000 \pm 12$ hours at $125 \pm 3^\circ\text{C}$. Remove and let sit for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.</p> |
| Item | Specifications | | | | | | | | | | | | |
| Appearance | No marked defect | | | | | | | | | | | | |
| Capacitance Change | Within $\pm 3\%$ or $\pm 0.3\text{pF}$ (Whichever is larger) $C \geq 30\text{pF} : Q \geq 350$ | | | | | | | | | | | | |
| Q | $10\text{pF} \leq C < 30\text{pF} : Q \geq 275 + \frac{C}{2}$ $C < 10\text{pF} : Q \geq 200 + 10C$ | | | | | | | | | | | | |
| I.R. | 1,000M Ω min. | | | | | | | | | | | | |


Table A-6

| Char. | Nominal Values (ppm/ $^\circ\text{C}$) Note 1 | Capacitance Change from 25°C (%) | | | | | |
|-------|--|--|-------|-------|-------|-------|-------|
| | | -55 | | -30 | | -10 | |
| | | Max. | Min. | Max. | Min. | Max. | Min. |
| 5C | 0 ± 30 | 0.58 | -0.24 | 0.40 | -0.17 | 0.25 | -0.11 |


Note 1: Nominal values denote the temperature coefficient within a range of 25 to 125°C (for 5C)

ERB Series Data

■ Q - Frequency Characteristics

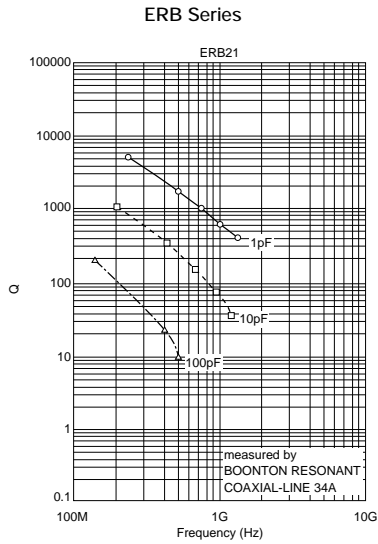


■ Impedance - Frequency Characteristics

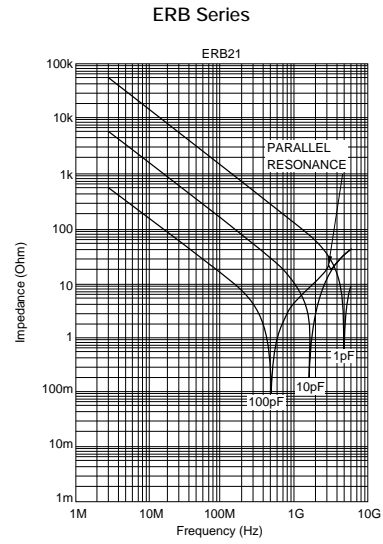


6


■ ESR - Frequency Characteristics

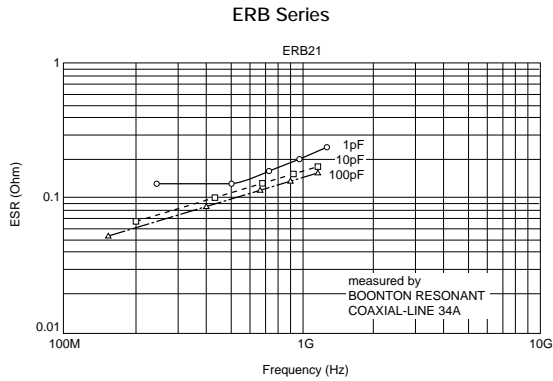


■ Self Resonant Frequency - Capacitance

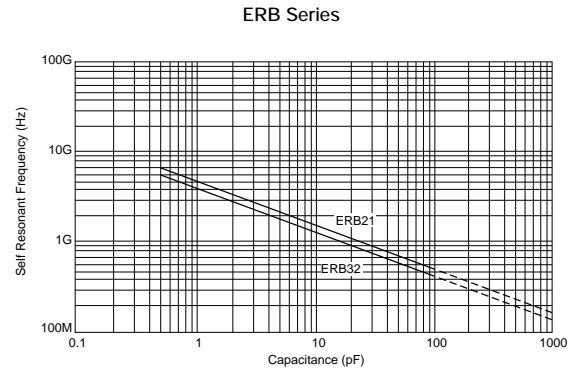

■ Allowable Voltage - Frequency

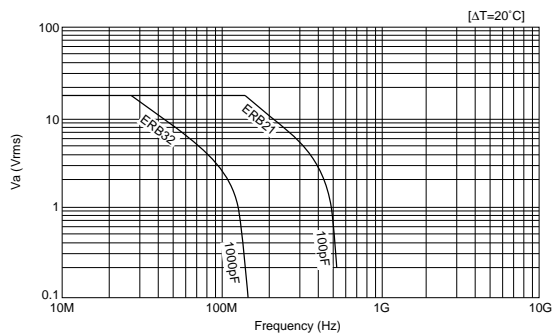

■ Allowable Current - Frequency

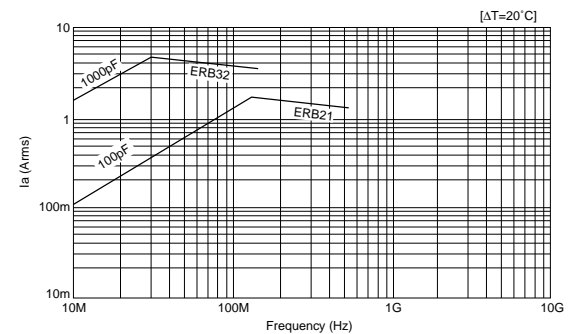


Continued on the following page. ↗


ERB Series Data

Continued from the preceding page.

■ Allowable Apparent Power - Frequency

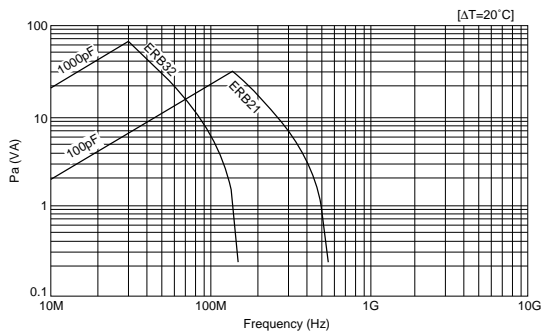

■ Allowable Effective Power - Frequency

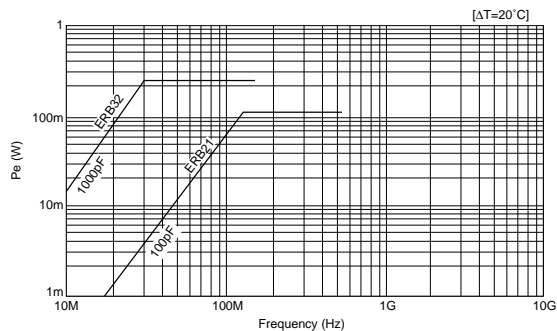

6

Chip Monolithic Ceramic Capacitors




Monolithic Microchip GMA Series

■ Features

1. Better micro wave characteristics
2. Suitable for by-passing
3. High density mounting

■ Applications

1. Optical device for telecommunication
2. IC, IC packaging built-in
3. Measuring equipment

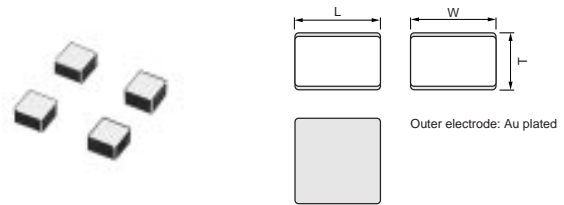

| Part Number | Dimensions (mm) | | |
|---------------|-----------------|------------|------------|
| | L | W | T |
| GMA0D3 | 0.38 ±0.05 | 0.38 ±0.05 | 0.3 ±0.05 |
| GMA05X | 0.5 ±0.05 | 0.5 ±0.05 | 0.35 ±0.05 |
| GMA085 | 0.8 ±0.05 | 0.8 ±0.05 | 0.5 ±0.1 |

Capacitance Table

7

High Dielectric Constant Type X7R(R7)/X5R(R6) Characteristics

| X | ex.X: T Dimension [mm] | | | | | | | | | |
|---------------------|------------------------|-------------------------------|---------------------------|------------|-------------|-------------|---------------------------|-------------|-------------|--|
| | LxW [mm] | 0.38x0.38 (0D) <015015> | 0.5x0.5 (05) <0202> | | | | 0.8x0.8 (08) <0303> | | | |
| Rated Voltage [Vdc] | 10 (1A) | 100 (2A) | 25 (1E) | 10 (1A) | 6.3 (0J) | 100 (2A) | 25 (1E) | 10 (1A) | 6.3 (0J) | |
| Capacitance | TC | X7R (R7) | X7R (R7) | | X5R (R6) | X7R (R7) | | X5R (R6) | | |
| 100pF(101) | | X | | | | | | | | |
| 150pF(151) | | X | | | | | | | | |
| 220pF(221) | | X | | | | | | | | |
| 330pF(331) | | X | | | | | | | | |
| 470pF(471) | | X | | | | | | | | |
| 680pF(681) | | X | | | | | | | | |
| 1000pF(102) | | X | | | | | | | | |
| 1500pF(152) | | | X | | | 5 | | | | |
| 2200pF(222) | | | X | | | 5 | | | | |
| 3300pF(332) | | | X | | | 5 | | | | |
| 4700pF(472) | | | X | | | 5 | | | | |
| 6800pF(682) | | | | X | | 5 | | | | |
| 10000pF(103) | 3 | | | X | | | 5 | | | |
| 15000pF(153) | | | | X | | | 5 | | | |
| 22000pF(223) | | | | X | | | 5 | | | |
| 33000pF(333) | | | | | | | | 5 | | |
| 47000pF(473) | | | | | | | | 5 | | |
| 68000pF(683) | | | | | | | | 5 | | |
| 0.10μF(104) | | | | | X | | | 5 | | |
| 0.47μF(474) | | | | | | | | | 5 | |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7)/X5R(R6) Characteristics

| | | |
|-------------------|-----------------------|--------------------|
| LxW [mm] | 0.38x0.38(0D)<015015> | |
| Rated Volt. [Vdc] | 10(1A) | |
| Capacitance | Tolerance | Part Number |
| 1000pF(103) | ±20%(M) | GMA0D3R71A103MA01T |

| LxW [mm] | | 0.5x0.5(05)<0202> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 25(1E) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 100pF(101) | ±20%(M) | GMA05XR72A101MA01T | | | |
| 150pF(151) | ±20%(M) | GMA05XR72A151MA01T | | | |
| 220pF(221) | ±20%(M) | GMA05XR72A221MA01T | | | |
| 330pF(331) | ±20%(M) | GMA05XR72A331MA01T | | | |
| 470pF(471) | ±20%(M) | GMA05XR72A471MA01T | | | |
| 680pF(681) | ±20%(M) | GMA05XR72A681MA01T | | | |
| 1000pF(102) | ±20%(M) | GMA05XR72A102MA01T | | | |
| 1500pF(152) | ±20%(M) | | GMA05XR71E152MA11T | | |
| 2200pF(222) | ±20%(M) | | GMA05XR71E222MA11T | | |
| 3300pF(332) | ±20%(M) | | GMA05XR71E332MA11T | | |
| 4700pF(472) | ±20%(M) | | GMA05XR71E472MA11T | | |
| 6800pF(682) | ±20%(M) | | | GMA05XR71A682MA01T | |
| 10000pF(103) | ±20%(M) | | | GMA05XR71A103MA01T | |
| 15000pF(153) | ±20%(M) | | | GMA05XR71A153MA01T | |
| 22000pF(223) | ±20%(M) | | | GMA05XR71A223MA01T | |
| 33000pF(333) | ±20%(M) | | | | |
| 47000pF(473) | ±20%(M) | | | | |
| 68000pF(683) | ±20%(M) | | | | |
| 0.10μF(104) | ±20%(M) | | | | GMA05XR60J104ME12T* |

| LxW [mm] | | 0.8x0.8(08)<0303> | | | |
|-------------------|-----------|--------------------|--------------------|--------------------|---------------------|
| Rated Volt. [Vdc] | | 100(2A) | 25(1E) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | | |
| 1500pF(152) | ±20%(M) | GMA085R72A152MA01T | | | |
| 2200pF(222) | ±20%(M) | GMA085R72A222MA01T | | | |
| 3300pF(332) | ±20%(M) | GMA085R72A332MA01T | | | |
| 4700pF(472) | ±20%(M) | GMA085R72A472MA01T | | | |
| 6800pF(682) | ±20%(M) | GMA085R72A682MA01T | | | |
| 10000pF(103) | ±20%(M) | | GMA085R71E103MA11T | | |
| 15000pF(153) | ±20%(M) | | GMA085R71E153MA11T | | |
| 22000pF(223) | ±20%(M) | | GMA085R71E223MA11T | | |
| 33000pF(333) | ±20%(M) | | | GMA085R71A333MA01T | |
| 47000pF(473) | ±20%(M) | | | GMA085R71A473MA01T | |
| 68000pF(683) | ±20%(M) | | | GMA085R71A683MA01T | |
| 0.10μF(104) | ±20%(M) | | | GMA085R71A104MA01T | |
| 0.47μF(474) | ±20%(M) | | | | GMA085R60J474ME12T* |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

*: Please refer to GMA series Specifications and Test Method(2).

(Part Number) **GM** **A** **0D** **3** **R7** **1A** **103** **M** **A01** **T**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Product ID
- ② Series
- ③ Dimension (LxW)
- ④ Dimension (T)
- ⑤ Temperature Characteristics
- ⑥ Rated Voltage
- ⑦ Capacitance
- ⑧ Capacitance Tolerance
- ⑨ Individual Specification Code
- ⑩ Packaging

Packaging Code in Part Number is a code shows STD Tray.

GMA Series Specifications and Test Methods(1)

In case Non "" is added in PNs table, please refer to GMA Series Specifications and Test Methods (1).
 In case "" is added in PNs table, please refer to GMA Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|--|---|---|--|------------|------------------|---------|-----------|---|------------|----------------------------|------------|----------------------------|------------|-------------|------|--------|------|--------|
| 1 | Operating Temperature Range | R7: -55 to +125°C | Reference Temperature: 25°C | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities | No failure should be observed when a voltage of 250% of the rated voltage is applied between the both terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | More than 10,000MΩ or 500ΩF (Whichever is smaller) | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at normal temperature and humidity and within 2 minutes of charging. | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at reference temperature at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | R7: W.V.: 25V min.; 0.025 max. W.V.: 16V/10V; 0.035 max. | <table border="1" style="width: 100%;"> <tr> <td>Frequency</td> <td>1±0.1kHz</td> </tr> <tr> <td>Voltage</td> <td>1±0.2Vrms</td> </tr> </table> | Frequency | 1±0.1kHz | Voltage | 1±0.2Vrms | | | | | | | | | | | |
| Frequency | 1±0.1kHz | | | | | | | | | | | | | | | | | |
| Voltage | 1±0.2Vrms | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias R7: Within +/-15% (-55 to +125°C) | The capacitance change should be measured after 5min. at each specified temp. stage. •The ranges of capacitance change compared with the Reference Temperature value over the temperature ranges shown in the table should be within the specified ranges.* <table border="1" style="width: 100%;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>125±3</td> </tr> </tbody> </table> *Initial measurement for high dielectric constant type Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement. | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 | 3 | 25±2 | 4 | 125±3 | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | | | | |
| 4 | 125±3 | | | | | | | | | | | | | | | | | |
| 10 | Mechanical Strength | Bond Strength | Pull force: 0.03N min. MIL-STD-883 Method 2011 Condition D Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20) and bond a 25μm (0.001 inch) gold wire to the capacitor terminal using an ultrasonic ball bond. Then, pull wire. | | | | | | | | | | | | | | | |
| | | Die Shear Strength | Die Shear force: 2N min. MIL-STD-883 Method 2019 Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20). Apply the force parallel to the substrate. | | | | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | |
| | | D.F. | R7: W.V.: 25V min.; 0.025 max. W.V.: 16V/10V; 0.035 max. Ramp frequency from 10 to 55Hz then return to 10Hz all within 1 minute. Amplitude: 1.5 mm (0.06 inch) max. total excursion. Apply this motion for a period of 2 hours in each of 3 mutually perpendicular directions (total 6 hours). | | | | | | | | | | | | | | | |
| 12 | Temperature Cycle | Appearance | No defects or abnormalities | | | | | | | | | | | | | | | |
| | | Capacitance Change | R7: Within ±7.5% The capacitor should be set for 24±2 hours at room temperature after one hour heat of treatment at 150+0/-10°C, then measure for the initial measurement. Fix the capacitor to the supporting jig in the same manner and under the same conditions as (11) and conduct the five cycles according to the temperatures and time shown in the following table. Set it for 24±2 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | D.F. | R7: W.V.: 25V min.; 0.025 max. W.V.: 16V/10V; 0.035 max. | | | | | | | | | | | | | | | |
| | | I.R. | More than 10,000MΩ or 500ΩF (Whichever is smaller) | | | | | | | | | | | | | | | |
| | | Dielectric Strength | No defects | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. +0/-3</td> <td>Room Temp.</td> <td>Max. Operating Temp. +3/-0</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30±3</td> <td>2 to 3</td> <td>30±3</td> <td>2 to 3</td> </tr> </tbody> </table> | | | | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 |
| Step | 1 | 2 | 3 | 4 | | | | | | | | | | | | | | |
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | | | | | | | | | | | | | | |
| Time (min.) | 30±3 | 2 to 3 | 30±3 | 2 to 3 | | | | | | | | | | | | | | |

Mounting for testing: The capacitors should be mounted on the substrate as shown below using die bonding and wire bonding when tests No.11 to 15 are performed.

Continued on the following page.

7


GMA Series Specifications and Test Methods(1)

Continued from the preceding page.

In case Non "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method |
|-----|-----------------------------|--------------------|--|
| 13 | Humidity (Steady State) | Appearance | No defects or abnormalities |
| | | Capacitance Change | R7: Within $\pm 12.5\%$ |
| | | D.F. | R7: W.V.: 10V min.; 0.05 max. |
| | | I.R. | More than 1,000M Ω or 50 Ω F (Whichever is smaller) |
| 14 | Humidity Load | Appearance | No defects or abnormalities |
| | | Capacitance Change | R7: Within $\pm 12.5\%$ |
| | | D.F. | R7: W.V.: 10V min.; 0.05 max. |
| | | I.R. | More than 500M Ω or 25 Ω F (Whichever is smaller) |
| 15 | High Temperature Load | Appearance | No defects or abnormalities |
| | | Capacitance Change | R7: Within $\pm 12.5\%$ |
| | | D.F. | R7: W.V.: 10V min.; 0.05 max. |
| | | I.R. | More than 1,000M Ω or 50 Ω F (Whichever is smaller) |
| | | | Set the capacitor for 500 ± 12 hours at 40 $\pm 2^\circ$ C, in 90 to 95% humidity. Take it out and set it for 24 ± 2 hours at room temperature, then measure. |
| | | | Apply the rated voltage for 500 ± 12 hours at 40 $\pm 2^\circ$ C, in 90 to 95% humidity and set it for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. |
| | | | A voltage treatment should be given to the capacitor, in which a DC voltage of 200% the rated voltage is applied for one hour at the maximum operating temperature $\pm 3^\circ$ C then it should be set for 24 ± 2 hours at room temperature and the initial measurement should be conducted. Then apply the above mentioned voltage continuously for 1000 ± 12 hours at the same temperature, remove it from the bath, and set it for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA. |

Mounting for testing: The capacitors should be mounted on the substrate as shown below using die bonding and wire bonding when tests No.11 to 15 are performed.

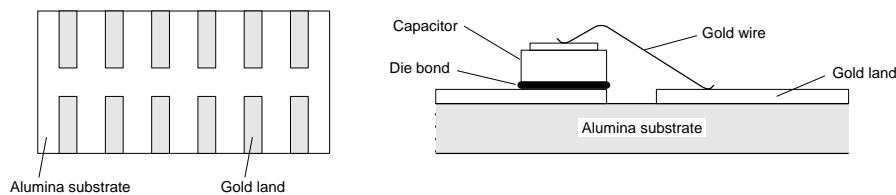

GMA Series Specifications and Test Methods(2)

In case Non "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|---------------------|---|---|---|-------------|------------------|---------|---------------------|------------|---------------|----------------------------|------------|----------------------------|------------|-------------|--------|--------|--------|--------|
| 1 | Operating Temperature Range | R6 : -55°C to 85°C | Reference Temperature : 25°C | | | | | | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities. | Visual inspection. | | | | | | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions. | Using calipers. | | | | | | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities. | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance | More than 50Ω · F | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at normal temperature and humidity and within 1 minutes of charging. | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance. | The capacitance/D.F. should be measured at reference temperature at the frequency and voltage shown in the table. | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | R6 : 0.1 max. | <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C ≤ 10μF (6.3Vmax.)</td> <td>1 ± 0.1kHz</td> <td>0.5 ± 0.1Vrms</td> </tr> </tbody> </table> | Capacitance | Frequency | Voltage | C ≤ 10μF (6.3Vmax.) | 1 ± 0.1kHz | 0.5 ± 0.1Vrms | | | | | | | | | |
| Capacitance | Frequency | Voltage | | | | | | | | | | | | | | | | |
| C ≤ 10μF (6.3Vmax.) | 1 ± 0.1kHz | 0.5 ± 0.1Vrms | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias R6 : Within ±15% (-55°C to +85°C) | <p>The capacitance change should be measured after 5min. at each specified temp. stage.</p> <p>The ranges of capacitance change compared with the Reference Temperature value over the temperature ranges shown in the table should be within the specified ranges.*</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25 ± 2</td> </tr> <tr> <td>2</td> <td>-55 ± 3</td> </tr> <tr> <td>3</td> <td>25 ± 2</td> </tr> <tr> <td>4</td> <td>85 ± 3</td> </tr> </tbody> </table> <p>*Initial measurement for high dielectric constant type Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24 ± 2 hours at room temperature. Perform the initial measurement.</p> | Step | Temperature (°C) | 1 | 25 ± 2 | 2 | -55 ± 3 | 3 | 25 ± 2 | 4 | 85 ± 3 | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | |
| 1 | 25 ± 2 | | | | | | | | | | | | | | | | | |
| 2 | -55 ± 3 | | | | | | | | | | | | | | | | | |
| 3 | 25 ± 2 | | | | | | | | | | | | | | | | | |
| 4 | 85 ± 3 | | | | | | | | | | | | | | | | | |
| 10 | Mechanical Strength | Bond Strength Pull force : 0.03N min. | MIL-STD-883 Method 2011 Condition D Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20) and bond a 25μm (0.001 inch) gold wire to the capacitor terminal using an ultrasonic ball bond. Then, pull wire. | | | | | | | | | | | | | | | |
| | | Die Shear Strength Die Shear force : 2N min. | MIL-STD-883 Method 2019 Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20). Apply the force parallel to the substrate. | | | | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance No defects or abnormalities. | Ramp frequency from 10 to 55Hz then return to 10Hz all within 1 minute. Amplitude : 1.5 mm (0.06 inch) max. total excursion. Apply this motion for a period of 2 hours in each of 3 mutually perpendicular directions (total 6 hours). | | | | | | | | | | | | | | | |
| | | Capacitance Within the specified tolerance. | | | | | | | | | | | | | | | | |
| | | D.F. R6 : 0.1 max. | | | | | | | | | | | | | | | | |
| 12 | Temperature Sudden Change | Appearance No defects or abnormalities. | The capacitor should be set for 24 ± 2 hours at room temperature after one hour heat of treatment at 150 +0/-10°C, then measure for the initial measurement. Fix the capacitor to the supporting jig in the same manner and under the same conditions as (11) and conduct the five cycles according to the temperatures and time shown in the following table. Set it for 48 ± 4 hours at room temperature, then measure. | | | | | | | | | | | | | | | |
| | | Capacitance Change R6 : Within ±7.5% | | | | | | | | | | | | | | | | |
| | | D.F. R6 : 0.1 max. | | | | | | | | | | | | | | | | |
| | | I.R. More than 50Ω · F | | | | | | | | | | | | | | | | |
| | | Dielectric Strength No defects | | | | | | | | | | | | | | | | |
| | | | <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> </tr> </thead> <tbody> <tr> <td>Temp. (°C)</td> <td>Min. Operating Temp. +0/-3</td> <td>Room Temp.</td> <td>Max. Operating Temp. +3/-0</td> <td>Room Temp.</td> </tr> <tr> <td>Time (min.)</td> <td>30 ± 3</td> <td>2 to 3</td> <td>30 ± 3</td> <td>2 to 3</td> </tr> </tbody> </table> | Step | 1 | 2 | 3 | 4 | Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | Time (min.) | 30 ± 3 | 2 to 3 | 30 ± 3 | 2 to 3 |
| Step | 1 | 2 | 3 | 4 | | | | | | | | | | | | | | |
| Temp. (°C) | Min. Operating Temp. +0/-3 | Room Temp. | Max. Operating Temp. +3/-0 | Room Temp. | | | | | | | | | | | | | | |
| Time (min.) | 30 ± 3 | 2 to 3 | 30 ± 3 | 2 to 3 | | | | | | | | | | | | | | |

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding and wire bonding when tests No.11 to 14 are performed.

Continued on the following page. ↗

7

GMA Series Specifications and Test Methods(2)



Continued from the preceding page.

In case Non "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GMA Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method |
|-----|--|--------------------|--------------------------------|
| 13 | High Temperature High Humidity (Steady) | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R6 : Within $\pm 12.5\%$ |
| | | D.F. | R6 : 0.2 max. |
| | | I.R. | More than $12.5\Omega \cdot F$ |
| 14 | Durability | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R6 : Within $\pm 12.5\%$ |
| | | D.F. | R6 : 0.2 max. |
| | | I.R. | More than $25\Omega \cdot F$ |

7

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding and wire bonding when tests No.11 to 14 are performed.

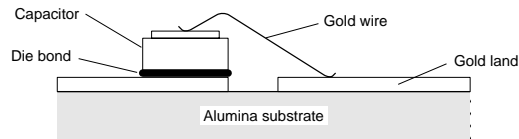


Chip Monolithic Ceramic Capacitors



for Bonding GMD Series

■ Features

1. Small chip size (LxWxT: 0.6x0.3x0.3, 1.0x0.5x0.5mm)
2. Available for Wire/Die bonding due to Gold termination.
3. Suitable for Optical device for telecommunication, IC packaging built-in.

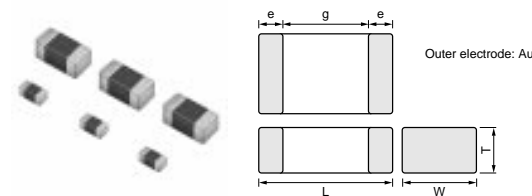

■ Applications

1. Optical device for telecommunication
2. IC, IC packaging built-in

| Part Number | Dimensions (mm) | | | | |
|---------------|-----------------|----------|----------|--------------|--------|
| | L | W | T | e | g min. |
| GMD033 | 0.6±0.03 | 0.3±0.03 | 0.3±0.03 | 0.12 to 0.22 | 0.16 |
| GMD155 | 1.0±0.05 | 0.5±0.05 | 0.5±0.05 | 0.15 to 0.35 | 0.3 |

Capacitance Table

High Dielectric Constant Type X7R(R7)/X5R(R6) Characteristics

| 3 | | ex.3: T Dimension [mm] | | | | | | | | |
|--------------|---------------------|------------------------|---------|---------|---------------------|---------|---------------------|---------------------|---------|----------|
| LxW [mm] | Rated Voltage [Vdc] | 0.6x0.3 (03) <0201> | | | 1.0x0.5 (15) <0402> | | 0.6x0.3 (03) <0201> | 1.0x0.5 (15) <0402> | | |
| | | 25 (1E) | 16 (1C) | 10 (1A) | 50 (1H) | 25 (1E) | 16 (1C) | 6.3 (0J) | 10 (1A) | 6.3 (0J) |
| Capacitance | TC | X7R (R7) | | | | | X5R (R6) | | | |
| 100pF(101) | 3 | | | | | | | | | |
| 120pF(121) | 3 | | | | | | | | | |
| 150pF(151) | 3 | | | | | | | | | |
| 180pF(181) | 3 | | | | | | | | | |
| 220pF(221) | 3 | | | | 5 | | | | | |
| 270pF(271) | 3 | | | | 5 | | | | | |
| 330pF(331) | 3 | | | | 5 | | | | | |
| 390pF(391) | 3 | | | | 5 | | | | | |
| 470pF(471) | 3 | | | | 5 | | | | | |
| 560pF(561) | 3 | | | | 5 | | | | | |
| 680pF(681) | 3 | | | | 5 | | | | | |
| 820pF(821) | 3 | | | | 5 | | | | | |
| 1000pF(102) | 3 | | | | 5 | | | | | |
| 1200pF(122) | 3 | | | | 5 | | | | | |
| 1500pF(152) | 3 | | | | 5 | | | | | |
| 1800pF(182) | | 3 | | | 5 | | | | | |
| 2200pF(222) | | 3 | | | 5 | | | | | |
| 2700pF(272) | | 3 | | | 5 | | | | | |
| 3300pF(332) | | 3 | | | 5 | | | | | |
| 3900pF(392) | | | 3 | | 5 | | | | | |
| 4700pF(472) | | | 3 | | 5 | | | | | |
| 5600pF(562) | | | 3 | | | 5 | | | | |
| 6800pF(682) | | | 3 | | | 5 | | | | |
| 8200pF(822) | | | 3 | | | 5 | | | | |
| 10000pF(103) | | | | 3 | | 5 | | | | |
| 12000pF(123) | | | | | | 5 | | | | |
| 15000pF(153) | | | | | | 5 | | | | |
| 18000pF(183) | | | | | | 5 | | | | |
| 22000pF(223) | | | | | | 5 | | | | |
| 27000pF(273) | | | | | | 5 | | | | |
| 33000pF(333) | | | | | | 5 | | | | |
| 39000pF(393) | | | | | | 5 | | | | |
| 47000pF(473) | | | | | | 5 | | | | |
| 56000pF(563) | | | | | | | 5 | 3 | | |
| 68000pF(683) | | | | | | | 5 | 3 | | |
| 82000pF(823) | | | | | | | 5 | 3 | | |
| 0.10μF(104) | | | | | | | 5 | 3 | | |
| 0.12μF(124) | | | | | | | | | 5 | |
| 0.15μF(154) | | | | | | | | | 5 | |
| 0.18μF(184) | | | | | | | | | 5 | |
| 0.22μF(224) | | | | | | | | | 5 | |
| 0.27μF(274) | | | | | | | | | 5 | |
| 0.33μF(334) | | | | | | | | | 5 | |
| 0.39μF(394) | | | | | | | | | 5 | |
| 0.47μF(474) | | | | | | | | | 5 | |
| 1.0μF(105) | | | | | | | | | | 5 |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

High Dielectric Constant Type X7R(R7) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 25(1E) | 16(1C) | 10(1A) |
| Capacitance | Tolerance | Part Number | | |
| 100pF(101) | ±10%(K) | GMD033R71E101KA01D | | |
| 120pF(121) | ±10%(K) | GMD033R71E121KA01D | | |
| 150pF(151) | ±10%(K) | GMD033R71E151KA01D | | |
| 180pF(181) | ±10%(K) | GMD033R71E181KA01D | | |
| 220pF(221) | ±10%(K) | GMD033R71E221KA01D | | |
| 270pF(271) | ±10%(K) | GMD033R71E271KA01D | | |
| 330pF(331) | ±10%(K) | GMD033R71E331KA01D | | |
| 390pF(391) | ±10%(K) | GMD033R71E391KA01D | | |
| 470pF(471) | ±10%(K) | GMD033R71E471KA01D | | |
| 560pF(561) | ±10%(K) | GMD033R71E561KA01D | | |
| 680pF(681) | ±10%(K) | GMD033R71E681KA01D | | |
| 820pF(821) | ±10%(K) | GMD033R71E821KA01D | | |
| 1000pF(102) | ±10%(K) | GMD033R71E102KA01D | | |
| 1200pF(122) | ±10%(K) | GMD033R71E122KA01D | | |
| 1500pF(152) | ±10%(K) | GMD033R71E152KA01D | | |
| 1800pF(182) | ±10%(K) | | GMD033R71C182KA11D | |
| 2200pF(222) | ±10%(K) | | GMD033R71C222KA11D | |
| 2700pF(272) | ±10%(K) | | GMD033R71C272KA11D | |
| 3300pF(332) | ±10%(K) | | GMD033R71C332KA11D | |
| 3900pF(392) | ±10%(K) | | | GMD033R71A392KA01D |
| 4700pF(472) | ±10%(K) | | | GMD033R71A472KA01D |
| 5600pF(562) | ±10%(K) | | | GMD033R71A562KA01D |
| 6800pF(682) | ±10%(K) | | | GMD033R71A682KA01D |
| 8200pF(822) | ±10%(K) | | | GMD033R71A822KA01D |
| 10000pF(103) | ±10%(K) | | | GMD033R71A103KA01D |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code

High Dielectric Constant Type X7R(R7) Characteristics

| LxW [mm] | | 1.0x0.5(15)<0402> | | |
|-------------------|-----------|--------------------|--------------------|--------------------|
| Rated Volt. [Vdc] | | 50(1H) | 25(1E) | 16(1C) |
| Capacitance | Tolerance | Part Number | | |
| 220pF(221) | ±10%(K) | GMD155R71H221KA01D | | |
| 270pF(271) | ±10%(K) | GMD155R71H271KA01D | | |
| 330pF(331) | ±10%(K) | GMD155R71H331KA01D | | |
| 390pF(391) | ±10%(K) | GMD155R71H391KA01D | | |
| 470pF(471) | ±10%(K) | GMD155R71H471KA01D | | |
| 560pF(561) | ±10%(K) | GMD155R71H561KA01D | | |
| 680pF(681) | ±10%(K) | GMD155R71H681KA01D | | |
| 820pF(821) | ±10%(K) | GMD155R71H821KA01D | | |
| 1000pF(102) | ±10%(K) | GMD155R71H102KA01D | | |
| 1200pF(122) | ±10%(K) | GMD155R71H122KA01D | | |
| 1500pF(152) | ±10%(K) | GMD155R71H152KA01D | | |
| 1800pF(182) | ±10%(K) | GMD155R71H182KA01D | | |
| 2200pF(222) | ±10%(K) | GMD155R71H222KA01D | | |
| 2700pF(272) | ±10%(K) | GMD155R71H272KA01D | | |
| 3300pF(332) | ±10%(K) | GMD155R71H332KA01D | | |
| 3900pF(392) | ±10%(K) | GMD155R71H392KA01D | | |
| 4700pF(472) | ±10%(K) | GMD155R71H472KA01D | | |
| 5600pF(562) | ±10%(K) | | GMD155R71E562KA01D | |
| 6800pF(682) | ±10%(K) | | GMD155R71E682KA01D | |
| 8200pF(822) | ±10%(K) | | GMD155R71E822KA01D | |
| 10000pF(103) | ±10%(K) | | GMD155R71E103KA01D | |
| 12000pF(123) | ±10%(K) | | GMD155R71E123KA01D | |
| 15000pF(153) | ±10%(K) | | GMD155R71E153KA01D | |
| 18000pF(183) | ±10%(K) | | GMD155R71E183KA01D | |
| 22000pF(223) | ±10%(K) | | GMD155R71E223KA01D | |
| 27000pF(273) | ±10%(K) | | GMD155R71E273KA11D | |
| 33000pF(333) | ±10%(K) | | GMD155R71E333KA11D | |
| 39000pF(393) | ±10%(K) | | GMD155R71E393KA11D | |
| 47000pF(473) | ±10%(K) | | GMD155R71E473KA11D | |
| 56000pF(563) | ±10%(K) | | | GMD155R71C563KA11D |
| 68000pF(683) | ±10%(K) | | | GMD155R71C683KA11D |
| 82000pF(823) | ±10%(K) | | | GMD155R71C823KA11D |
| 0.10μF(104) | ±10%(K) | | | GMD155R71C104KA11D |

The part number code is shown in () and Unit is shown in []. < >: EIA [inch] Code

8

(Part Number) **GM** **D** **15** **5** **R7** **1H** **221** **K** **A01** **D**

① Product ID ② Series
 ⑤ Temperature Characteristics
 ⑥ Capacitance Tolerance

③ Dimension (LxW)
 ⑥ Rated Voltage
 ⑨ Individual Specification Code

④ Dimension (T)
 ⑦ Capacitance
 ⑩ Packaging

Packaging Code in Part Number is a code shows STD 180mm Reel Taping.

High Dielectric Constant Type X5R(R6) Characteristics

| LxW [mm] | | 0.6x0.3(03)<0201> | 1.0x0.5(15)<0402> | |
|-------------------|-----------|---------------------|---------------------|---------------------|
| Rated Volt. [Vdc] | | 6.3(0J) | 10(1A) | 6.3(0J) |
| Capacitance | Tolerance | Part Number | | |
| 56000pF(563) | ±10%(K) | GMD033R60J563KE11D* | | |
| 68000pF(683) | ±10%(K) | GMD033R60J683KE11D* | | |
| 82000pF(823) | ±10%(K) | GMD033R60J823KE11D* | | |
| 0.10μF(104) | ±10%(K) | GMD033R60J104KE11D* | | |
| 0.12μF(124) | ±10%(K) | | GMD155R61A124KE12D* | |
| 0.15μF(154) | ±10%(K) | | GMD155R61A154KE12D* | |
| 0.18μF(184) | ±10%(K) | | GMD155R61A184KE12D* | |
| 0.22μF(224) | ±10%(K) | | GMD155R61A224KE12D* | |
| 0.27μF(274) | ±10%(K) | | GMD155R61A274KE11D* | |
| 0.33μF(334) | ±10%(K) | | GMD155R61A334KE11D* | |
| 0.39μF(394) | ±10%(K) | | GMD155R61A394KE11D* | |
| 0.47μF(474) | ±10%(K) | | GMD155R61A474KE11D* | |
| 1.0μF(105) | ±10%(K) | | | GMD155R60J105KE11D* |

The part number code is shown in () and Unit is shown in []. <->: EIA [inch] Code


*: Please refer to GMD series Specifications and Test Method(2).

GMD Series Specifications and Test Methods (1)

In case Non "" is added in PN's table, please refer to GMD Series Specifications and Test Methods (1).
 In case "" is added in PN's table, please refer to GMD Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | | |
|-----------|---|---|---|-----------|------------------|---------|-----------|---|-------|---|------|---|-------|
| 1 | Operating Temperature Range | R7 : -55°C to 125°C | Reference Temperature : 25°C | | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities. | Visual inspection. | | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions. | Using calipers. | | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormality. | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | | |
| 6 | Insulation Resistance | More than 10,000MΩ or 500Ω · F (Whichever is smaller) | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at normal temperature and humidity and within 2 minutes of charging. | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance. | The capacitance/D.F. should be measured at reference temperature at the frequency and voltage shown in the table. | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | R7 : W.V. 25Vmin. : 0.025 max. W.V. 16/10V : 0.035 max. | <table border="1"> <tr> <td>Frequency</td> <td>1±0.1kHz</td> </tr> <tr> <td>Voltage</td> <td>1±0.2Vrms</td> </tr> </table> | Frequency | 1±0.1kHz | Voltage | 1±0.2Vrms | | | | | | |
| Frequency | 1±0.1kHz | | | | | | | | | | | | |
| Voltage | 1±0.2Vrms | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias R7 : Within ±15% (-55°C to +125°C) | <p>The capacitance change should be measured after 5min. at each specified temp. stage.</p> <p>The ranges of capacitance change compared with the Reference Temperature value over the temperature ranges shown in the table should be within the specified ranges.*</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>125±3</td> </tr> </tbody> </table> <p>*Initial measurement for high dielectric constant type Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 | 3 | 25±2 | 4 | 125±3 |
| Step | Temperature (°C) | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | |
| 4 | 125±3 | | | | | | | | | | | | |
| 10 | Mechanical Strength | Bond Strength | MIL-STD-883 Method 2011 Condition D Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20) and bond a 25mm (0.001 inch) gold wire to the capacitor terminal using an ultrasonic ball bond. Then, pull wire. | | | | | | | | | | |
| | | Die Shear Strength | MIL-STD-883 Method 2019 Mount the capacitor on a gold metallized alumina substrate with Au-Sn (80/20). Apply the force parallel to the substrate. | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | Ramp frequency from 10 to 55Hz then return to 10Hz all within 1 minute. Amplitude : 1.5 mm (0.06 inch) max. total excursion. Apply this motion for a period of 2 hours in each of 3 mutually perpendicular directions (total 6 hours). | | | | | | | | | | |
| | | Capacitance | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | |
| 12 | Temperature Cycle | Appearance | The capacitor should be set for 24±2 hours at room temperature after one hour heat of treatment at 150+0/-10°C, then measure for the initial measurement. Fix the capacitor to the supporting jig in the same manner and under the same conditions as (11) and conduct the five cycles according to the temperatures and time shown in the following table. Set it for 24±2 hours at room temperature, then measure. | | | | | | | | | | |
| | | Capacitance Change | | | | | | | | | | | |
| | | D.F. | | | | | | | | | | | |
| | | I.R. | | | | | | | | | | | |
| | | Dielectric Strength | | | | | | | | | | | |

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding, when tests No.11 to 15 are performed.

Continued on the following page. 

GMD Series Specifications and Test Methods (1)

Continued from the preceding page.

**In case Non "" is added in PNs table, please refer to GMD Series Specifications and Test Methods (1).
 In case "" is added in PNs table, please refer to GMD Series Specifications and Test Methods (2).**



| No. | Item | Specifications | Test Method |
|-----|----------------------------|--------------------|--|
| 13 | Humidity (Steady State) | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R7 : Within $\pm 12.5\%$ |
| | | D.F. | R7 : W.V. 25Vmin. : 0.05 max. W.V. 16/10V : 0.05 max. |
| | | I.R. | More than 1,000M Ω or 50 $\Omega \cdot F$ (Whichever is smaller) |
| 14 | Humidity Load | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R7 : Within $\pm 12.5\%$ |
| | | D.F. | R7 : W.V. 25Vmin. : 0.05 max. W.V. 16/10V : 0.05 max. |
| | | I.R. | More than 500M Ω or 25 $\Omega \cdot F$ (Whichever is smaller) |
| 15 | High Temperature Load | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R7 : Within $\pm 12.5\%$ |
| | | D.F. | R7 : W.V. 25Vmin. : 0.05 max. W.V. 16/10V : 0.05 max. |
| | | I.R. | More than 1,000M Ω or 50 $\Omega \cdot F$ (Whichever is smaller) |

Set the capacitor for 500 ± 12 hours at 40 $\pm 2^\circ C$, in 90 to 95% humidity. Take it out and set it for 24 ± 2 hours at room temperature, then measure.

Apply the rated voltage for 500 ± 12 hours at 40 $\pm 2^\circ C$, in 90 to 95% humidity and set it for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.

A voltage treatment should be given to the capacitor, in which a DC voltage of 200% the rated voltage is applied for one hour at the maximum operating temperature $\pm 3^\circ C$ then it should be set for 24 ± 2 hours at room temperature and the initial measurement should be conducted. Then apply the above mentioned voltage continuously for 1000 ± 12 hours at the same temperature, remove it from the bath, and set it for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding. when tests No.11 to 15 are performed.

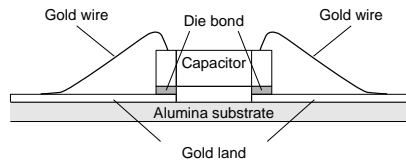

GMD Series Specifications and Test Methods (2)

In case Non "" is added in PNs table, please refer to GMD Series Specifications and Test Methods (1).
 In case "" is added in PNs table, please refer to GMD Series Specifications and Test Methods (2).

| No. | Item | Specifications | Test Method | | | | | | | | | |
|----------------------|---|----------------------------------|--|--|-----------|------------------|----------------------|----------|-------------|---------------------|----------|-------------|
| 1 | Operating Temperature Range | R6 : -55°C to 85°C | Reference Temperature : 25°C | | | | | | | | | |
| 2 | Rated Voltage | See the previous pages. | The rated voltage is defined as the maximum voltage which may be applied continuously to the capacitor. When AC voltage is superimposed on DC voltage, V ^{P-P} or V ^{O-P} , whichever is larger, should be maintained within the rated voltage range. | | | | | | | | | |
| 3 | Appearance | No defects or abnormalities. | Visual inspection. | | | | | | | | | |
| 4 | Dimensions | Within the specified dimensions. | Using calipers. | | | | | | | | | |
| 5 | Dielectric Strength | No defects or abnormalities. | No failure should be observed when 250% of the rated voltage is applied between the terminations for 1 to 5 seconds, provided the charge/discharge current is less than 50mA. | | | | | | | | | |
| 6 | Insulation Resistance | More than 50Ω · F | The insulation resistance should be measured with a DC voltage not exceeding the rated voltage at normal temperature and humidity and within 1 minutes of charging. | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance. | The capacitance/D.F. should be measured at reference temperature at the frequency and voltage shown in the table. | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | R6 : 0.1 max. | <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C ≤ 10μF (10Vmin.)*1</td> <td>1±0.1kHz</td> <td>1.0±0.2Vrms</td> </tr> <tr> <td>C ≤ 10μF (6.3Vmax.)</td> <td>1±0.1kHz</td> <td>0.5±0.1Vrms</td> </tr> </tbody> </table> | Capacitance | Frequency | Voltage | C ≤ 10μF (10Vmin.)*1 | 1±0.1kHz | 1.0±0.2Vrms | C ≤ 10μF (6.3Vmax.) | 1±0.1kHz | 0.5±0.1Vrms |
| | | | Capacitance | Frequency | Voltage | | | | | | | |
| C ≤ 10μF (10Vmin.)*1 | 1±0.1kHz | 1.0±0.2Vrms | | | | | | | | | | |
| C ≤ 10μF (6.3Vmax.) | 1±0.1kHz | 0.5±0.1Vrms | | | | | | | | | | |
| | | | *1 GMD155 R6 1A 124 to 224 are applied to 0.5±0.1 Vrms. | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | No bias | R6 : Within ±15% (-55°C to +85°C) | | | | | | | | | |
| | | | | <p>The capacitance change should be measured after 5min. at each specified temp. stage.</p> <p>The ranges of capacitance change compared with the Reference Temperature value over the temperature ranges shown in the table should be within the specified ranges.*</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>-55±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>85±3</td> </tr> </tbody> </table> <p>*Initial measurement for high dielectric constant type Perform a heat treatment at 150 +0/-10°C for one hour and then let sit for 24±2 hours at room temperature. Perform the initial measurement.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | -55±3 | 3 | 25±2 |
| Step | Temperature (°C) | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | |
| 2 | -55±3 | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | |
| 4 | 85±3 | | | | | | | | | | | |
| 10 | Mechanical Strength | Bond Strength | Pull force : 0.03N min. | | | | | | | | | |
| | | Die Shear Strength | Die Shear force : 2N min. | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | No defects or abnormalities. | | | | | | | | | |
| | | Capacitance | Within the specified tolerance. | | | | | | | | | |
| | | D.F. | R6 : 0.1 max. | | | | | | | | | |
| 12 | Temperature Sudden Change | Appearance | No defects or abnormalities. | | | | | | | | | |
| | | Capacitance Change | R6 : Within ±7.5% | | | | | | | | | |
| | | D.F. | R6 : 0.1 max. | | | | | | | | | |
| | | I.R. | More than 50Ω · F | | | | | | | | | |
| | | Dielectric Strength | No defects | | | | | | | | | |

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding. when tests No.11 to 14 are performed.

Continued on the following page. ↗

GMD Series Specifications and Test Methods (2)

Continued from the preceding page.

**In case Non "*" is added in PNs table, please refer to GMD Series Specifications and Test Methods (1).
 In case "*" is added in PNs table, please refer to GMD Series Specifications and Test Methods (2).**

| No. | Item | Specifications | Test Method |
|-----|--|--------------------|--------------------------------|
| 13 | High Temperature High Humidity (Steady) | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R6 : Within $\pm 12.5\%$ |
| | | D.F. | R6 : 0.2 max. |
| | | I.R. | More than $12.5\Omega \cdot F$ |
| 14 | Durability | Appearance | No defects or abnormalities. |
| | | Capacitance Change | R6 : Within $\pm 12.5\%$ |
| | | D.F. | R6 : 0.2 max. |
| | | I.R. | More than $25\Omega \cdot F$ |

Apply the rated voltage for 500 ± 12 hours at $40 \pm 2^\circ\text{C}$, in 90 to 95% humidity and set it for 24 ± 2 hours at room temperature, then measure. The charge/discharge current is less than 50mA.


- Initial measurement
Perform a heat treatment at $150+0/-10^\circ\text{C}$ for one hour and then let sit for 24 ± 2 hours at room temperature. Perform the initial measurement.
- Measurement after test
Perform a heat treatment at $150+0/-10^\circ\text{C}$ for one hour and then let sit for 24 ± 2 hours at room temperature, then measure.

Apply 150%*2 of the rated voltage for 1000 ± 12 hours at the maximum operating temperature $\pm 3^\circ\text{C}$. Let sit for 24 ± 2 hours at room temperature, then measure. The charge/ discharge current is less than 50mA.

*2 GMD155 R6 1A 274 to 474 are applied to 120%.

- Initial measurement
Perform a heat treatment at $150+0/-10^\circ\text{C}$ for one hour and then let sit for 24 ± 2 hours at room temperature. Perform the initial measurement.
- Measurement after test
Perform a heat treatment at $150+0/-10^\circ\text{C}$ for one hour and then let sit for 24 ± 2 hours at room temperature, then measure.

Mounting for testing : The capacitors should be mounted on the substrate as shown below using die bonding. when tests No.11 to 14 are performed.

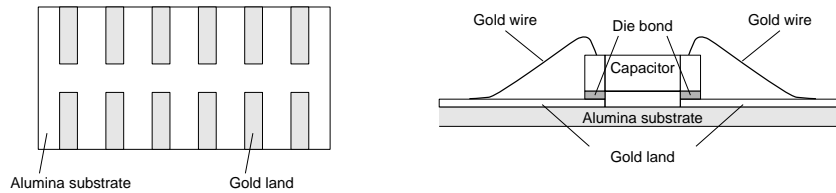


Package

Minimum Quantity Guide

| Part Number | Dimensions (mm) | | | Quantity (pcs.) | | | | | | |
|---------------------|-----------------|------|------|-----------------|----------------------|----------------------|----------------------|-----------|----------------------|-------|
| | | | | ø180mm Reel | | ø330mm Reel | | Bulk Case | Bulk Bag | |
| Packaging Code | L | W | T | Paper Tape | Embossed Tape | Paper Tape | Embossed Tape | | | C |
| For General Purpose | GRM02 | 0.4 | 0.2 | 0.2 | 20,000 ¹⁾ | 40,000 ¹⁾ | - | - | - | 1,000 |
| | GRM03 | 0.6 | 0.3 | 0.3 | 15,000 | - | 50,000 | - | - | 1,000 |
| | GRM15 | 1.0 | 0.5 | 0.25/0.3 | 10,000 | - | 50,000 | - | - | 1,000 |
| | | | | 0.5 | 10,000 | - | 50,000 | - | 50,000 | 1,000 |
| | GRM18 | 1.6 | 0.8 | 0.5 | 4,000 | - | 10,000 | - | - | 1,000 |
| | | | | 0.8 | 4,000 | - | 10,000 | - | 15,000 ²⁾ | 1,000 |
| | GRM21 | 2.0 | 1.25 | 0.6 | 4,000 | - | 10,000 | - | 10,000 | 1,000 |
| | | | | 0.85 | 4,000 | - | 10,000 | - | - | 1,000 |
| | GRM31 | 3.2 | 1.6 | 1.0/1.25 | - | 3,000 | - | 10,000 | 5,000 ²⁾ | 1,000 |
| | | | | 0.6/0.85 | 4,000 | - | 10,000 | - | - | 1,000 |
| | | | | 1.15 | - | 3,000 | - | 10,000 | - | 1,000 |
| | GRM32 | 3.2 | 2.5 | 1.6 | - | 2,000 | - | 6,000 | - | 1,000 |
| | | | | 0.85 | 4,000 | - | 10,000 | - | - | 1,000 |
| | | | | 1.15 | - | 3,000 | - | 10,000 | - | 1,000 |
| | | | | 1.35 | - | 2,000 | - | 8,000 | - | 1,000 |
| | GRM43 | 4.5 | 3.2 | 1.6 | - | 2,000 | - | 6,000 | - | 1,000 |
| | | | | 1.8/2.0 | - | 1,000 | - | 4,000 | - | 1,000 |
| | | | | 2.5 | - | 1,000 | - | 5,000 | - | 1,000 |
| | | | | 1.15 | - | 1,000 | - | 4,000 | - | 1,000 |
| | GRM55 | 5.7 | 5.0 | 1.35/1.6 | - | 1,000 | - | 4,000 | - | 1,000 |
| 1.8/2.0 | | | | - | 500 | - | 2,000 | - | 500 | |
| 2.5 | | | | - | 500 | - | 2,000 | - | 500 | |
| 3.2 | | | | - | 300 | - | 1,500 | - | 500 | |
| High Power Type | GJM03 | 0.6 | 0.3 | 0.3 | 15,000 | - | 50,000 | - | 1,000 | |
| | GJM15 | 1.0 | 0.5 | 0.5 | 10,000 | - | 50,000 | - | 50,000 | |
| High Frequency | GQM18 | 1.6 | 0.8 | 0.7/0.8 | 4,000 | - | 10,000 | - | 1,000 | |
| | GQM21 | 2.0 | 1.25 | 0.85 | 4,000 | - | 10,000 | - | 1,000 | |
| | ERB18 | 1.6 | 0.8 | 0.9 max. | 4,000 | - | 10,000 | - | 1,000 | |
| | ERB21 | 2.0 | 1.25 | 1.35 max. | - | 3,000 | - | 10,000 | 1,000 | |
| | ERB32 | 3.2 | 2.5 | 1.7 max. | - | 2,000 | - | 8,000 | 1,000 | |
| Microchip | GMA0D | 0.38 | 0.38 | 0.3 | - | - | - | - | 400 ³⁾ | |
| | GMA05 | 0.5 | 0.5 | 0.35 | - | - | - | - | 400 ³⁾ | |
| | GMA08 | 0.8 | 0.8 | 0.5 | - | - | - | - | 400 ³⁾ | |
| | GMD03 | 0.6 | 0.3 | 0.3 | 15,000 | - | 50,000 | - | 1,000 | |
| | GMD15 | 1.0 | 0.5 | 0.5 | 10,000 | - | 50,000 | - | 1,000 | |
| Array | GNM0M | 0.9 | 0.6 | 0.45 | 10,000 | - | 50,000 | - | 1,000 | |
| | GNM1M | 1.37 | 1.0 | 0.5/0.6/0.8 | 4,000 | - | 10,000 | - | 1,000 | |
| | GNM21 | 2.0 | 1.25 | 0.5/0.6/0.85 | 4,000 | - | 10,000 | - | 1,000 | |
| | | | | 0.8/0.85 | 4,000 | - | 10,000 | - | 1,000 | |
| Low ESL | LLL15 | 0.5 | 1.0 | 0.3 | 10,000 ⁴⁾ | - | 50,000 ⁴⁾ | - | 1,000 | |
| | | | | 0.5 | - | 4,000 | - | 10,000 | - | 1,000 |
| | LLL21 | 1.25 | 2.0 | 0.5/0.6 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 0.85 | - | 3,000 | - | 10,000 | 1,000 | |
| | LLL31 | 1.6 | 3.2 | 0.5/0.7 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 1.15 | - | 3,000 | - | 10,000 | 1,000 | |
| | LLA18 | 1.6 | 0.8 | 0.5 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 0.5 | - | 4,000 | - | 10,000 | 1,000 | |
| | LLA21 | 2.0 | 1.25 | 0.5 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 0.85 | - | 3,000 | - | 10,000 | 1,000 | |
| | LLA31 | 3.2 | 1.6 | 0.5 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 0.85 | - | 3,000 | - | 10,000 | 1,000 | |
| | LLM21 | 2.0 | 1.25 | 0.5 | - | 4,000 | - | 10,000 | 1,000 | |
| | | | | 1.15 | - | 3,000 | - | 10,000 | 1,000 | |
| LLM31 | 3.2 | 1.6 | 0.5 | - | 4,000 | - | 10,000 | 1,000 | | |
| | | | 0.5 | - | 4,000 | - | 10,000 | 1,000 | | |

1) 8mm width 2mm pitch Paper Taping. 4mm width 1mm pitch Embossed Taping.
 2) There are parts number without bulk case.
 3) Tray
 4) LLL15: ø180mm Reel Paper Taping Packaging Code: E, ø330mm Reel Paper Taping Packaging Code: F


Continued on the following page. 

Package


Continued from the preceding page.

■ Tape Carrier Packaging

(1) Dimensions of Reel

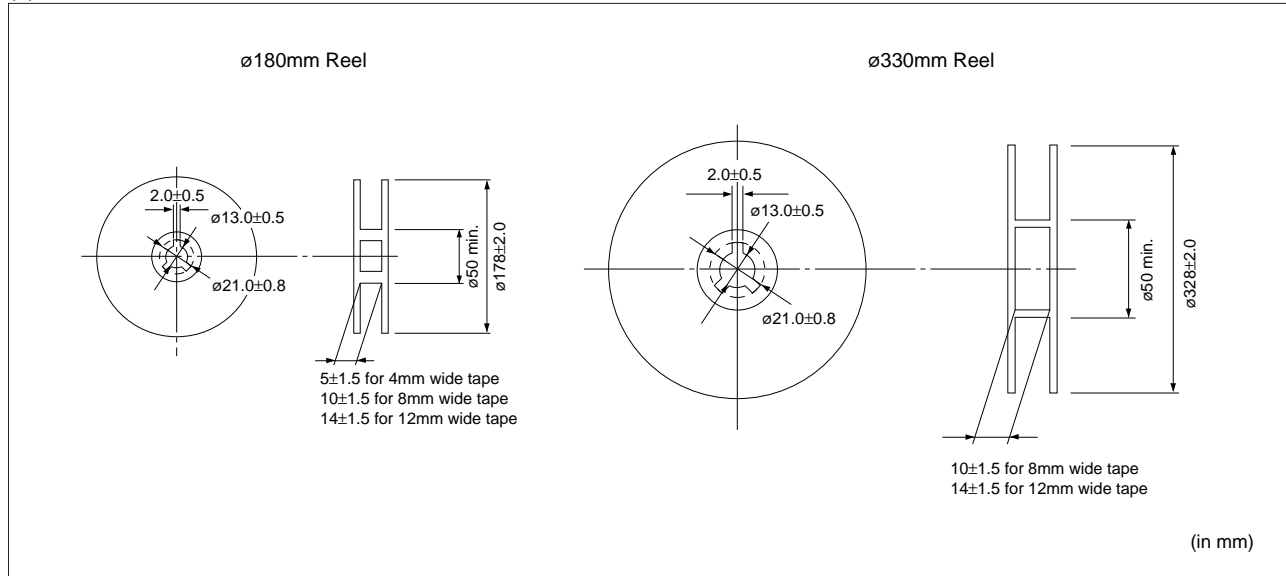

(2) Dimensions of Paper Tape

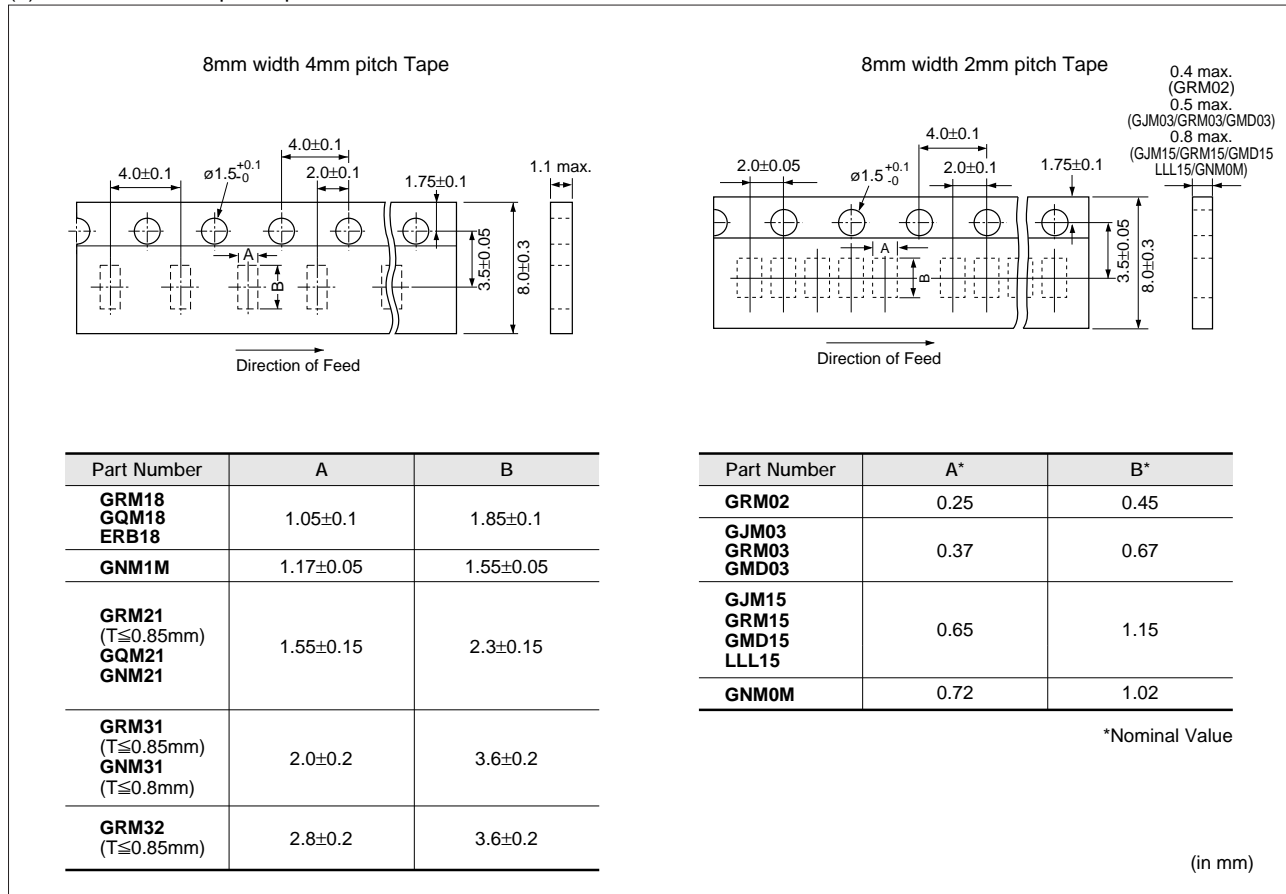


Continued on the following page. ↗

Package

Continued from the preceding page.



(3) Dimensions of Embossed Tape

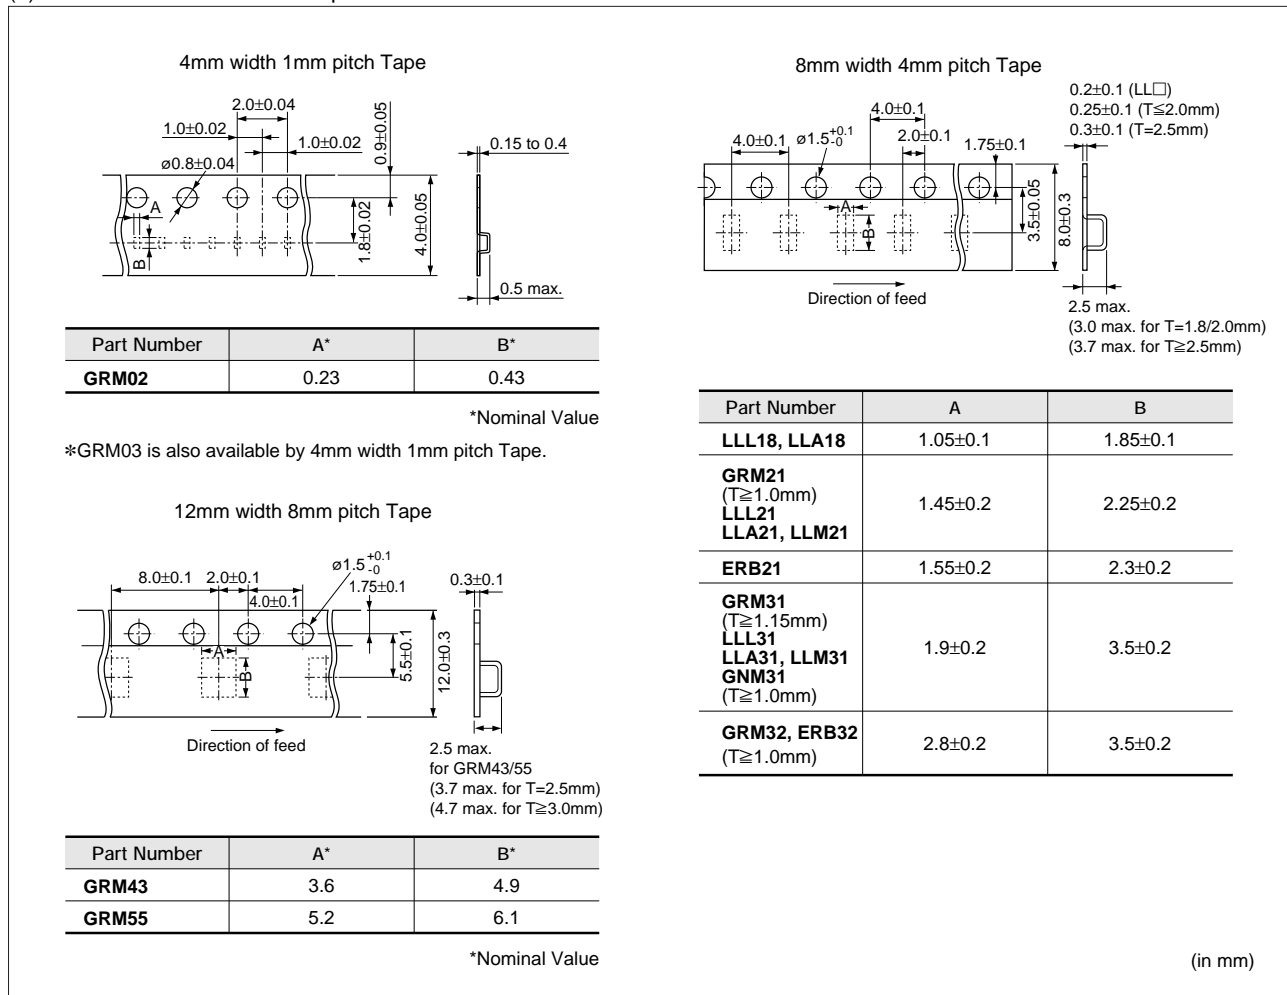

(4) Taping Method

- ① Tapes for capacitors are wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.
- ② Part of the leader and part of the empty tape should be attached to the end of the tape as follows.
- ③ The top tape and base tape are not attached at the end of the tape for a minimum of 5 pitches.
- ④ Missing capacitors number within 0.1% of the number per reel or 1 pc, whichever is greater, and are not continuous.
- ⑤ The top tape and bottom tape should not protrude beyond the edges of the tape and should not cover sprocket holes.
- ⑥ Cumulative tolerance of sprocket holes, 10 pitches: ±0.3mm.
- ⑦ Peeling off force: 0.1 to 0.6N* in the direction shown below.

*GRM02
 GRM03
 GJM03
 GMD03 } : 0.05 to 0.5N

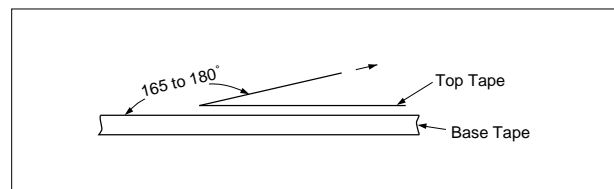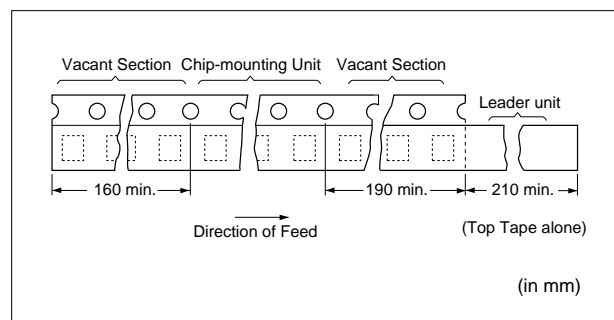


Continued on the following page.

Package

☒ Continued from the preceding page.

■ Dimensions of Bulk Case Packaging

The bulk case uses antistatic materials. Please contact Murata for details.

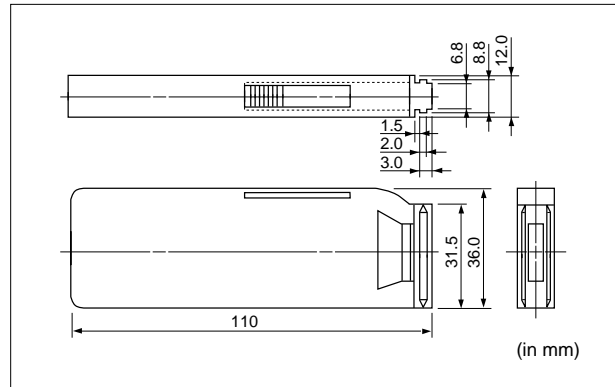

⚠ Caution

■ Storage and Operation condition

1. The performance of chip monolithic ceramic capacitors may be affected by the storage conditions.
 - 1-1. Store capacitors in the following conditions:
Temperature of +5°C to +40°C and a Relative Humidity of 20% to 70%.
 - (1) Sunlight, dust, rapid temperature changes, corrosive gas atmosphere or high temperature and humidity conditions during storage may affect the solderability and the packaging performance. Please use product within six months of receipt.
 - (2) Please confirm solderability before using after six months. Store the capacitors without opening the original bag. Even if the storage period is short, do not exceed the specified atmospheric conditions.
 - 1-2. Corrosive gas can react with the termination (external) electrodes or lead wires of capacitors, and result in poor solderability. Do not store the capacitors in an atmosphere consisting of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas, etc.).
 - 1-3. Due to moisture condensation caused by rapid humidity changes, or the photochemical change caused by direct sunlight on the terminal electrodes and/or the resin/epoxy coatings, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or in high humidity conditions.



Rating

1. Temperature Dependent Characteristics

1. The electrical characteristics of the capacitor can change with temperature.

1-1. For capacitors having larger temperature dependency, the capacitance may change with temperature changes.


The following actions are recommended in order to insure suitable capacitance values.

(1) Select a suitable capacitance for the operating temperature range.


(2) The capacitance may change within the rated temperature.

When you use a high dielectric constant type capacitors in a circuit that needs a tight (narrow) capacitance tolerance. Example: a time constant circuit., please carefully consider the characteristics of these capacitors, such as their aging, voltage, and temperature characteristics. And check capacitors using your actual appliances at the intended environment and operating conditions.


Typical Temperature Characteristics Char. R6(X5R)

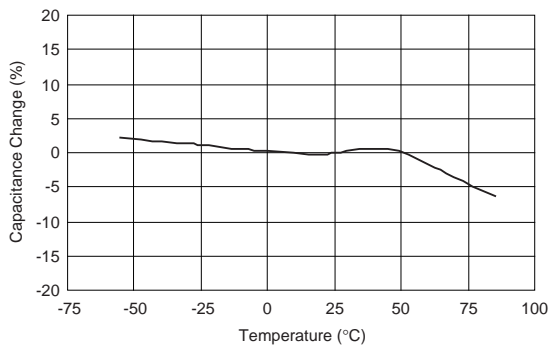

Typical Temperature Characteristics Char. R7(X7R)

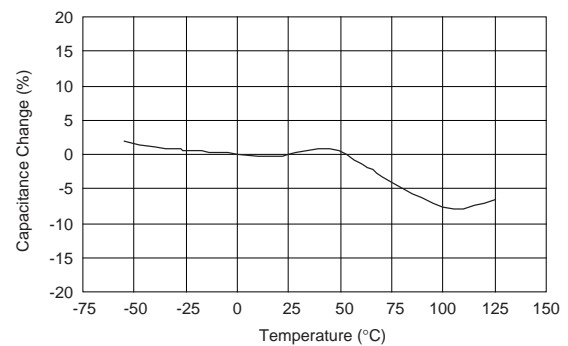

Typical Temperature Characteristics Char. F5(Y5V)

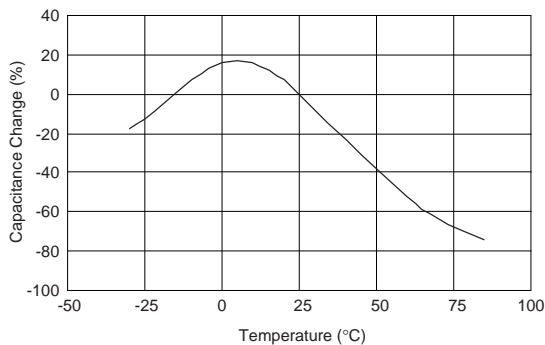

2. Measurement of Capacitance

1. Measure capacitance with the voltage and the frequency specified in the product specifications.

1-1. The output voltage of the measuring equipment may decrease when capacitance is high occasionally. Please confirm whether a prescribed measured voltage is impressed to the capacitor.

1-2. The capacitance values of high dielectric constant type capacitors change depending on the AC voltage applied. Please consider the AC voltage characteristics when selecting a capacitor to be used in a AC circuit.

Continued on the following page.


⚠ Caution

☞ Continued from the preceding page.

3. Applied Voltage

1. Do not apply a voltage to the capacitor that exceeds the rated voltage as called-out in the specifications.
 - 1-1. Applied voltage between the terminals of a capacitor shall be less than or equal to the rated voltage.
 - (1) When AC voltage is superimposed on DC voltage, the zero-to-peak voltage shall not exceed the rated DC voltage.
When AC voltage or pulse voltage is applied, the peak-to-peak voltage shall not exceed the rated DC voltage.
 - (2) Abnormal voltages (surge voltage, static electricity, pulse voltage, etc.) shall not exceed the rated DC voltage.

Typical Voltage Applied to the DC Capacitor

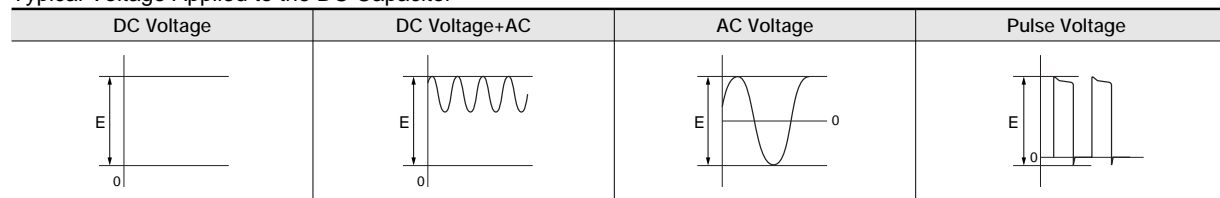

(E: Maximum possible applied voltage.)

1-2. Influence of overvoltage

Overvoltage that is applied to the capacitor may result in an electrical short circuit caused by the breakdown of the internal dielectric layers .
The time duration until breakdown depends on the applied voltage and the ambient temperature.

4. Applied Voltage and Self-heating Temperature

1. When the capacitor is used in a high-frequency voltage, pulse voltage, application, be sure to take into account self-heating may be caused by resistant factors of the capacitor.
 - 1-1. The load should be contained to the level such that when measuring at atomospheric temperature of 25°C, the product's self-heating remains below 20°C and surface temperature of the capacitor in the actual circuit remains wiyhin the maximum operating temperature.

Continued on the following page. ☞



Continued from the preceding page.

5. DC Voltage and AC Voltage Characteristic

1. The capacitance value of a high dielectric constant type capacitor changes depending on the DC voltage applied. Please consider the DC voltage characteristics when a capacitor is selected for use in a DC circuit.

1-1. The capacitance of ceramic capacitors may change sharply depending on the applied voltage. (See figure)


Please confirm the following in order to secure the capacitance.

- (1) Whether the capacitance change caused by the applied voltage is within the range allowed or not.
- (2) In the DC voltage characteristics, the rate of capacitance change becomes larger as voltage increases. Even if the applied voltage is below the rated voltage. When a high dielectric constant type capacitor is in a circuit that needs a tight (narrow) capacitance tolerance. Example: a time constant circuit., please carefully consider the characteristics of these capacitors, such as their aging, voltage, and temperature characteristics. And check capacitors using your actual appliances at the intended environment and operating conditions.


2. The capacitance values of high dielectric constant type capacitors change depending on the AC voltage applied.

Please consider the AC voltage characteristics when selecting a capacitor to be used in a AC circuit.

[DC Voltage Characteristics]

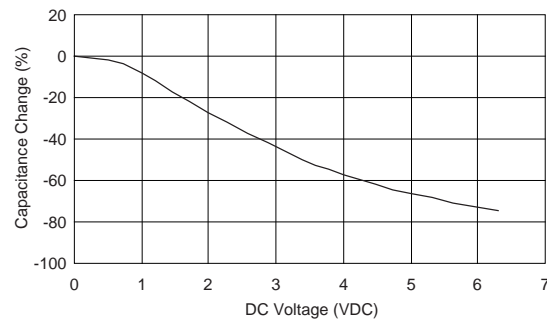


[AC Voltage Characteristics]

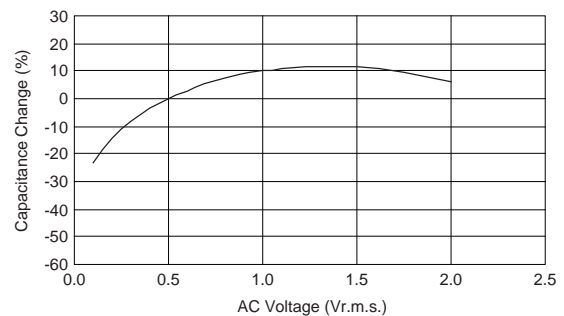

6. Capacitance Aging

1. The high dielectric constant type capacitors have the characteristic in which the capacitance value decreases with passage of time.

When you use a high dielectric constant type capacitors in a circuit that needs a tight (narrow) capacitance tolerance. Example: a time constant circuit., please carefully consider the characteristics of these capacitors, such as their aging, voltage, and temperature characteristics. And check capacitors using your actual appliances at the intended environment and operating conditions.

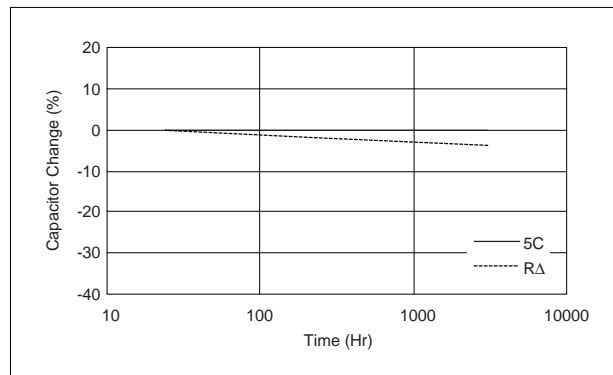



Continued on the following page. ↗

⚠ Caution

☒ Continued from the preceding page.

7. Vibration and Shock

1. The capacitors mechanical stress (vibration and shock) shall be specified for the use environment.
Please confirm the kind of vibration and/or shock, its condition, and any generation of resonance.
Please mount the capacitor so as not to generate resonance, and do not allow any impact on the terminals.
2. Mechanical shock due to falling may cause damage or a crack in the dielectric material of the capacitor.
Do not use a fallen capacitor because the quality and reliability may be deteriorated.
3. When printed circuit boards are piled up or handled, the corners of another printed circuit board should not be allowed to hit the capacitor in order to avoid a crack or other damage to the capacitor.

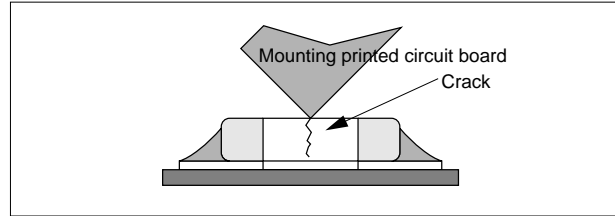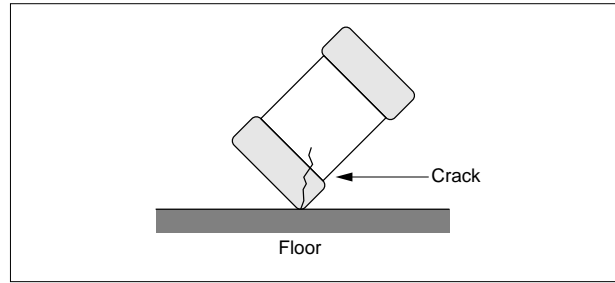


Caution

■ Soldering and Mounting

1. Mounting Position

1. Confirm the best mounting position and direction that minimizes the stress imposed on the capacitor during flexing or bending the printed circuit board.
 - 1-1. Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.

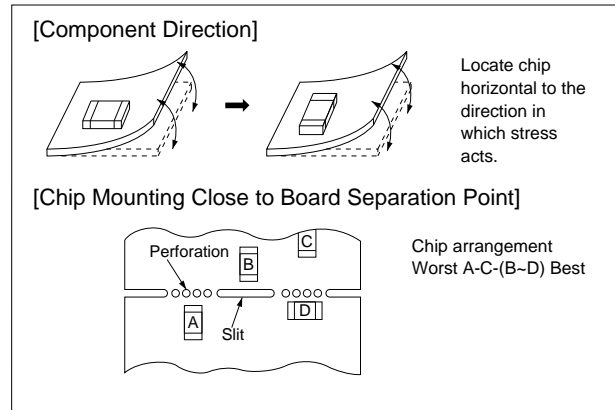


2. Information before Mounting

1. Do not re-use capacitors that were removed from the equipment.
2. Confirm capacitance characteristics under actual applied voltage.
3. Confirm the mechanical stress under actual process and equipment use.
4. Confirm the rated capacitance, rated voltage and other electrical characteristics before assembly.

5. Prior to use, confirm the Solderability for the capacitors that were in long-term storage.
6. Prior to measuring capacitance, carry out a heat treatment for capacitors that were in long-term storage.
7. The use of Sn-Zn based solder will deteriorate the reliability of the MLCC.
Please contact our sales representative or product engineers on the use of Sn-Zn based solder in advance.

3. Maintenance of the Mounting (pick and place) Machine

1. Make sure that the following excessive forces are not applied to the capacitors.
 - 1-1. In mounting the capacitors on the printed circuit board, any bending force against them shall be kept to a minimum to prevent them from any bending damage or cracking. Please take into account the following precautions and recommendations for use in your process.
 - (1) Adjust the lowest position of the pickup nozzle so as not to bend the printed circuit board.
 - (2) Adjust the nozzle pressure within a static load of 1N to 3N during mounting.
2. Dirt particles and dust accumulated between the suction nozzle and the cylinder inner wall prevent the nozzle from moving smoothly. This imposes greater force upon the chip during mounting, causing cracked chips. Also the locating claw, when worn out, imposes uneven forces on the chip when positioning, causing cracked chips. The suction nozzle and the locating claw must be maintained, checked and replaced periodically.

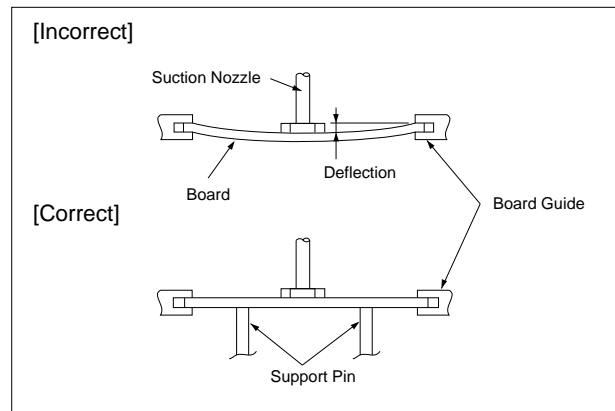

Continued on the following page. ↗

⚠ Caution

☐ Continued from the preceding page.

4-1. Reflow Soldering

- When sudden heat is applied to the components, the mechanical strength of the components will decrease because a sudden temperature change causes deformation inside the components. In order to prevent mechanical damage to the components, preheating is required for both the components and the PCB board. Preheating conditions are shown in table 1. It is required to keep the temperature differential between the solder and the components surface (ΔT) as small as possible.
- Solderability of Tin plating termination chips might be deteriorated when a low temperature soldering profile where the peak solder temperature is below the melting point of Tin is used. Please confirm the Solderability of Tin plated termination chips before use.
- When components are immersed in solvent after mounting, be sure to maintain the temperature difference (ΔT) between the component and the solvent within the range shown in the table 1.

Table 1

| Part Number | Temperature Differential |
|--|-----------------------------------|
| GRM02/03/15/18/21/31 GJM03/15 LLL15/18/21/31 ERB18/21 GQM18/21 | $\Delta T \leq 190^\circ\text{C}$ |
| GRM32/43/55 LLA18/21/31 LLM21/31 GNM ERB32 | $\Delta T \leq 130^\circ\text{C}$ |

Recommended Conditions

| | Pb-Sn Solder | | Lead Free Solder |
|------------------|-----------------|--------------|-----------------------|
| | Infrared Reflow | Vapor Reflow | |
| Peak Temperature | 230 to 250°C | 230 to 240°C | 240 to 260°C |
| Atmosphere | Air | Air | Air or N ₂ |

Pb-Sn Solder: Sn-37Pb
 Lead Free Solder: Sn-3.0Ag-0.5Cu



4. Optimum Solder Amount for Reflow Soldering

- Overly thick application of solder paste results in a excessive solder fillet height. This makes the chip more susceptible to mechanical and thermal stress on the board and may cause the chips to crack.
- Too little solder paste results in a lack of adhesive strength on the outer electrode, which may result in chips breaking loose from the PCB.
- Make sure the solder has been applied smoothly to the end surface to a height of 0.2mm* min.


Inverting the PCB

Make sure not to impose any abnormal mechanical shocks to the PCB.


[Standard Conditions for Reflow Soldering]

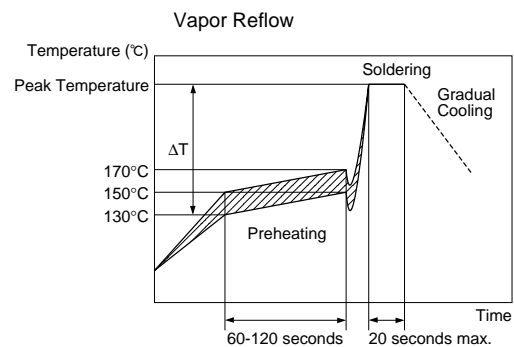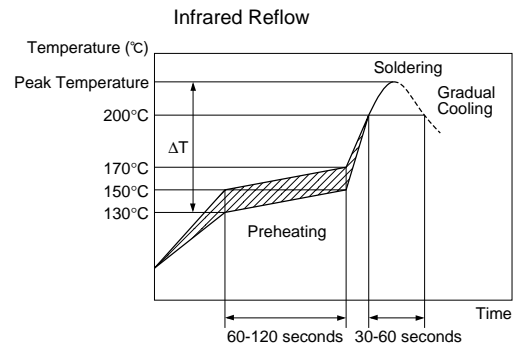

[Allowable Reflow Soldering Temperature and Time]

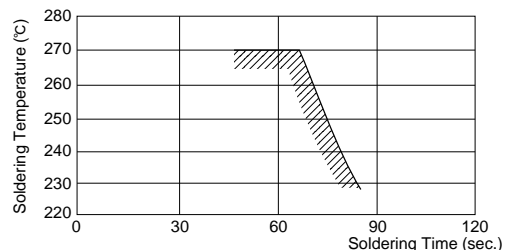

In case of repeated soldering, the accumulated soldering time must be within the range shown above.



* GRM02/03: 1/3 of Chip Thickness min.

in section



Continued from the preceding page.

4-2. Flow Soldering

- When sudden heat is applied to the components, the mechanical strength of the components will decrease because a sudden temperature change causes deformation inside the components. In order to prevent mechanical damage in the components, preheating should be required for both of the components and the PCB board.
Preheating conditions are shown in table 2. It is required to keep temperature differential between the solder and the components surface (ΔT) as small as possible.
- Excessively long soldering time or high soldering temperature can result in leaching of the outer electrodes, causing poor adhesion or a reduction in capacitance value due to loss of contact between electrodes and end termination.
- When components are immersed in solvent after mounting, be sure to maintain the temperature difference (ΔT) between the component and solvent within the range shown in the table 2.
- Do not apply flow soldering to chips not listed in table 2.

Table 2

| Part Number | Temperature Differential |
|-------------|-----------------------------------|
| GRM18/21/31 | $\Delta T \leq 150^\circ\text{C}$ |
| LLL21/31 | |
| ERB18/21 | |
| GQM18/21 | |

Recommended Conditions


| | Pb-Sn Solder | Lead Free Solder |
|-----------------------------|--------------|------------------|
| Preheating Peak Temperature | 90 to 110°C | 100 to 120°C |
| Soldering Peak Temperature | 240 to 250°C | 250 to 260°C |
| Atmosphere | Air | N ₂ |

Pb-Sn Solder: Sn-37Pb
 Lead Free Solder: Sn-3.0Ag-0.5Cu


5. Optimum Solder Amount for Flow Soldering

- The top of the solder fillet should be lower than the thickness of components. If the solder amount is excessive, the risk of cracking is higher during board bending or any other stressful condition.


[Standard Conditions for Flow Soldering]

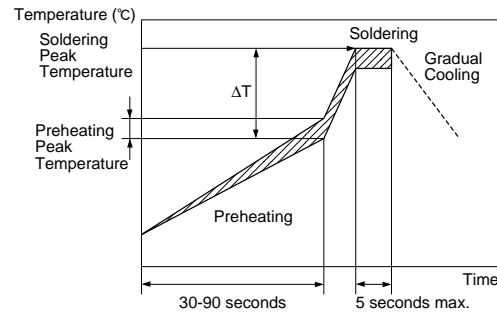

[Allowable Flow Soldering Temperature and Time]

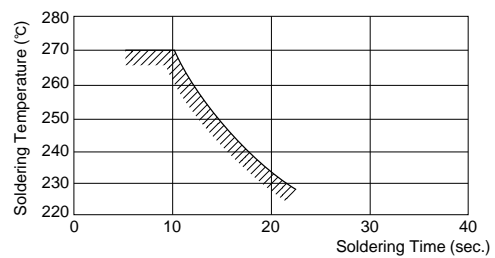

In case of repeated soldering, the accumulated soldering time must be within the range shown above.

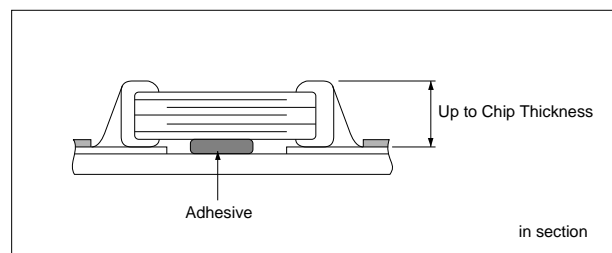

Continued on the following page. ↗

⚠ Caution

☒ Continued from the preceding page.

4-3. Correction with a Soldering Iron

1. When sudden heat is applied to the components when using a soldering iron, the mechanical strength of the components will decrease because the extreme temperature change can cause deformations inside the components. In order to prevent mechanical damage to the components, preheating is required for both the components and the PCB board. Preheating conditions, (The "Temperature of the Soldering Iron Tip", "Preheating Temperature", "Temperature Differential" between the iron tip and the components and the PCB), should be within the conditions of table 3. It is required to keep the temperature differential between the soldering iron and the component surfaces (ΔT) as small as possible.
2. After soldering, do not allow the component/PCB to rapidly cool down.
3. The operating time for the re-working should be as short as possible. When re-working time is too long, it may cause solder leaching, and that will cause a reduction in the adhesive strength of the terminations.
4. Optimum Solder amount when re-working with a Soldering Iron

- 4-1. In case of sizes smaller than 0603, (GRM03/15/18, GJM03/15, QM18, ERB18), the top of the solder fillet should be lower than 2/3's of the thickness of the component or 0.5mm whichever is smaller. In case of 0805 and larger sizes, (GRM21/31/32/43/55, QM21, ERB21/32), the top of the solder fillet should be lower than 2/3's of the thickness of the component. If the solder amount is excessive, the risk of cracking is higher during board bending or under any other stressful condition.
- 4-2. A soldering iron with a tip of $\phi 3\text{mm}$ or smaller should be used. It is also necessary to keep the soldering iron from touching the components during the re-work.
- 4-3. Solder wire with $\phi 0.5\text{mm}$ or smaller is required for soldering.

4-4. Leaded Component Insertion

1. If the PCB is flexed when leaded components (such as transformers and ICs) are being mounted, chips may crack and solder joints may break.
Before mounting leaded components, support the PCB using backup pins or special jigs to prevent warping.

5. Washing

Excessive ultrasonic oscillation during cleaning can cause the PCBs to resonate, resulting in cracked chips or broken solder joints. Take note not to vibrate PCBs.


Table 3

| Part Number | Temperature of Soldering Iron Tip | Preheating Temperature | Temperature Differential (ΔT) | Atmosphere |
|--|-----------------------------------|------------------------|---|------------|
| GRM03/15/18/21/31 GJM03/15 QM18/21 ERB18/21 | 350°C max. | 150°C min. | $\Delta T \leq 190^\circ\text{C}$ | Air |
| GRM32/43/55 ERB32 | 280°C max. | 150°C min. | $\Delta T \leq 130^\circ\text{C}$ | Air |

*Applicable for both Pb-Sn and Lead Free Solder.

Pb-Sn Solder: Sn-37Pb

Lead Free Solder: Sn-3.0Ag-0.5Cu

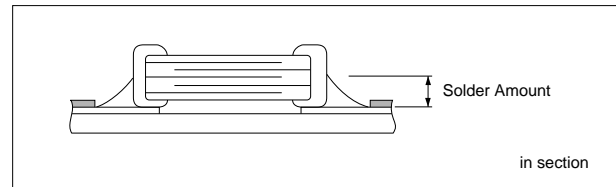

Continued on the following page. ☒

Caution


Continued from the preceding page.

6. Electrical Test on Printed Circuit Board

1. Confirm position of the support pin or specific jig, when inspecting the electrical performance of a capacitor after mounting on the printed circuit board.
 - 1-1. Avoid bending printed circuit board by the pressure of a test pin, etc.

The thrusting force of the test probe can flex the PCB, resulting in cracked chips or open solder joints.


Provide support pins on the back side of the PCB to prevent warping or flexing.
 - 1-2. Avoid vibration of the board by shock when a test pin contacts a printed circuit board.

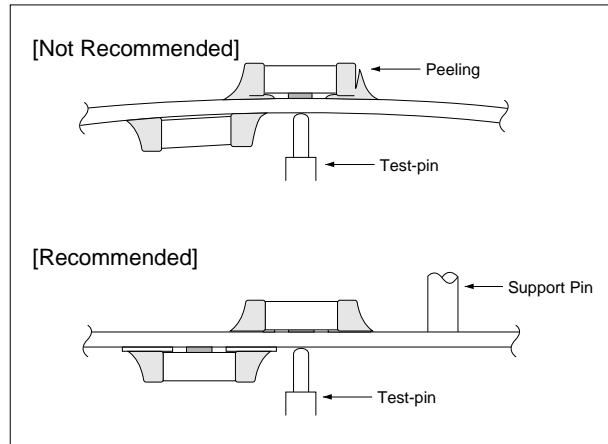

7. Printed Circuit Board Cropping

1. After mounting a capacitor on a printed circuit board, do not apply any stress to the capacitor that is caused by bending or twisting the board.
 - 1-1. In cropping the board, the stress as shown right may cause the capacitor to crack.

Try not to apply this type of stress to a capacitor.


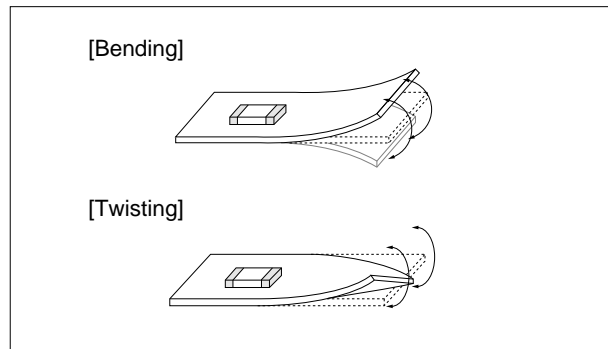


2. Check of the cropping method for the printed circuit board in advance.
 - 2-1. Printed circuit board cropping shall be carried out by using a jig or an apparatus to prevent the mechanical stress which can occur to the board.

(1) Example of a suitable jig

Recommended example: the board should be pushed as close to the near the cropping jig as possible and from the back side of board in order to minimize the compressive stress applied to capacitor.

Not recommended example* when the board is pushed at a point far from the cropping jig and from the front side of board as below, the capacitor may form a crack caused by the tensile stress applied to capacitor.

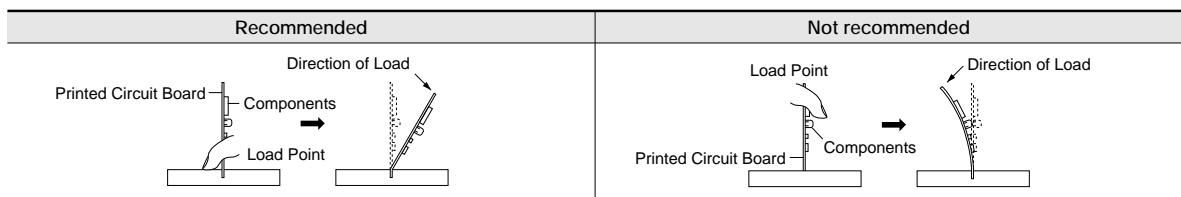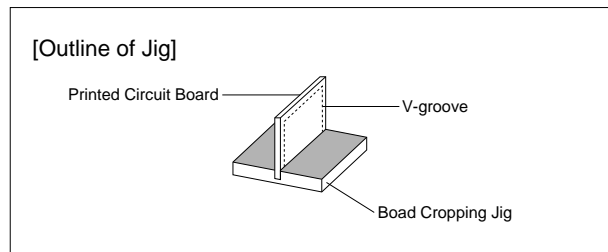

Continued on the following page.


! Caution

Continued from the preceding page.

(2) Example of a suitable machine

An outline of a printed circuit board cropping machine is shown as follows. Along the lines with the V-grooves on printed circuit board, the top and bottom blades are aligned to one another when cropping the board.

The misalignment of the position between top and bottom blades may cause the capacitor to crack.

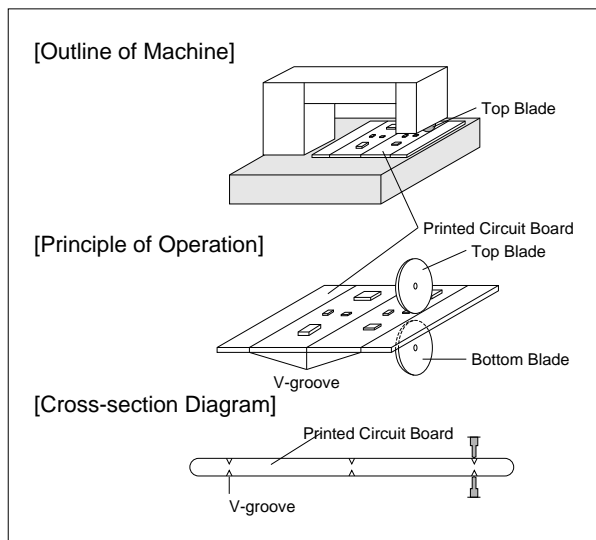

| Recommended | Not Recommended | | |
|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | Top-bottom Misalignment | Left-right Misalignment | Front-rear Misalignment |
| <p>Top Blade</p> <p>Bottom Blade</p> | <p>Top Blade</p> <p>Bottom Blade</p> | <p>Top Blade</p> <p>Bottom Blade</p> | <p>Top Blade</p> <p>Bottom Blade</p> |



■ Others

1. Under Operation of Equipment

- 1-1. Do not touch a capacitor directly with bare hands during operation in order to avoid the danger of a electric shock.
- 1-2. Do not allow the terminals of a capacitor to come in contact with any conductive objects (short-circuit). Do not expose a capacitor to a conductive liquid, inducing any acid or alkali solutions.
- 1-3. Confirm the environment in which the equipment will operation is under the specified conditions. Do not use the equipment under the following environment.
 - (1) Being spattered with water or oil.
 - (2) Being exposed to direct sunlight.
 - (3) Being exposed to Ozone, ultraviolet rays or radiation.
 - (4) Being exposed to toxic gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas, etc.)
 - (5) Any vibrations or mechanical shocks exceeding the specified limits.
 - (6) Moisture condensing environments.
- 1-4. Use damp proof countermeasures if using under any conditions that can cause condensation.

2. Others

- 2-1. In an Emergency
 - (1) If the equipment should generate smoke, fire or smell, immediately turn off or unplug the equipment.

If the equipment is not turned off or unplugged, the hazards may be worsened by supplying continuous power.

- (2) In this type of situation, do not allow face and hands to come in contact with the capacitor or burns may be caused by the capacitors high temperature.

2-2. Disposal of Waste

When capacitors are disposed, they must be burned or buried by the industrial waste vender with the appropriate licenses.

2-3. Circuit Design

GRM, GCM, GMA/D, LLL/A/M, ERB, GQM, GJM, GNM Series capacitors in this catalog are not safety certified products.

2-4. Remarks

Failure to follow the cautions may result, worst case, in a short circuit and smoking when the product is used.

The above notices are for standard applications and conditions. Contact us when the products are used in special mounting conditions.

Select optimum conditions for operation as they determine the reliability of the product after assembly.

The data herein are given in typical values, not guaranteed ratings.

Notice

■ Rating

1. Operating Temperature

1. The operating temperature limit depends on the capacitor.

- 1-1. Do not apply temperatures exceeding the upper operating temperature.

It is necessary to select a capacitor with a suitable rated temperature which will cover the operating temperature range.

Also it is necessary to consider the temperature distribution in equipment and the seasonal temperature variable factor.

- 1-2. Consider the self-heating of the capacitor

The surface temperature of the capacitor shall be the upper operating temperature or less when including the self-heating factors.

2. Atmosphere Surroundings (gaseous and liquid)

1. Restriction on the operating environment of capacitors.

- 1-1. The capacitor, when used in the above, unsuitable, operating environments may deteriorate due to the corrosion of the terminations and the penetration of moisture into the capacitor.

- 1-2. The same phenomenon as the above may occur when the electrodes or terminals of the capacitor are subject to moisture condensation.

- 1-3. The deterioration of characteristics and insulation resistance due to the oxidization or corrosion of terminal electrodes may result in breakdown when the capacitor is exposed to corrosive or volatile gases or solvents for long periods of time.

3. Piezo-electric Phenomenon

1. When using high dielectric constant type capacitors in AC or pulse circuits, the capacitor itself vibrates at specific frequencies and noise may be generated. Moreover, when the mechanical vibration or shock is added to capacitor, noise may occur.

Notice

■ Soldering and Mounting

1. PCB Design

1. Notice for Pattern Forms

- 1-1. Unlike leaded components, chip components are susceptible to flexing stresses since they are mounted directly on the substrate. They are also more sensitive to mechanical and thermal stresses than leaded components. Excess solder fillet height can multiply these stresses and cause chip cracking. When designing substrates, take land patterns and dimensions into consideration to eliminate the possibility of excess solder fillet height.
- 1-2. It is possible for the chip to crack by the expansion and shrinkage of a metal board. Please contact us if you want to use our ceramic capacitors on a metal board such as Aluminum.

Pattern Forms

| | Prohibited | Correct |
|---|------------|---------|
| Placing Close to Chassis | | |
| Placing of Chip Components and Leaded Components | | |
| Placing of Leaded Components after Chip Component | | |
| Lateral Mounting | | |

Continued on the following page.

Notice

☒ Continued from the preceding page.

2. Land Dimensions

- 2-1. Chip capacitor can be cracked due to the stress of PCB bending / etc if the land area is larger than needed and has an excess amount of solder. Please refer to the land dimensions in table 1 for flow soldering, table 2 for reflow soldering, table 3 for GNM & LLA, and table 4 for LLM. Please confirm the suitable land dimension by evaluating of the actual SET / PCB.

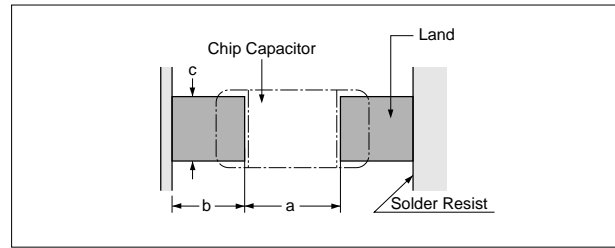


Table 1 Flow Soldering Method

| Part Number | Dimensions Chip (L×W) | a | b | c |
|------------------------------|--------------------------|------------|------------|------------|
| GRM18 QQM18 | 1.6×0.8 | 0.6 to 1.0 | 0.8 to 0.9 | 0.6 to 0.8 |
| GRM21 QQM21 | 2.0×1.25 | 1.0 to 1.2 | 0.9 to 1.0 | 0.8 to 1.1 |
| GRM31 | 3.2×1.6 | 2.2 to 2.6 | 1.0 to 1.1 | 1.0 to 1.4 |
| LLL21 | 1.25×2.0 | 0.4 to 0.7 | 0.5 to 0.7 | 1.4 to 1.8 |
| LLL31 | 1.6×3.2 | 0.6 to 1.0 | 0.8 to 0.9 | 2.6 to 2.8 |
| ERB11 | 1.25×1.0 | 0.4 to 0.6 | 0.6 to 0.8 | 0.8 to 1.0 |
| ERB21 | 2.0×1.25 | 1.0 to 1.2 | 0.9 to 1.0 | 0.8 to 1.0 |
| ERF1D | 1.4×1.4 | 0.5 to 0.8 | 0.8 to 0.9 | 1.0 to 1.2 |

(in mm)

Table 2 Reflow Soldering Method

| Part Number | Dimensions Chip (L×W) | a | b | c |
|------------------------------|--------------------------|-------------|--------------|-------------|
| GRM02 | 0.4×0.2 | 0.16 to 0.2 | 0.12 to 0.18 | 0.2 to 0.23 |
| GRM03 GJM03 | 0.6×0.3 | 0.2 to 0.3 | 0.2 to 0.35 | 0.2 to 0.4 |
| GRM15 GJM15 | 1.0×0.5 | 0.3 to 0.5 | 0.35 to 0.45 | 0.4 to 0.6 |
| GRM18 QQM18 | 1.6×0.8 | 0.6 to 0.8 | 0.6 to 0.7 | 0.6 to 0.8 |
| GRM21 QQM21 | 2.0×1.25 | 1.0 to 1.2 | 0.6 to 0.7 | 0.8 to 1.1 |
| GRM31 | 3.2×1.6 | 2.2 to 2.4 | 0.8 to 0.9 | 1.0 to 1.4 |
| GRM32 | 3.2×2.5 | 2.0 to 2.4 | 1.0 to 1.2 | 1.8 to 2.3 |
| GRM43 | 4.5×3.2 | 3.0 to 3.5 | 1.2 to 1.4 | 2.3 to 3.0 |
| GRM55 | 5.7×5.0 | 4.0 to 4.6 | 1.4 to 1.6 | 3.5 to 4.8 |
| LLL15 | 0.5×1.0 | 0.15 to 0.2 | 0.2 to 0.25 | 0.7 to 1.0 |
| LLL18 | 0.8×1.6 | 0.2 to 0.3 | 0.3 to 0.4 | 1.4 to 1.6 |
| LLL21 | 1.25×2.0 | 0.4 to 0.6 | 0.4 to 0.5 | 1.4 to 1.8 |
| LLL31 | 1.6×3.2 | 0.6 to 0.8 | 0.6 to 0.7 | 2.6 to 2.8 |
| ERB11 | 1.25×1.0 | 0.4 to 0.6 | 0.6 to 0.8 | 0.8 to 1.0 |
| ERB21 | 2.0×1.25 | 1.0 to 1.2 | 0.6 to 0.8 | 0.8 to 1.0 |
| ERB32 | 3.2×2.5 | 2.2 to 2.5 | 0.8 to 1.0 | 1.9 to 2.3 |
| ERF1D | 1.4×1.4 | 0.4 to 0.8 | 0.6 to 0.8 | 1.0 to 1.2 |
| ERF22 | 2.8×2.8 | 1.8 to 2.1 | 0.7 to 0.9 | 2.2 to 2.6 |

(in mm)

Continued on the following page. ☒

Notice

Continued from the preceding page.

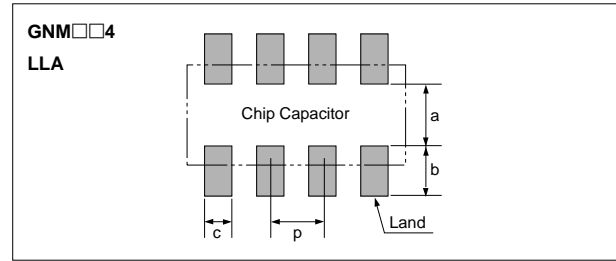
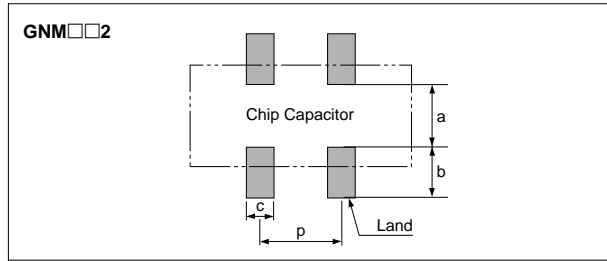


Table 3 GNM, LLA Series for Reflow Soldering Land Dimensions

| Part Number | Dimensions (mm) | | | | | |
|---------------|-----------------|------|---------------|---------------|--------------|------|
| | L | W | a | b | c | p |
| GNM0M2 | 0.9 | 0.6 | 0.12 to 0.20* | 0.35 to 0.40* | 0.3 | 0.45 |
| GNM1M2 | 1.37 | 1.0 | 0.4 to 0.5 | 0.35 to 0.45 | 0.3 to 0.35 | 0.64 |
| GNM212 | 2.0 | 1.25 | 0.6 to 0.7 | 0.5 to 0.7 | 0.4 to 0.5 | 1.0 |
| GNM214 | 2.0 | 1.25 | 0.6 to 0.7 | 0.5 to 0.7 | 0.25 to 0.35 | 0.5 |
| GNM314 | 3.2 | 1.6 | 0.8 to 1.0 | 0.7 to 0.9 | 0.3 to 0.4 | 0.8 |
| LLA18 | 1.6 | 0.8 | 0.3 to 0.4 | 0.25 to 0.35 | 0.15 to 0.25 | 0.4 |
| LLA21 | 2.0 | 1.25 | 0.5 to 0.7 | 0.35 to 0.6 | 0.2 to 0.3 | 0.5 |
| LLA31 | 3.2 | 1.6 | 0.7 to 0.9 | 0.4 to 0.7 | 0.3 to 0.4 | 0.8 |

* $0.82 \leq a+2b \leq 1.00$

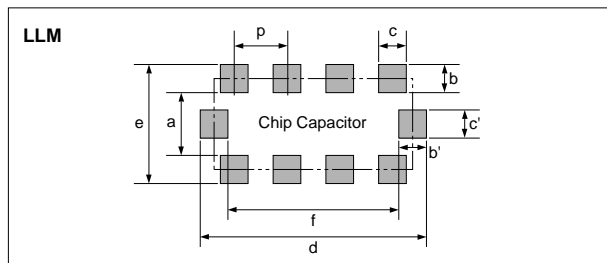



Table 4 LLM Series for Reflow Soldering Land Dimensions

| Part Number | Dimensions (mm) | | | | | | |
|--------------|-----------------|--------------|-------|------------|------------|------------|-----|
| | a | b, b' | c, c' | d | e | f | p |
| LLM21 | 0.6 to 0.8 | (0.3 to 0.5) | 0.3 | 2.0 to 2.6 | 1.3 to 1.8 | 1.4 to 1.6 | 0.5 |
| LLM31 | 1.0 | (0.3 to 0.5) | 0.4 | 3.2 to 3.6 | 1.6 to 2.0 | 2.6 | 0.8 |

$b=(c-e)/2, b'=(d-f)/2$

2. Adhesive Application

- Thin or insufficient adhesive can cause the chips to loosen or become disconnected during flow soldering. The amount of adhesive must be more than dimension c, shown in the drawing at right, to obtain the correct bonding strength. The chip's electrode thickness and land thickness must also be taken into consideration.
- Low viscosity adhesive can cause chips to slip after mounting. The adhesive must have a viscosity of 5000Pa · s (500ps) min. (at 25°C).

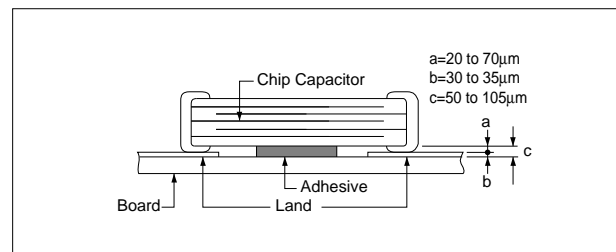

3. Adhesive Coverage

| Part Number | Adhesive Coverage* |
|----------------------------|--------------------|
| GRM18, GQM18 | 0.05mg min. |
| GRM21, LLL21, GQM21 | 0.1mg min. |
| GRM31, LLL31 | 0.15mg min. |

*Nominal Value

Continued on the following page.

Notice

☒ Continued from the preceding page.

3. Adhesive Curing

1. Insufficient curing of the adhesive can cause chips to disconnect during flow soldering and causes deterioration in the insulation resistance between the outer electrodes due to moisture absorption.
Control curing temperature and time in order to prevent insufficient hardening.

4. Flux Application

1. An excessive amount of flux generates a large quantity of flux gas, which can cause a deterioration of Solderability. So apply flux thinly and evenly throughout. (A foaming system is generally used for flow soldering).
2. Flux containing too a high percentage of halide may cause corrosion of the outer electrodes unless there is sufficient cleaning. Use flux with a halide content of 0.2% max.

3. Do not use strong acidic flux.


4. Do not use water-soluble flux.

(*Water-soluble flux can be defined as non rosin type flux including wash-type flux and non-wash-type flux.)


5. Flow Soldering

- Set temperature and time to ensure that leaching of the outer electrode does not exceed 25% of the chip end area as a single chip (full length of the edge A-B-C-D shown right) and 25% of the length A-B shown below as mounted on substrate.

[As a Single Chip]



[As Mounted on Substrate]



6. Washing

1. Please evaluate a capacitor by actual cleaning equipment and condition surely for confirming the quality and select the applicable solvent.
2. Unsuitable cleaning solvent may leave residual flux, other foreign substances, causing deterioration of electrical characteristics and the reliability of the capacitors.

3. Select the proper cleaning conditions.

3-1. Improper cleaning conditions (excessive or insufficient) may result in the deterioration of the performance of the capacitors.

Continued on the following page. ☒

Notice

☒ Continued from the preceding page.

7. Coating

1. A crack may be caused in the capacitor due to the stress of the thermal contraction of the resin during curing process.

The stress is affected by the amount of resin and curing contraction.

Select a resin with small curing contraction.

The difference in the thermal expansion coefficient between a coating resin or a molding resin and capacitor may cause the destruction and deterioration of the capacitor such as a crack or peeling, and lead to the deterioration of insulation resistance or dielectric breakdown.

Select a resin for which the thermal expansion coefficient is as close to that of capacitor as possible.

A silicone resin can be used as an under-coating to buffer against the stress.

2. Select a resin that is less hygroscopic.

Using hygroscopic resins under high humidity conditions may cause the deterioration of the insulation resistance of a capacitor.

An epoxy resin can be used as a less hygroscopic resin.

8. Die Bonding/Wire Bonding (GMA or GMD Series)

1. Die Bonding of Capacitors

- Use the following materials for the Brazing alloys:
Au-Sn (80/20) 300 to 320 degree C in N₂ atmosphere
- Mounting
 - (1) Control the temperature of the substrate so it matches the temperature of the brazing alloy.
 - (2) Place the brazing alloy on the substrate and place the capacitor on the alloy. Hold the capacitor and gently apply the load. Be sure to complete the operation within 1 minute.

2. Wire Bonding

- Wire
Gold wire: 25 micro m (0.001 inch) diameter
- Bonding
 - (1) Thermo compression, ultrasonic ball bonding.
 - (2) Required stage temperature: 150 to 200 degree C
 - (3) Required wedge or capillary weight: 0.2N to 0.5N
 - (4) Bond the capacitor and base substrate or other devices with gold wire.

Notice

■ Others

1. Transportation

1. The performance of a capacitor may be affected by the conditions during transportation.

1-1. The capacitors shall be protected against excessive temperature, humidity and mechanical force during transportation.

(1) Climatic condition

- low air temperature: -40°C
- change of temperature air/air: $-25^{\circ}\text{C}/+25^{\circ}\text{C}$
- low air pressure: 30 kPa
- change of air pressure: 6 kPa/min.

(2) Mechanical condition

Transportation shall be done in such a way that the boxes are not deformed and forces are not directly passed on to the inner packaging.

1-2. Do not apply excessive vibration, shock, and pressure to the capacitor.

- (1) When excessive mechanical shock or pressure is applied to a capacitor, chipping or cracking may occur in the ceramic body of the capacitor.
- (2) When a sharp edge of an air driver, a soldering iron, tweezers, a chassis, etc. impacts strongly on the surface of capacitor, the capacitor may crack and short-circuit.

1-3. Do not use a capacitor to which excessive shock was applied by dropping, etc.

The capacitor dropped accidentally during processing may be damaged.

Reference Data

1. Solderability

(1) Test Method

Subject the chip capacitor to the following conditions.
 Then apply flux (an ethanol solution of 25% rosin) to the chip and dip it in 230°C eutectic solder for 2 seconds.
 Conditions:
 Expose prepared at room temperature (for 6 months and 12 months, respectively)
 Prepared at high temperature (for 100 hours at 85°C)
 Prepared left at high humidity (for 100 hours under 90%RH to 95%RH at 40°C)

(2) Test Samples

GRM21 : Products for flow/reflow soldering.

(3) Acceptance Criteria

With a 60-power optical microscope, measure the surface area of the outer electrode that is covered with solder.

(4) Results

Refer to Table 1.


Table 1

| Sample | Initial State | Prepared at Room Temperature | | Prepared at High Temperature for 100 Hours at 85°C | Prepared at High Humidity for 100 Hours at 90 to 95% RH and 40°C |
|---------------------------------|---------------|------------------------------|-----------|--|--|
| | | 6 months | 12 months | | |
| GRM21 for flow/reflow soldering | 95 to 100% | 95 to 100% | 95% | 90 to 95% | 95% |

2. Board Bending Strength for Solder Fillet Height

(1) Test Method

Solder the chip capacitor to the test PCB with the amount of solder paste necessary to achieve the fillet heights.
 Then bend the PCB using the method illustrated and measure capacitance.

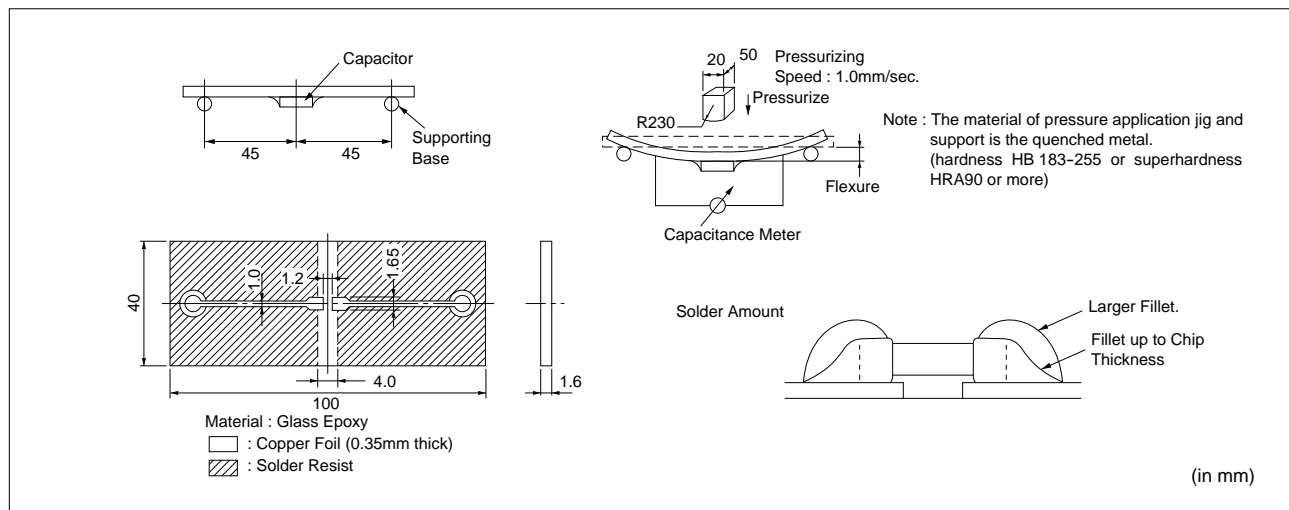

(2) Test Samples

GRM21: 5C/R7/F5 Characteristics T=0.6mm

(3) Acceptance Criteria

Products should be determined to be defective if the change in capacitance has exceeded the values specified in Table 2.

Table 2


| Characteristics | Change in Capacitance |
|-----------------|---|
| 5C | Within $\pm 5\%$ or $\pm 0.5\text{pF}$, whichever is greater |
| R7 | Within $\pm 12.5\%$ |
| F5 | Within $\pm 20\%$ |

Continued on the following page.

Reference Data

Continued from the preceding page.

(4) Results

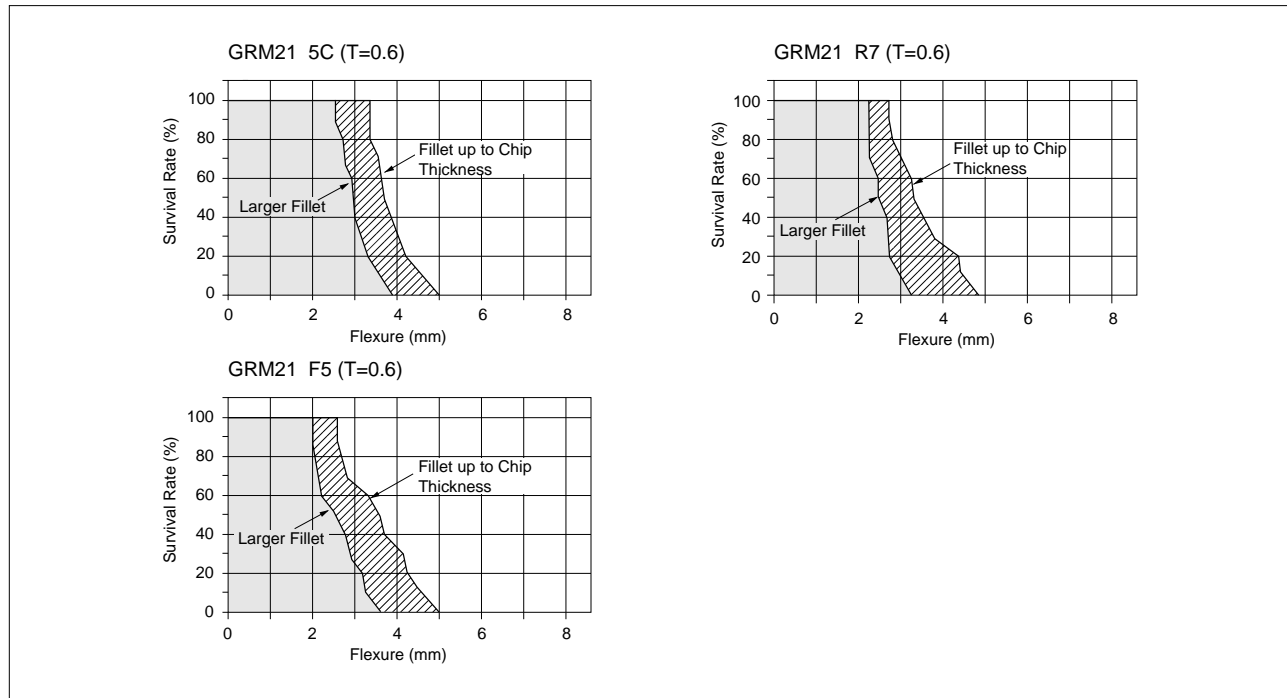


3. Temperature Cycling for Solder Fillet Height

(1) Test Method

Solder the chips to the substrate of various test fixtures using sufficient amounts of solder to achieve the required fillet height. Then subject the fixtures to the cycle illustrated below 200 times.

[Temperature Cycling]

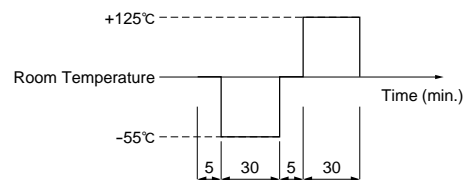

① Solder Amount

Alumina substrates are typically designed for reflow soldering.

Glass epoxy or paper phenol substrates are typically used for flow soldering.

② Material

Alumina (Thickness: 0.64mm)

Glass epoxy (Thickness: 1.64mm)


Paper phenol (Thickness: 1.64mm)

[Solder Amount]

| Substrate | | Alumina | Glass Epoxy or Paper Phenol |
|-------------------|---|---------------------|-----------------------------|
| Solder Amount | ① | 0.5T | T |
| | ② | 0.7T | 1.3T |
| | ③ | T | 1.6T |
| Solder to be used | | 6X4 Eutectic solder | |

③ Land Dimension

[Land Dimension]

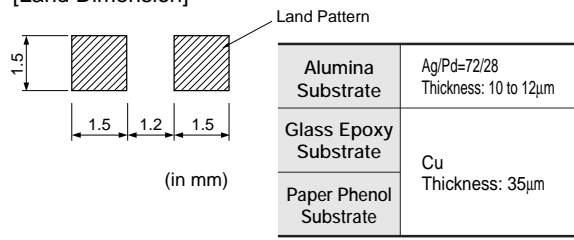

Continued on the following page. ↗

Reference Data

Continued from the preceding page.

(2) Test Samples

GRM21 5C/R7/F5 Characteristics T=0.6mm


(3) Acceptance Criteria

Products are determined to be defective if the change in capacitance has exceeded the values specified in Table 3.

Table 3

| Characteristics | Change in Capacitance |
|-----------------|--|
| 5C | Within $\pm 2.5\%$ or $\pm 0.25\text{pF}$, whichever is greater |
| R7 | Within $\pm 7.5\%$ |
| F5 | Within $\pm 20\%$ |

(4) Results

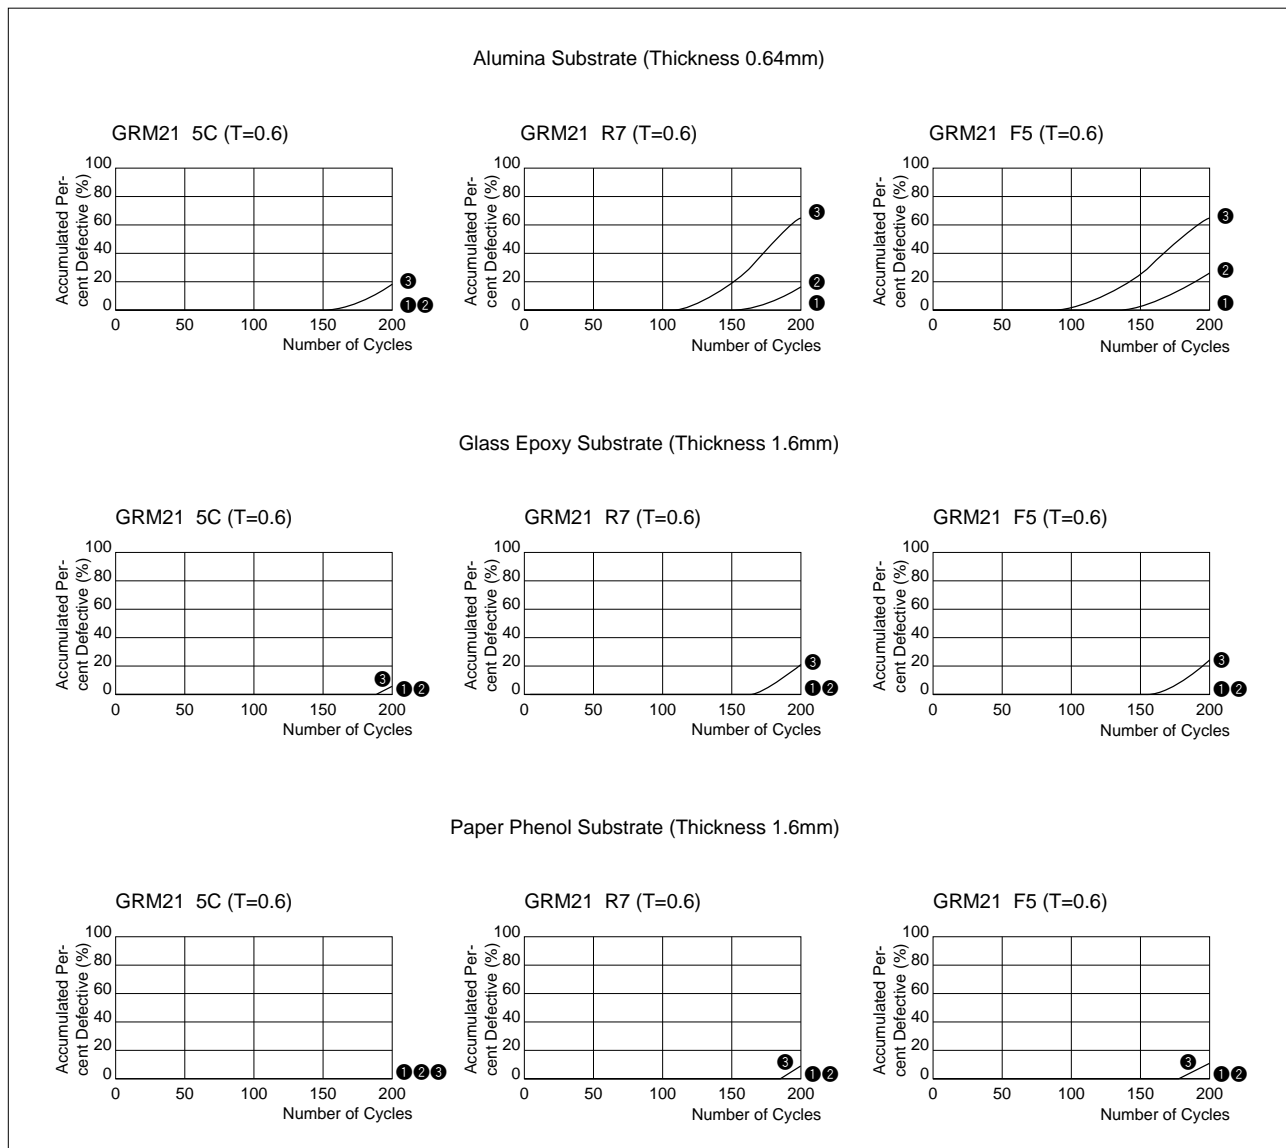

Continued on the following page. ↗


Reference Data

Continued from the preceding page.

4. Board Bending Strength for Board Material

(1) Test Method

Solder the chip to the test board. Then bend the board using the method illustrated below, to measure capacitance.

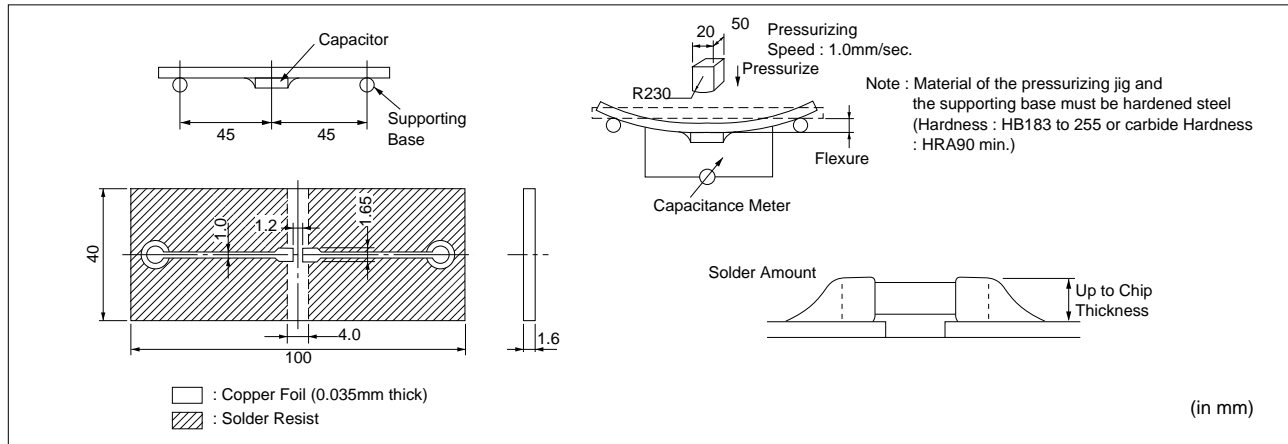

(2) Test Samples

GRM21 5C/R7/F5 Characteristics T=0.6mm typical


(3) Acceptance Criteria

Products should be determined to be defective if the change in capacitance has exceeded the values specified in Table 4.

Table 4

| Characteristics | Change in Capacitance |
|-----------------|---|
| 5C | Within $\pm 5\%$ or $\pm 0.5\text{pF}$, whichever is greater |
| R7 | Within $\pm 12.5\%$ |
| F5 | Within $\pm 20\%$ |

(4) Results

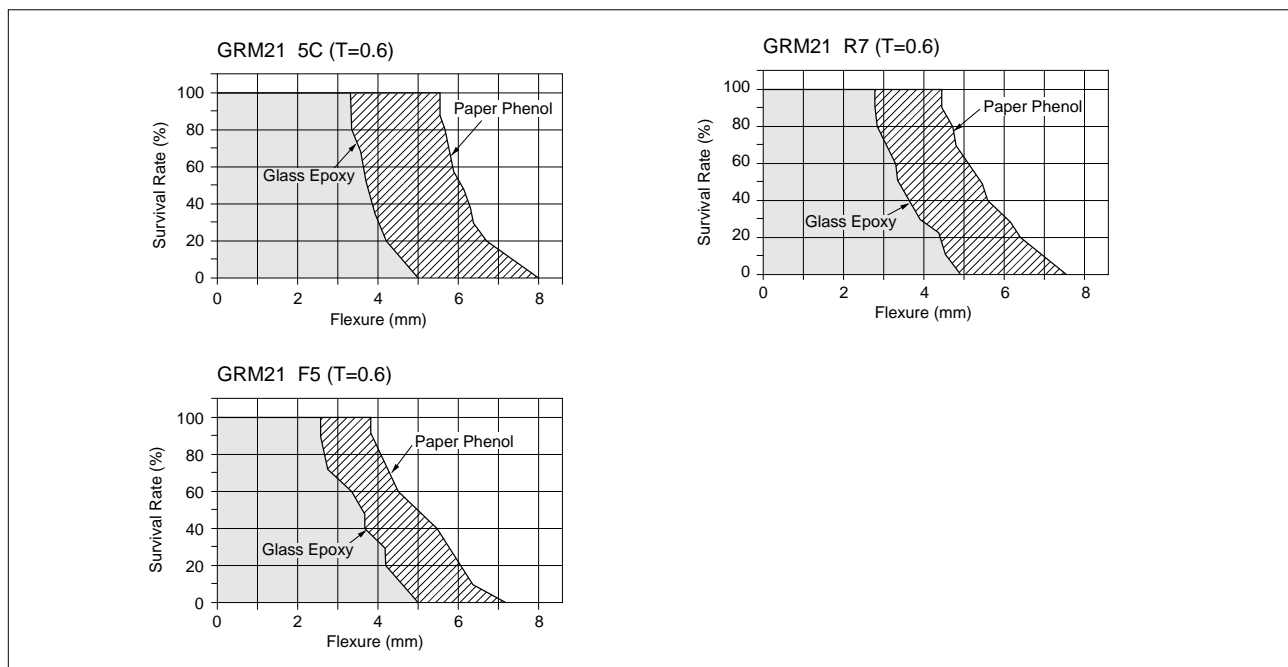

Continued on the following page. ↗


Reference Data

Continued from the preceding page.

5. Break Strength

(1) Test Method

Place the chip on a steel plate as illustrated on the right. Increase load applied to a point near the center of the test sample.

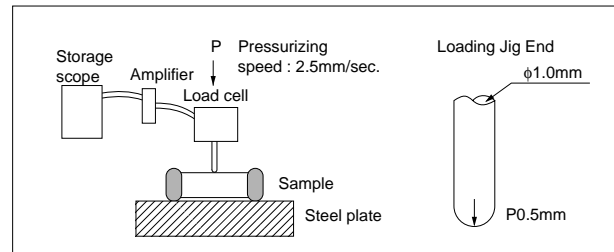

(2) Test Samples

GRM21 5C/R7/F5 Characteristics
 GRM31 5C/R7/F5 Characteristics

(3) Acceptance Criteria

Define the load that has caused the chip to break or crack, as the bending force.

(4) Explanation

Break strength, P, is proportionate to the square of the thickness of the ceramic element and is expressed as a curve of secondary degree.

The formula is:

$$P = \frac{2\gamma WT^2}{3L} \quad (\text{N})$$

W : Width of ceramic element (mm)

T : Thickness of element (mm)


L : Distance between fulcrums (mm)

γ : Bending stress (N/mm²)

| Chip Size | L | W | γ | | |
|-----------|-----|-----|--------------------|--------------------|--------------------|
| | | | 5C Characteristics | R7 Characteristics | F5 Characteristics |
| GRM21 | 1.5 | 1.2 | 300 | 180 | 160 |
| GRM31 | 2.7 | 1.5 | | | |

(in mm)


(5) Results

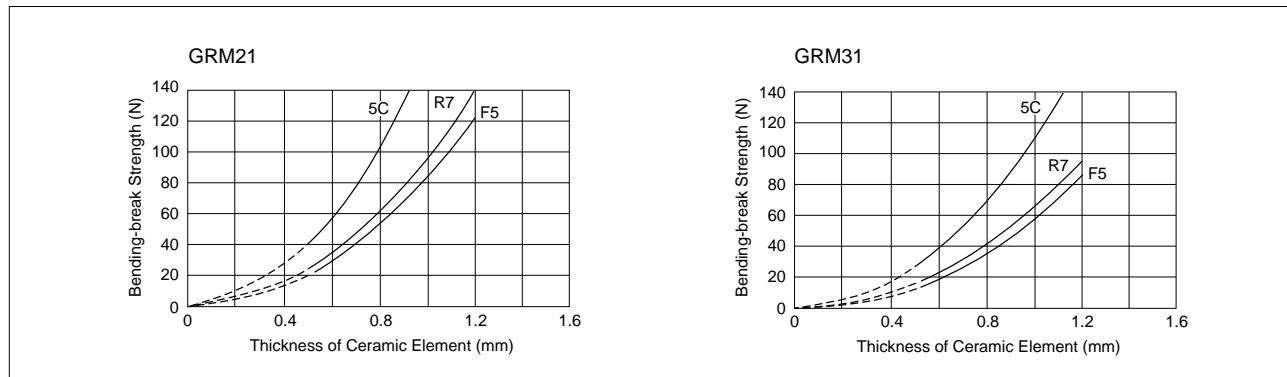

6. Thermal Shock

(1) Test method

After applying flux (an ethanol solution of 25% rosin), dip the chip in a solder bath (6X4 eutectic solder) in accordance with the following conditions:

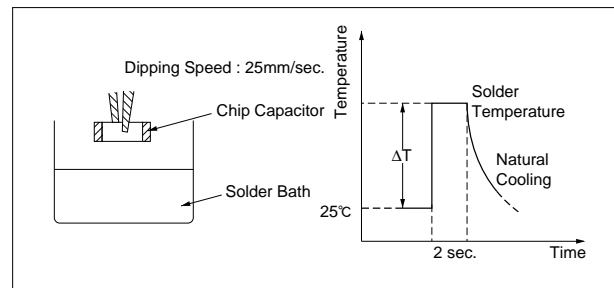

(2) Test samples

GRM21 5C/R7/F5 Characteristics T=0.6mm typical

(3) Acceptance criteria


Visually inspect the test sample with a 60-power optical microscope. Chips exhibiting breaks or cracks should be determined to be defective.

Continued on the following page. ↗

Reference Data

☒ Continued from the preceding page.

(4) Results

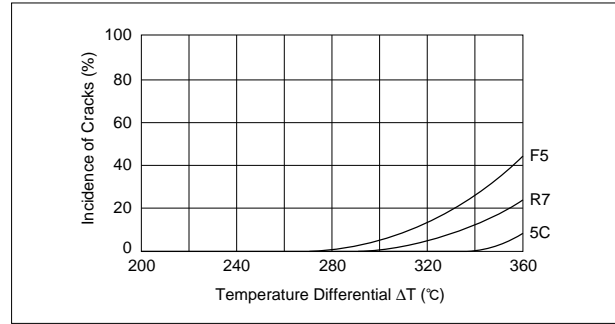

7. Solder Heat Resistance

(1) Test Method

① Reflow soldering:

Apply about 300 μm of solder paste over the alumina substrate. After reflow soldering, remove the chip and check for leaching that may have occurred on the outer electrode.

② Flow soldering:

After dipping the test sample with a pair of tweezers in wave solder (eutectic solder), check for leaching that may have occurred on the outer electrode.

③ Dip soldering:

After dipping the test sample with a pair of tweezers in static solder (eutectic solder), check for leaching that may have occurred on the outer electrode.


④ Flux to be used: An ethanol solution of 25% rosin.

(2) Test samples


GRM21: For flow/reflow soldering T=0.6mm

(3) Acceptance criteria

The starting time of leaching should be defined as the time when the outer electrode has lost 25% of the total edge length of A-B-C-D as illustrated:

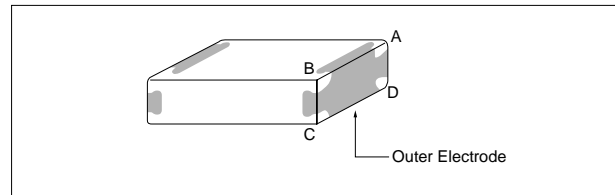

(4) Results

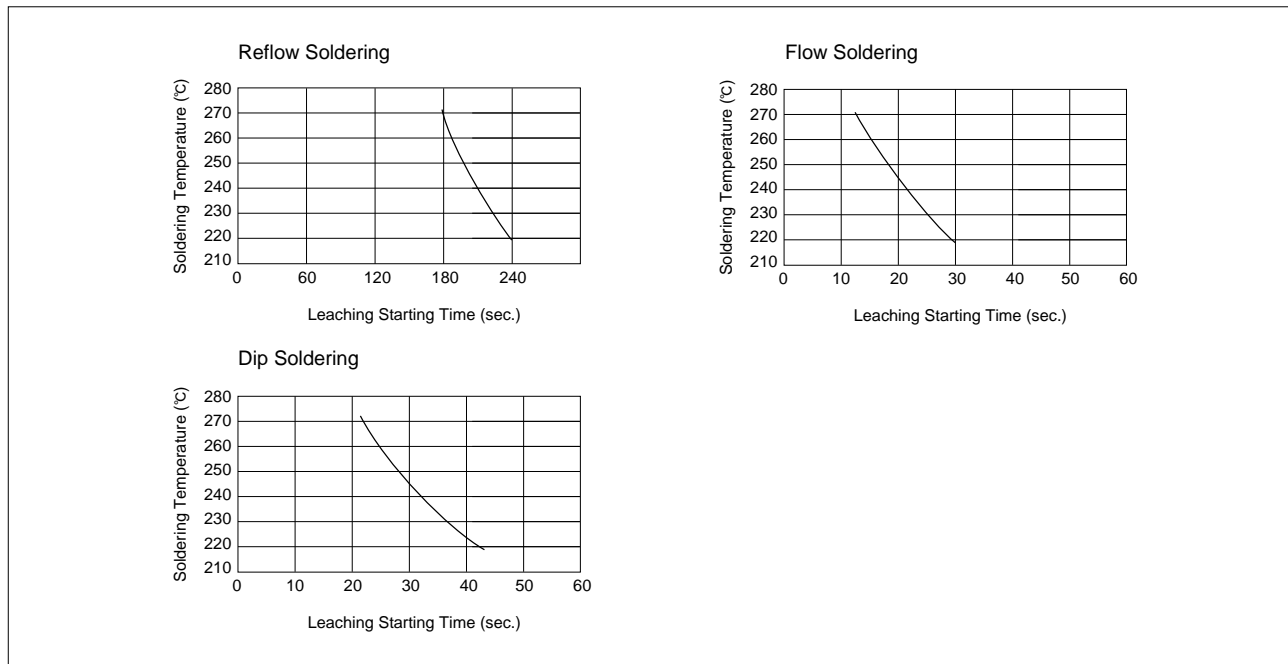

Continued on the following page. ☒


Reference Data

☒ Continued from the preceding page.

8. Thermal Shock when Making Corrections with a Soldering Iron

(1) Test Method

Apply a soldering iron meeting the conditions below to the soldered joint of a chip that has been soldered to a paper phenol board, while supplying wire solder. (Note: the soldering iron tip should not directly touch the ceramic element of the chip.)

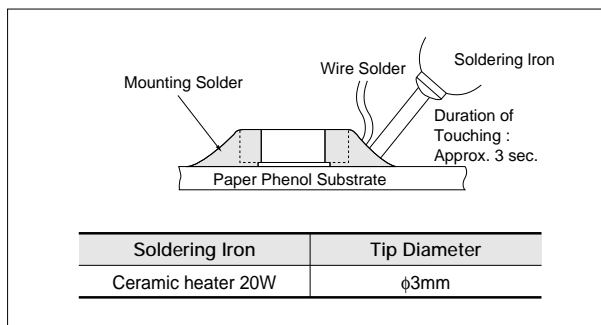


(2) Test Samples

GRM21 5C/R7/F5 Characteristics T=0.6mm

(3) Acceptance Criteria for Defects

Observe the appearance of the test sample with a 60-power optical microscope. Those units displaying any breaks or cracks are determined to be defective.

(4) Results

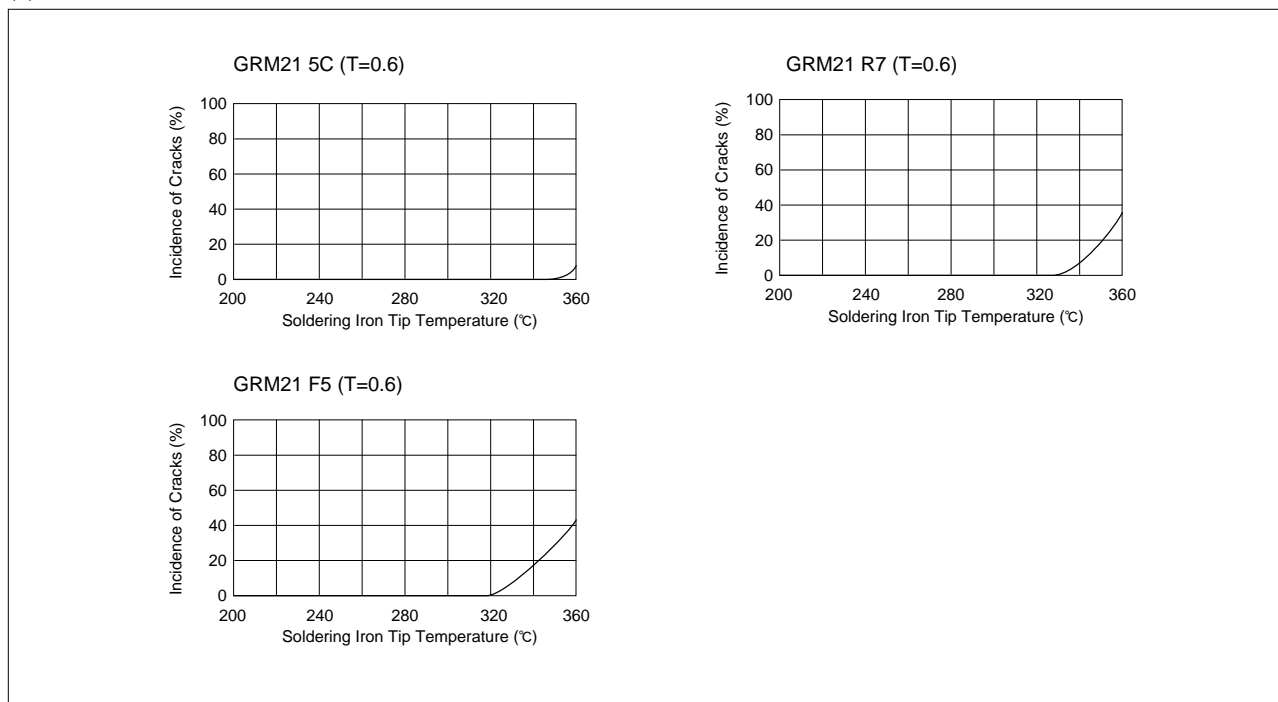


Chip Monolithic Ceramic Capacitors



Medium Voltage Low Dissipation Factor

■ Features

1. Low-loss and suitable for high frequency circuits
2. Murata's original internal electrode structure realizes high flash-over voltage.
3. A new monolithic structure for small, surface-mountable devices capable of operating at high voltage levels
4. Sn-plated external electrodes realize good solderability.
5. Use the GRM21/31 type with flow or reflow soldering, and other types with reflow soldering only.

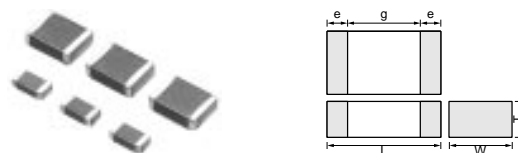

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|-----------|---------------|--------|--------|
| | L | W | T | e min. | g min. |
| GRM21A | 2.0 ±0.2 | 1.25 ±0.2 | 1.0 +0, -0.3 | 0.3 | 0.7 |
| GRM31A | 3.2 ±0.2 | 1.6 ±0.2 | 1.25 +0, -0.3 | | 1.5* |
| GRM31B | | | 1.0 +0, -0.3 | | |
| GRM32A | 3.2 ±0.2 | 2.5 ±0.2 | 1.25 +0, -0.3 | | |
| GRM32B | | | 1.0 +0, -0.3 | | |
| GRM42A | 4.5 ±0.3 | 2.0 ±0.2 | 1.0 +0, -0.3 | | |

* GRM31A7U3D, GRM32A7U3D, GRM32B7U3D : 1.8mm min.

■ Applications

Ideal for use on high frequency pulse circuits such as snubber circuits for switching power supplies, DC-DC converters, ballasts (inverter fluorescent lamps), etc.

9

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

*: In case of use C0G char., DC630V product with pulse voltage, be sure not to use with 10kHz and less pulse or ripple voltage condition. and these product are not suitable for commercial power line voltage application, such as AC filter. For those applications, be sure to use AC voltage rating product.(GA2/GA3 series)

C0G Characteristics

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM31A5C2J101JW01D | DC630 | C0G (EIA) | 100 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J121JW01D | DC630 | C0G (EIA) | 120 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J151JW01D | DC630 | C0G (EIA) | 150 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J181JW01D | DC630 | C0G (EIA) | 180 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J221JW01D | DC630 | C0G (EIA) | 220 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J271JW01D | DC630 | C0G (EIA) | 270 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J331JW01D | DC630 | C0G (EIA) | 330 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J391JW01D | DC630 | C0G (EIA) | 390 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J471JW01D | DC630 | C0G (EIA) | 470 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A5C2J561JW01D | DC630 | C0G (EIA) | 560 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31B5C2J681JW01L | DC630 | C0G (EIA) | 680 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31B5C2J821JW01L | DC630 | C0G (EIA) | 820 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31B5C2J102JW01L | DC630 | C0G (EIA) | 1000 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |

U2J Characteristics



| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM21A7U2E101JW31D | DC250 | U2J (EIA) | 100 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E121JW31D | DC250 | U2J (EIA) | 120 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E151JW31D | DC250 | U2J (EIA) | 150 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E181JW31D | DC250 | U2J (EIA) | 180 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E221JW31D | DC250 | U2J (EIA) | 220 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E271JW31D | DC250 | U2J (EIA) | 270 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E331JW31D | DC250 | U2J (EIA) | 330 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E391JW31D | DC250 | U2J (EIA) | 390 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E471JW31D | DC250 | U2J (EIA) | 470 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E561JW31D | DC250 | U2J (EIA) | 560 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E681JW31D | DC250 | U2J (EIA) | 680 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E821JW31D | DC250 | U2J (EIA) | 820 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E102JW31D | DC250 | U2J (EIA) | 1000 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E122JW31D | DC250 | U2J (EIA) | 1200 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E152JW31D | DC250 | U2J (EIA) | 1500 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E182JW31D | DC250 | U2J (EIA) | 1800 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21A7U2E222JW31D | DC250 | U2J (EIA) | 2200 ±5% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM31A7U2E272JW31D | DC250 | U2J (EIA) | 2700 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2E332JW31D | DC250 | U2J (EIA) | 3300 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2E392JW31D | DC250 | U2J (EIA) | 3900 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2E472JW31D | DC250 | U2J (EIA) | 4700 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2E562JW31D | DC250 | U2J (EIA) | 5600 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31B7U2E682JW31L | DC250 | U2J (EIA) | 6800 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31B7U2E822JW31L | DC250 | U2J (EIA) | 8200 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31B7U2E103JW31L | DC250 | U2J (EIA) | 10000 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31A7U2J100JW31D | DC630 | U2J (EIA) | 10 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J120JW31D | DC630 | U2J (EIA) | 12 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J150JW31D | DC630 | U2J (EIA) | 15 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J180JW31D | DC630 | U2J (EIA) | 18 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J220JW31D | DC630 | U2J (EIA) | 22 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J270JW31D | DC630 | U2J (EIA) | 27 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J330JW31D | DC630 | U2J (EIA) | 33 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J390JW31D | DC630 | U2J (EIA) | 39 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J470JW31D | DC630 | U2J (EIA) | 47 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J560JW31D | DC630 | U2J (EIA) | 56 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J680JW31D | DC630 | U2J (EIA) | 68 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J820JW31D | DC630 | U2J (EIA) | 82 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J101JW31D | DC630 | U2J (EIA) | 100 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J121JW31D | DC630 | U2J (EIA) | 120 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J151JW31D | DC630 | U2J (EIA) | 150 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J181JW31D | DC630 | U2J (EIA) | 180 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J221JW31D | DC630 | U2J (EIA) | 220 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J271JW31D | DC630 | U2J (EIA) | 270 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J331JW31D | DC630 | U2J (EIA) | 330 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J391JW31D | DC630 | U2J (EIA) | 390 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J471JW31D | DC630 | U2J (EIA) | 470 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J561JW31D | DC630 | U2J (EIA) | 560 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J681JW31D | DC630 | U2J (EIA) | 680 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J821JW31D | DC630 | U2J (EIA) | 820 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U2J102JW31D | DC630 | U2J (EIA) | 1000 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM32A7U2J122JW31D | DC630 | U2J (EIA) | 1200 ±5% | 3.2 | 2.5 | 1.0 | 1.5 | 0.3 min. |
| GRM32A7U2J152JW31D | DC630 | U2J (EIA) | 1500 ±5% | 3.2 | 2.5 | 1.0 | 1.5 | 0.3 min. |
| GRM32A7U2J182JW31D | DC630 | U2J (EIA) | 1800 ±5% | 3.2 | 2.5 | 1.0 | 1.5 | 0.3 min. |
| GRM32A7U2J222JW31D | DC630 | U2J (EIA) | 2200 ±5% | 3.2 | 2.5 | 1.0 | 1.5 | 0.3 min. |

Continued on the following page. 

Continued from the preceding page.

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM31A7U3A100JW31D | DC1000 | U2J (EIA) | 10 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A120JW31D | DC1000 | U2J (EIA) | 12 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A150JW31D | DC1000 | U2J (EIA) | 15 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A180JW31D | DC1000 | U2J (EIA) | 18 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A220JW31D | DC1000 | U2J (EIA) | 22 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A270JW31D | DC1000 | U2J (EIA) | 27 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A330JW31D | DC1000 | U2J (EIA) | 33 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A390JW31D | DC1000 | U2J (EIA) | 39 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A470JW31D | DC1000 | U2J (EIA) | 47 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A560JW31D | DC1000 | U2J (EIA) | 56 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A680JW31D | DC1000 | U2J (EIA) | 68 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A820JW31D | DC1000 | U2J (EIA) | 82 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A101JW31D | DC1000 | U2J (EIA) | 100 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A121JW31D | DC1000 | U2J (EIA) | 120 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A151JW31D | DC1000 | U2J (EIA) | 150 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A181JW31D | DC1000 | U2J (EIA) | 180 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A221JW31D | DC1000 | U2J (EIA) | 220 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A271JW31D | DC1000 | U2J (EIA) | 270 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31A7U3A331JW31D | DC1000 | U2J (EIA) | 330 ±5% | 3.2 | 1.6 | 1.0 | 1.5 | 0.3 min. |
| GRM31B7U3A391JW31L | DC1000 | U2J (EIA) | 390 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31B7U3A471JW31L | DC1000 | U2J (EIA) | 470 ±5% | 3.2 | 1.6 | 1.25 | 1.5 | 0.3 min. |
| GRM31A7U3D100JW31D | DC2000 | U2J (EIA) | 10 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D120JW31D | DC2000 | U2J (EIA) | 12 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D150JW31D | DC2000 | U2J (EIA) | 15 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D180JW31D | DC2000 | U2J (EIA) | 18 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D220JW31D | DC2000 | U2J (EIA) | 22 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D270JW31D | DC2000 | U2J (EIA) | 27 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D330JW31D | DC2000 | U2J (EIA) | 33 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D390JW31D | DC2000 | U2J (EIA) | 39 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D470JW31D | DC2000 | U2J (EIA) | 47 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D560JW31D | DC2000 | U2J (EIA) | 56 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM31A7U3D680JW31D | DC2000 | U2J (EIA) | 68 ±5% | 3.2 | 1.6 | 1.0 | 1.8 | 0.3 min. |
| GRM32A7U3D820JW31D | DC2000 | U2J (EIA) | 82 ±5% | 3.2 | 2.5 | 1.0 | 1.8 | 0.3 min. |
| GRM32A7U3D101JW31D | DC2000 | U2J (EIA) | 100 ±5% | 3.2 | 2.5 | 1.0 | 1.8 | 0.3 min. |
| GRM32A7U3D121JW31D | DC2000 | U2J (EIA) | 120 ±5% | 3.2 | 2.5 | 1.0 | 1.8 | 0.3 min. |
| GRM32A7U3D151JW31D | DC2000 | U2J (EIA) | 150 ±5% | 3.2 | 2.5 | 1.0 | 1.8 | 0.3 min. |
| GRM32B7U3D181JW31L | DC2000 | U2J (EIA) | 180 ±5% | 3.2 | 2.5 | 1.25 | 1.8 | 0.3 min. |
| GRM32B7U3D221JW31L | DC2000 | U2J (EIA) | 220 ±5% | 3.2 | 2.5 | 1.25 | 1.8 | 0.3 min. |
| GRM42A7U3F270JW31L | DC3150 | U2J (EIA) | 27 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F330JW31L | DC3150 | U2J (EIA) | 33 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F390JW31L | DC3150 | U2J (EIA) | 39 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F470JW31L | DC3150 | U2J (EIA) | 47 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F560JW31L | DC3150 | U2J (EIA) | 56 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F680JW31L | DC3150 | U2J (EIA) | 68 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F820JW31L | DC3150 | U2J (EIA) | 82 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A7U3F101JW31L | DC3150 | U2J (EIA) | 100 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |




Specifications and Test Methods
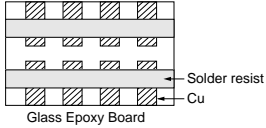
| No. | Item | Specifications | Test Method | | | | | | | | | | | | |
|---------------|---|--|--|---------------|------------------|---------|---------------------------|----------|---------------------------|--------------|---------------------------|------------------|------------------------|---|------|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | <p>No failure should be observed when voltage in Table is applied between the terminations for 1 to 5 sec., provided the charge/discharge current is less than 50mA.</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Test Voltage</th> </tr> </thead> <tbody> <tr> <td>DC250V</td> <td>200% of the rated voltage</td> </tr> <tr> <td>DC630V</td> <td>150% of the rated voltage</td> </tr> <tr> <td>DC1kV, DC2kV</td> <td>120% of the rated voltage</td> </tr> <tr> <td>DC3.15kV</td> <td>DC4095V</td> </tr> </tbody> </table> | Rated Voltage | Test Voltage | DC250V | 200% of the rated voltage | DC630V | 150% of the rated voltage | DC1kV, DC2kV | 120% of the rated voltage | DC3.15kV | DC4095V | | |
| Rated Voltage | Test Voltage | | | | | | | | | | | | | | |
| DC250V | 200% of the rated voltage | | | | | | | | | | | | | | |
| DC630V | 150% of the rated voltage | | | | | | | | | | | | | | |
| DC1kV, DC2kV | 120% of the rated voltage | | | | | | | | | | | | | | |
| DC3.15kV | DC4095V | | | | | | | | | | | | | | |
| 5 | Insulation Resistance (I.R.) | More than 10,000MΩ | The insulation resistance should be measured with DC500±50V (DC250±25V in case of rated voltage: DC250V) and within 60±5 sec. of charging. | | | | | | | | | | | | |
| 6 | Capacitance | Within the specified tolerance | The capacitance/Q should be measured at the frequency and voltage shown as follows. | | | | | | | | | | | | |
| 7 | Q | 1,000 min. | <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>C<1,000pF</td> <td>1±0.2MHz</td> <td>AC0.5 to 5V(r.m.s.)</td> </tr> <tr> <td>C≥1,000pF</td> <td>1±0.2kHz</td> <td>AC1±0.2V(r.m.s.)</td> </tr> </tbody> </table> | Capacitance | Frequency | Voltage | C<1,000pF | 1±0.2MHz | AC0.5 to 5V(r.m.s.) | C≥1,000pF | 1±0.2kHz | AC1±0.2V(r.m.s.) | | | |
| Capacitance | Frequency | Voltage | | | | | | | | | | | | | |
| C<1,000pF | 1±0.2MHz | AC0.5 to 5V(r.m.s.) | | | | | | | | | | | | | |
| C≥1,000pF | 1±0.2kHz | AC1±0.2V(r.m.s.) | | | | | | | | | | | | | |
| 8 | Capacitance Temperature Characteristics | Temp. Coefficient C0G char. : 0±30ppm/°C (Temp. Range : +25 to +125°C) 0+30, -72ppm/°C (Temp. Range : -55 to +25°C) U2J char. : -750±120ppm/°C (Temp. Range : +25 to +125°C) -750+120, -347ppm/°C (Temp. Range : -55 to +25°C) | The capacitance measurement should be made at each step specified in Table. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>Min. Operating Temp.±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>Max. Operating Temp.±2</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 | Max. Operating Temp.±2 | 5 | 25±2 |
| Step | Temperature (°C) | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | |
| 9 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. <div style="text-align: center;">  <p>10N, 10±1s Glass Epoxy Board</p> </div> <p>Fig. 1</p> | | | | | | | | | | | | |
| 10 | Appearance | No defects or abnormalities | Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.). <div style="text-align: center;">  <p>Solder resist Cu Glass Epoxy Board</p> </div> | | | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | | |
| | Q | 1,000 min. | | | | | | | | | | | | | |

Continued on the following page.

Specifications and Test Methods

Continued from the preceding page.
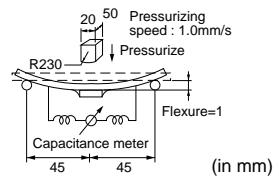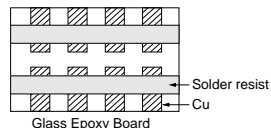
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------|------------------------------|--|--|---|------------------|-------------|---------------------------|--------------------------------|---------------------------|---|--------------|----------|-----|------------------------|------|-----|------------|--------|-----|-----|---------|-----|-----|-----|---------|
| 11 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | |
| | |  <table border="1" data-bbox="414 472 889 609"> <thead> <tr> <th rowspan="2">L×W (mm)</th> <th colspan="3">Dimension (mm)</th> <th rowspan="2">d</th> </tr> <tr> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>2.0×1.25</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> <td rowspan="4">1.0</td> </tr> <tr> <td>3.2×1.6</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>3.2×2.5</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>4.5×2.0</td> <td>3.5</td> <td>7.0</td> <td>2.4</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> | | L×W (mm) | Dimension (mm) | | | d | a | b | c | 2.0×1.25 | 1.2 | 4.0 | 1.65 | 1.0 | 3.2×1.6 | 2.2 | 5.0 | 2.0 | 3.2×2.5 | 2.2 | 5.0 | 2.9 | 4.5×2.0 |
| L×W (mm) | Dimension (mm) | | | | d | | | | | | | | | | | | | | | | | | | | |
| | a | b | c | | | | | | | | | | | | | | | | | | | | | | |
| 2.0×1.25 | 1.2 | 4.0 | 1.65 | 1.0 | | | | | | | | | | | | | | | | | | | | | |
| 3.2×1.6 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | |
| 3.2×2.5 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | |
| 4.5×2.0 | 3.5 | 7.0 | 2.4 | | | | | | | | | | | | | | | | | | | | | | |
| | | |  <p style="text-align: center;">Fig. 3</p> | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | No marking defects | Preheat the capacitor at 120 to 150°C* for 1 min. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition* for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s *Preheating for more than 3.2×2.5mm | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±2.5% | | | | | | | | | | | | | | | | | | | | | | |
| | | Q | 1,000 min. | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 10,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1" data-bbox="941 955 1421 1029"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>100 to 120°C</td> <td>1 min.</td> </tr> <tr> <td>2</td> <td>170 to 200°C</td> <td>1 min.</td> </tr> </tbody> </table> | Step | Temperature | Time | 1 | 100 to 120°C | 1 min. | 2 | 170 to 200°C | 1 min. | | | | | | | | | | | | | |
| Step | Temperature | Time | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 100 to 120°C | 1 min. | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 170 to 200°C | 1 min. | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Temperature Cycle | Appearance | No marking defects | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±2.5% | | | | | | | | | | | | | | | | | | | | | | |
| | | Q | 500 min. | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 10,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1" data-bbox="941 1165 1421 1281"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Operating Temp.±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> <tr> <td>3</td> <td>Max. Operating Temp.±2</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> </tbody> </table>  <p style="text-align: center;">Fig. 4</p> | Step | Temperature (°C) | Time (min.) | 1 | Min. Operating Temp.±3 | 30±3 | 2 | Room Temp. | 2 to 3 | 3 | Max. Operating Temp.±2 | 30±3 | 4 | Room Temp. | 2 to 3 | | | | | | | |
| Step | Temperature (°C) | Time (min.) | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Min. Operating Temp.±3 | 30±3 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Max. Operating Temp.±2 | 30±3 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Humidity (Steady State) | Appearance | No marking defects | Let the capacitor sit at 40±2°C and relative humidity of 90 to 95% for 500±24 hrs. Remove and let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±5.0% | | | | | | | | | | | | | | | | | | | | | | |
| | | Q | 350 min. | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| 16 | Life | Appearance | No marking defects | Apply voltage as Table for 1,000±4 hrs. at maximum operating temperature ±3°C. Remove and let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±3.0% | | | | | | | | | | | | | | | | | | | | | | |
| | | Q | 350 min. | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1" data-bbox="941 1795 1421 1900"> <thead> <tr> <th>Rated Voltage</th> <th>Applied Voltage</th> </tr> </thead> <tbody> <tr> <td>DC250V</td> <td>150% of the rated voltage</td> </tr> <tr> <td>DC630V, DC1kV, DC2kV, DC3.15kV</td> <td>120% of the rated voltage</td> </tr> </tbody> </table> <p>The charge/discharge current is less than 50mA.</p> | Rated Voltage | Applied Voltage | DC250V | 150% of the rated voltage | DC630V, DC1kV, DC2kV, DC3.15kV | 120% of the rated voltage | | | | | | | | | | | | | | | | |
| Rated Voltage | Applied Voltage | | | | | | | | | | | | | | | | | | | | | | | | |
| DC250V | 150% of the rated voltage | | | | | | | | | | | | | | | | | | | | | | | | |
| DC630V, DC1kV, DC2kV, DC3.15kV | 120% of the rated voltage | | | | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



Medium Voltage High Capacitance for General Use

■ Features

1. A new monolithic structure for small, high capacitance capable of operating at high voltage levels.
2. Sn-plated external electrodes realizes good solderability.
3. Use the GRM18/21/31 types with flow or reflow soldering, and other types with reflow soldering only.

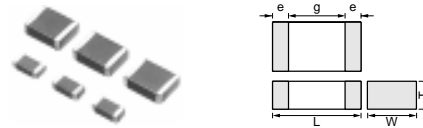

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|-----------|--------------|------------|--------|
| | L | W | T | e | g min. |
| GRM188 | 1.6 ±0.1 | 0.8 ±0.1 | 0.8 ±0.1 | 0.2 to 0.5 | 0.4 |
| GRM21A | 2.0 ±0.2 | 1.25 ±0.2 | 1.0 +0,-0.3 | | |
| GRM21B | | | 1.25 ±0.2 | | |
| GRM31B | 3.2 ±0.2 | 1.6 ±0.2 | 1.25 +0,-0.3 | 0.3 min. | 1.2 |
| GRM31C | | | 1.6 ±0.2 | | |
| GRM32Q | 3.2 ±0.3 | 2.5 ±0.2 | 1.5 +0,-0.3 | | |
| GRM32D | | | 2.0 +0,-0.3 | | |
| GRM43Q | 4.5 ±0.4 | 3.2 ±0.3 | 1.5 +0,-0.3 | | |
| GRM43D | | | 2.0 +0,-0.3 | | |
| GRM55D | 5.7 ±0.4 | 5.0 ±0.4 | 2.0 +0,-0.3 | 2.2 | 3.2 |

■ Applications

1. Ideal for use on diode-snubber circuits for switching power supplies.
2. Ideal for use as primary-secondary coupling for DC-DC converter.
3. Ideal for use on line filters and ringer detectors for telephones, facsimiles and modems.

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.



| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|--------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM188R72E221KW07D | DC250 | X7R (EIA) | 220pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM188R72E331KW07D | DC250 | X7R (EIA) | 330pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM188R72E471KW07D | DC250 | X7R (EIA) | 470pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM188R72E681KW07D | DC250 | X7R (EIA) | 680pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM188R72E102KW07D | DC250 | X7R (EIA) | 1000pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM21AR72E102KW01D | DC250 | X7R (EIA) | 1000pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM188R72E152KW07D | DC250 | X7R (EIA) | 1500pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM21AR72E152KW01D | DC250 | X7R (EIA) | 1500pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM188R72E222KW07D | DC250 | X7R (EIA) | 2200pF ±10% | 1.6 | 0.8 | 0.8 | 0.4 | 0.2 to 0.5 |
| GRM21AR72E222KW01D | DC250 | X7R (EIA) | 2200pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21AR72E332KW01D | DC250 | X7R (EIA) | 3300pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21AR72E472KW01D | DC250 | X7R (EIA) | 4700pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21AR72E682KW01D | DC250 | X7R (EIA) | 6800pF ±10% | 2.0 | 1.25 | 1.0 | 0.7 | 0.3 min. |
| GRM21BR72E103KW03L | DC250 | X7R (EIA) | 10000pF ±10% | 2.0 | 1.25 | 1.25 | 0.7 | 0.3 min. |
| GRM31BR72E153KW01L | DC250 | X7R (EIA) | 15000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72E223KW01L | DC250 | X7R (EIA) | 22000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31CR72E333KW03L | DC250 | X7R (EIA) | 33000pF ±10% | 3.2 | 1.6 | 1.6 | 1.2 | 0.3 min. |
| GRM31CR72E473KW03L | DC250 | X7R (EIA) | 47000pF ±10% | 3.2 | 1.6 | 1.6 | 1.2 | 0.3 min. |
| GRM31BR72E683KW01L | DC250 | X7R (EIA) | 68000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM32QR72E683KW01L | DC250 | X7R (EIA) | 68000pF ±10% | 3.2 | 2.5 | 1.5 | 1.2 | 0.3 min. |
| GRM31CR72E104KW03L | DC250 | X7R (EIA) | 0.10µF ±10% | 3.2 | 1.6 | 1.6 | 1.2 | 0.3 min. |
| GRM32DR72E104KW01L | DC250 | X7R (EIA) | 0.10µF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM32QR72E154KW01L | DC250 | X7R (EIA) | 0.15µF ±10% | 3.2 | 2.5 | 1.5 | 1.2 | 0.3 min. |
| GRM43QR72E154KW01L | DC250 | X7R (EIA) | 0.15µF ±10% | 4.5 | 3.2 | 1.5 | 2.2 | 0.3 min. |

Continued on the following page.

Continued from the preceding page.

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|--------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM32DR72E224KW01L | DC250 | X7R (EIA) | 0.22μF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM43DR72E224KW01L | DC250 | X7R (EIA) | 0.22μF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM43DR72E334KW01L | DC250 | X7R (EIA) | 0.33μF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM55DR72E334KW01L | DC250 | X7R (EIA) | 0.33μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |
| GRM43DR72E474KW01L | DC250 | X7R (EIA) | 0.47μF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM55DR72E474KW01L | DC250 | X7R (EIA) | 0.47μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |
| GRM55DR72E105KW01L | DC250 | X7R (EIA) | 1.0μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |
| GRM31BR72J102KW01L | DC630 | X7R (EIA) | 1000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J152KW01L | DC630 | X7R (EIA) | 1500pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J222KW01L | DC630 | X7R (EIA) | 2200pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J332KW01L | DC630 | X7R (EIA) | 3300pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J472KW01L | DC630 | X7R (EIA) | 4700pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J682KW01L | DC630 | X7R (EIA) | 6800pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR72J103KW01L | DC630 | X7R (EIA) | 10000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31CR72J153KW03L | DC630 | X7R (EIA) | 15000pF ±10% | 3.2 | 1.6 | 1.6 | 1.2 | 0.3 min. |
| GRM32QR72J223KW01L | DC630 | X7R (EIA) | 22000pF ±10% | 3.2 | 2.5 | 1.5 | 1.2 | 0.3 min. |
| GRM32DR72J333KW01L | DC630 | X7R (EIA) | 33000pF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM32DR72J473KW01L | DC630 | X7R (EIA) | 47000pF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM43QR72J683KW01L | DC630 | X7R (EIA) | 68000pF ±10% | 4.5 | 3.2 | 1.5 | 2.2 | 0.3 min. |
| GRM43DR72J104KW01L | DC630 | X7R (EIA) | 0.10μF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM55DR72J154KW01L | DC630 | X7R (EIA) | 0.15μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |
| GRM55DR72J224KW01L | DC630 | X7R (EIA) | 0.22μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |
| GRM31BR73A471KW01L | DC1000 | X7R (EIA) | 470pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR73A102KW01L | DC1000 | X7R (EIA) | 1000pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR73A152KW01L | DC1000 | X7R (EIA) | 1500pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR73A222KW01L | DC1000 | X7R (EIA) | 2200pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR73A332KW01L | DC1000 | X7R (EIA) | 3300pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM31BR73A472KW01L | DC1000 | X7R (EIA) | 4700pF ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GRM32QR73A682KW01L | DC1000 | X7R (EIA) | 6800pF ±10% | 3.2 | 2.5 | 1.5 | 1.2 | 0.3 min. |
| GRM32QR73A103KW01L | DC1000 | X7R (EIA) | 10000pF ±10% | 3.2 | 2.5 | 1.5 | 1.2 | 0.3 min. |
| GRM32DR73A153KW01L | DC1000 | X7R (EIA) | 15000pF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM32DR73A223KW01L | DC1000 | X7R (EIA) | 22000pF ±10% | 3.2 | 2.5 | 2.0 | 1.2 | 0.3 min. |
| GRM43DR73A333KW01L | DC1000 | X7R (EIA) | 33000pF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM43DR73A473KW01L | DC1000 | X7R (EIA) | 47000pF ±10% | 4.5 | 3.2 | 2.0 | 2.2 | 0.3 min. |
| GRM55DR73A104KW01L | DC1000 | X7R (EIA) | 0.10μF ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |

Specifications and Test Methods

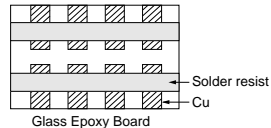
| No. | Item | Specifications | Test Method | | | | | | | | | | | | |
|------|---|--|--|------|------------------|---|------|---|------------------------|---|------|---|------------------------|---|------|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | No failure should be observed when 150% of the rated voltage (200% of the rated voltage in case of rated voltage: DC250V, 120% of the rated voltage in case of rated voltage: DC1kV) is applied between the terminations for 1 to 5 sec., provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | |
| 5 | Insulation Resistance (I.R.) | C ≥ 0.01μF: More than 100MΩ • μF C < 0.01μF: More than 10,000MΩ | The insulation resistance should be measured with DC500±50V (DC250±25V in case of rated voltage: DC250V) and within 60±5 sec. of charging. | | | | | | | | | | | | |
| 6 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at a frequency of 1±0.2kHz and a voltage of AC1±0.2V(r.m.s.) | | | | | | | | | | | | |
| 7 | Dissipation Factor (D.F.) | 0.025 max. | | | | | | | | | | | | | |
| 8 | Capacitance Temperature Characteristics | Cap. Change Within ±15% (Temp. Range: -55 to +125°C) | <p>The capacitance measurement should be made at each step specified in Table.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>Min. Operating Temp.±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>Max. Operating Temp.±2</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> <p>•Pretreatment Perform a heat treatment at 150 ± 9.0 °C for 60±5 min. and then let sit for 24±2 hrs. at room condition*.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 | Max. Operating Temp.±2 | 5 | 25±2 |
| Step | Temperature (°C) | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | |
| 9 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | <p>Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p>  <p style="text-align: center;">Fig. 1</p> | | | | | | | | | | | | |
| 10 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | |
| | | | <p>Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.).</p>  <p style="text-align: center;">Glass Epoxy Board</p> | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page.

Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------|------------------------------|--|---|---|----------------|--|--|--|--|---|---|---|---|---------|-----|-----|-----|-----|----------|-----|-----|------|---------|-----|-----|-----|---------|-----|-----|-----|---------|-----|-----|-----|---------|
| 11 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | |  <table border="1" data-bbox="414 478 889 661"> <thead> <tr> <th>L×W (mm)</th> <th colspan="4">Dimension (mm)</th> </tr> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>1.6×0.8</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> <td rowspan="6">1.0</td> </tr> <tr> <td>2.0×1.25</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> <tr> <td>3.2×1.6</td> <td>2.2</td> <td>5.0</td> <td>2.0</td> </tr> <tr> <td>3.2×2.5</td> <td>2.2</td> <td>5.0</td> <td>2.9</td> </tr> <tr> <td>4.5×3.2</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>5.7×5.0</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> <p>Fig. 2</p> | | L×W (mm) | Dimension (mm) | | | | | a | b | c | d | 1.6×0.8 | 1.0 | 3.0 | 1.2 | 1.0 | 2.0×1.25 | 1.2 | 4.0 | 1.65 | 3.2×1.6 | 2.2 | 5.0 | 2.0 | 3.2×2.5 | 2.2 | 5.0 | 2.9 | 4.5×3.2 | 3.5 | 7.0 | 3.7 | 5.7×5.0 |
| L×W (mm) | Dimension (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.6×0.8 | 1.0 | 3.0 | 1.2 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0×1.25 | 1.2 | 4.0 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.2×1.6 | 2.2 | 5.0 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.2×2.5 | 2.2 | 5.0 | 2.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.5×3.2 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.7×5.0 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | No marking defects | Preheat the capacitor at 120 to 150°C* for 1 min. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition* for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s •Pretreatment Perform a heat treatment at 150±1°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | C≥0.01μF: More than 100MΩ • μF C<0.01μF: More than 10,000MΩ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Temperature Cycle | Appearance | No marking defects | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±7.5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | C≥0.01μF: More than 100MΩ • μF C<0.01μF: More than 10,000MΩ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Humidity (Steady State) | Appearance | No marking defects | Let the capacitor sit at 40±2°C and relative humidity of 90 to 95% for 500±24 hrs. Remove and let sit for 24±2 hrs. at room condition*, then measure. •Pretreatment Perform a heat treatment at 150±1°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | C≥0.01μF: More than 10MΩ • μF C<0.01μF: More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




Fig. 3

| Step | Temperature | Time |
|------|--------------|--------|
| 1 | 100 to 120°C | 1 min. |
| 2 | 170 to 200°C | 1 min. |

| Step | Temperature (°C) | Time (min.) |
|------|------------------------|-------------|
| 1 | Min. Operating Temp.±3 | 30±3 |
| 2 | Room Temp. | 2 to 3 |
| 3 | Max. Operating Temp.±2 | 30±3 |
| 4 | Room Temp. | 2 to 3 |




Fig. 4

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. ↗

Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method |
|-----|--|---------------------|--|
| 16 | Life | Appearance | No marking defects |
| | | Capacitance Change | Within $\pm 15\%$ (rated voltage: DC250V, DC630V) Within $\pm 20\%$ (rated voltage: DC1kV) |
| | | D.F. | 0.05 max. |
| | | I.R. | $C \geq 0.01\mu\text{F}$: More than $10\text{M}\Omega \cdot \mu\text{F}$ $C < 0.01\mu\text{F}$: More than $1,000\text{M}\Omega$ |
| | | Dielectric Strength | In accordance with item No.4 |
| | | | Apply 120% of the rated voltage (150% of the rated voltage in case of rated voltage: DC250V, 110% of the rated voltage in case of rated voltage: DC1kV) for $1,000 \pm 48$ hrs. at maximum operating temperature $\pm 3^\circ\text{C}$. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. The charge/discharge current is less than 50mA. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. |
| 17 | Humidity Loading (Application: DC250V, DC630V item) | Appearance | No marking defects |
| | | Capacitance Change | Within $\pm 15\%$ |
| | | D.F. | 0.05 max. |
| | | I.R. | $C \geq 0.01\mu\text{F}$: More than $10\text{M}\Omega \cdot \mu\text{F}$ $C < 0.01\mu\text{F}$: More than $1,000\text{M}\Omega$ |
| | | Dielectric Strength | In accordance with item No.4 |
| | | | Apply the rated voltage at $40 \pm 2^\circ\text{C}$ and relative humidity of 90 to 95% for 500 ± 24 hrs. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. |

* "Room condition" Temperature: 15 to 35°C , Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



Only for LCD Backlight Inverter Circuit

■ Features

1. Low-loss and suitable for high frequency circuits
2. Murata's original internal electrode structure realizes high flash-over voltage.
3. A new monolithic structure for small, surface-mountable devices capable of operating at high voltage levels.
4. Sn-plated external electrodes realize good solderability.
5. Only for reflow soldering
6. The capacitors less than 22pF can be applied maximum 4.0kV peak to peak at 100kHz or less only for the ballast or the resonance usage in the LCD backlight inverter circuit.

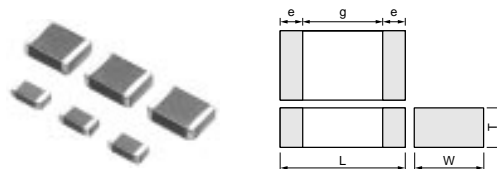

| Part Number | Dimensions (mm) | | | | |
|---------------|-----------------|----------|--------------|--------|--------|
| | L | W | T | e min. | g min. |
| GRM42A | 4.5 ±0.3 | 2.0 ±0.2 | 1.0 +0, -0.3 | 0.3 | 2.9 |

■ Applications




Ideal for use as the ballast in LCD backlight inverter.

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

11

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|---------------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GRM42A5C3F050DW01L | DC3150 | C0G (EIA) | 5.0 ±0.5pF | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F100JW01L | DC3150 | C0G (EIA) | 10 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F120JW01L | DC3150 | C0G (EIA) | 12 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F150JW01L | DC3150 | C0G (EIA) | 15 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F180JW01L | DC3150 | C0G (EIA) | 18 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F220JW01L | DC3150 | C0G (EIA) | 22 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F270JW01L | DC3150 | C0G (EIA) | 27 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F330JW01L | DC3150 | C0G (EIA) | 33 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F390JW01L | DC3150 | C0G (EIA) | 39 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |
| GRM42A5C3F470JW01L | DC3150 | C0G (EIA) | 47 ±5% | 4.5 | 2.0 | 1.0 | 2.9 | 0.3 min. |


Specifications and Test Methods
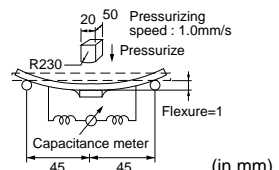
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | |
|--|---|---|--|----------|------------------|---|------|---|------------------------|---|------|---|------------------------|-----|------|-----|-----|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimension | Using calipers | | | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | No failure should be observed when DC4095V is applied between the terminations for 1 to 5 sec., provided the charge/discharge current is less than 50mA. | | | | | | | | | | | | | | |
| 5 | Insulation Resistance (I.R.) | More than 10,000MΩ | The insulation resistance should be measured with DC500±50V and within 60±5 sec. of charging. | | | | | | | | | | | | | | |
| 6 | Capacitance | Within the specified tolerance | The capacitance/Q should be measured at a frequency of 1±0.2MHz and a voltage of AC0.5 to 5V(r.m.s.) | | | | | | | | | | | | | | |
| 7 | Q | 1,000 min. | | | | | | | | | | | | | | | |
| 8 | Capacitance Temperature Characteristics | Temp. Coefficient 0±30ppm/°C (Temp. Range: +25 to +125°C) 0+30, -72ppm/°C (Temp. Range: -55 to +25°C) | The capacitance measurement should be made at each step specified in Table. | | | | | | | | | | | | | | |
| | | | <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>Min. Operating Temp.±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>Max. Operating Temp.±2</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 | Max. Operating Temp.±2 | 5 | 25±2 | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | | | |
| 9 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | <p>Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <div style="text-align: center;">  <p>10N, 10±1s Glass Epoxy Board</p> </div> <p style="text-align: center;">Fig. 1</p> | | | | | | | | | | | | | | |
| 10 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | |
| | | Q | 1,000 min. | | | | | | | | | | | | | | |
| 11 | Deflection | No cracking or marking defects should occur. | <p>Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <div style="text-align: center;">  <p style="text-align: center;">t: 1.6</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">L×W (mm)</th> <th colspan="4">Dimension (mm)</th> </tr> <tr> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>4.5×2.0</td> <td>3.5</td> <td>7.0</td> <td>2.4</td> <td>1.0</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> </div> | L×W (mm) | Dimension (mm) | | | | a | b | c | d | 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 |
| | | L×W (mm) | | | Dimension (mm) | | | | | | | | | | | | |
| a | b | | c | d | | | | | | | | | | | | | |
| 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 | | | | | | | | | | | | | |
| <div style="text-align: center;">  <p>20 50 Pressurizing speed : 1.0mm/s Pressurize R230 Flexure=1 Capacitance meter 45 45 (in mm)</p> </div> <p style="text-align: center;">Fig. 3</p> | | | | | | | | | | | | | | | | | |

Continued on the following page.

Specifications and Test Methods

Continued from the preceding page.
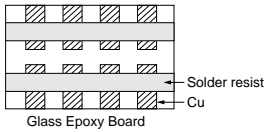
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|------|------------------------------|---|---|------|------------------|-------------|---|------------------------------|------------|---|--------------|--------|---|------------------------------|------------|---|------------|--------|
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2 ± 0.5 sec. Immersing speed: 25 ± 2.5 mm/s Temp. of solder: $245 \pm 5^\circ\text{C}$ Lead Free Solder (Sn-3.0Ag-0.5Cu) $235 \pm 5^\circ\text{C}$ H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within $\pm 2.5\%$ | | | | | | | | | | | | | | | |
| | | Q | 1,000 min. | | | | | | | | | | | | | | | |
| | | I.R. | More than 10,000M Ω | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | |
| | | | Preheat the capacitor as table. Immerse the capacitor in solder solution at $260 \pm 5^\circ\text{C}$ for 10 ± 1 sec. Let sit at room condition* for 24 ± 2 hrs., then measure. •Immersing speed: 25 ± 2.5 mm/s *Preheating | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>100 to 120°C</td> <td>1 min.</td> </tr> <tr> <td>2</td> <td>170 to 200°C</td> <td>1 min.</td> </tr> </tbody> </table> | Step | Temperature | Time | 1 | 100 to 120°C | 1 min. | 2 | 170 to 200°C | 1 min. | | | | | | |
| Step | Temperature | Time | | | | | | | | | | | | | | | | |
| 1 | 100 to 120°C | 1 min. | | | | | | | | | | | | | | | | |
| 2 | 170 to 200°C | 1 min. | | | | | | | | | | | | | | | | |
| 14 | Temperature Cycle | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within $\pm 2.5\%$ | | | | | | | | | | | | | | | |
| | | Q | 1,000 min. | | | | | | | | | | | | | | | |
| | | I.R. | More than 10,000M Ω | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | |
| | | | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24 ± 2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Operating Temp. ± 3</td> <td>30 \pm 3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> <tr> <td>3</td> <td>Max. Operating Temp. ± 2</td> <td>30 \pm 3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> </tbody> </table> | Step | Temperature (°C) | Time (min.) | 1 | Min. Operating Temp. ± 3 | 30 \pm 3 | 2 | Room Temp. | 2 to 3 | 3 | Max. Operating Temp. ± 2 | 30 \pm 3 | 4 | Room Temp. | 2 to 3 |
| Step | Temperature (°C) | Time (min.) | | | | | | | | | | | | | | | | |
| 1 | Min. Operating Temp. ± 3 | 30 \pm 3 | | | | | | | | | | | | | | | | |
| 2 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | |
| 3 | Max. Operating Temp. ± 2 | 30 \pm 3 | | | | | | | | | | | | | | | | |
| 4 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | |
| | | |  <p style="text-align: center;">Fig. 4</p> | | | | | | | | | | | | | | | |
| 15 | Humidity (Steady State) | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within $\pm 5.0\%$ | | | | | | | | | | | | | | | |
| | | Q | 350 min. | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000M Ω | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | |
| | | | Let the capacitor sit at $40 \pm 2^\circ\text{C}$ and relative humidity of 90 to 95% for 500 ± 24 hrs. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | |
| 16 | Life | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within $\pm 3.0\%$ | | | | | | | | | | | | | | | |
| | | Q | 350 min. | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000M Ω | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | |
| | | | Apply 120% of the rated voltage for $1,000 \pm 48$ hrs. at maximum operating temperature $\pm 3^\circ\text{C}$. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. The charge/discharge current is less than 50mA. | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



Only for Information Devices

■ Features

1. These items are designed specifically for telecommunications devices (IEEE802.3) in Ethernet LAN and primary-secondary coupling for DC-DC converter.
2. A new monolithic structure for small, high capacitance capable of operating at high voltage levels
3. Sn-plated external electrodes realizes good solderability.
4. Only for reflow soldering
5. The low-profile type (thickness: 1.5mm max.) is available. Fit for use on thinner type equipment.

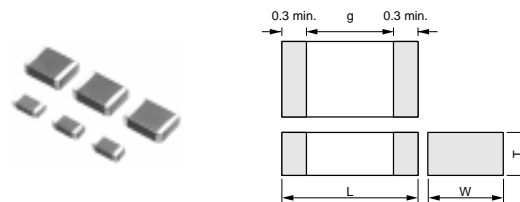

| Part Number | Dimensions (mm) | | | |
|-------------|-----------------|----------|--------------|--------|
| | L | W | T | g min. |
| GR442Q | 4.5 ±0.3 | 2.0 ±0.2 | 1.5 +0, -0.3 | 2.5 |
| GR443D | 4.5 ±0.4 | 3.2 ±0.3 | 2.0 +0, -0.3 | |
| GR443Q | | | 1.5 +0, -0.3 | |
| GR455D | 5.7 ±0.4 | 5.0 ±0.4 | 2.0 +0, -0.3 | 3.2 |



■ Applications

1. Ideal for use on telecommunications devices in Ethernet LAN
2. Ideal for use as primary-secondary coupling for DC-DC converter

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GR442QR73D101KW01L | DC2000 | X7R (EIA) | 100 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D121KW01L | DC2000 | X7R (EIA) | 120 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D151KW01L | DC2000 | X7R (EIA) | 150 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D181KW01L | DC2000 | X7R (EIA) | 180 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D221KW01L | DC2000 | X7R (EIA) | 220 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D271KW01L | DC2000 | X7R (EIA) | 270 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D331KW01L | DC2000 | X7R (EIA) | 330 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D391KW01L | DC2000 | X7R (EIA) | 390 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D471KW01L | DC2000 | X7R (EIA) | 470 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D561KW01L | DC2000 | X7R (EIA) | 560 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D681KW01L | DC2000 | X7R (EIA) | 680 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D821KW01L | DC2000 | X7R (EIA) | 820 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D102KW01L | DC2000 | X7R (EIA) | 1000 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D122KW01L | DC2000 | X7R (EIA) | 1200 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR442QR73D152KW01L | DC2000 | X7R (EIA) | 1500 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GR443QR73D182KW01L | DC2000 | X7R (EIA) | 1800 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GR443QR73D222KW01L | DC2000 | X7R (EIA) | 2200 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GR443QR73D272KW01L | DC2000 | X7R (EIA) | 2700 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GR443QR73D332KW01L | DC2000 | X7R (EIA) | 3300 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GR443QR73D392KW01L | DC2000 | X7R (EIA) | 3900 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GR443DR73D472KW01L | DC2000 | X7R (EIA) | 4700 ±10% | 4.5 | 3.2 | 2.0 | 2.5 | 0.3 min. |
| GR455DR73D103KW01L | DC2000 | X7R (EIA) | 10000 ±10% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |

Specifications and Test Methods

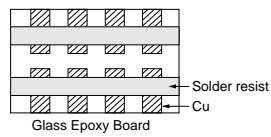
| No. | Item | Specifications | Test Method | | | | | | | | | | | | |
|---------------|---|--|---|---------------|------------------|------|-------|---------------------------|------------------------|-----------------|-----------|---|------------------------|---|------|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | <p>No failure should be observed when voltage in table is applied between the terminations, provided the charge/discharge current is less than 50mA.</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #f2f2f2;"> <th>Rated Voltage</th> <th>Test Voltage</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td rowspan="2" style="text-align: center;">DC2kV</td> <td style="text-align: center;">120% of the rated voltage</td> <td style="text-align: center;">60±1 sec.</td> </tr> <tr> <td style="text-align: center;">AC1500V(r.m.s.)</td> <td style="text-align: center;">60±1 sec.</td> </tr> </tbody> </table> | Rated Voltage | Test Voltage | Time | DC2kV | 120% of the rated voltage | 60±1 sec. | AC1500V(r.m.s.) | 60±1 sec. | | | | |
| Rated Voltage | Test Voltage | Time | | | | | | | | | | | | | |
| DC2kV | 120% of the rated voltage | 60±1 sec. | | | | | | | | | | | | | |
| | AC1500V(r.m.s.) | 60±1 sec. | | | | | | | | | | | | | |
| 5 | Pulse Voltage | No self healing breakdowns or flash-overs have taken place in the capacitor. | <p>10 impulse of alternating polarity is subjected. (5 impulse for each polarity) The interval between impulse is 60 sec. Applied Voltage: 2.5kV zero to peak</p> | | | | | | | | | | | | |
| 6 | Insulation Resistance (I.R.) | More than 6,000MΩ | The insulation resistance should be measured with DC500±50V and within 60±5 sec. of charging. | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at a frequency of 1±0.2kHz and a voltage of AC1±0.2V(r.m.s.) | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) | 0.025 max. | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | Cap. Change within ±15% (Temp. Range: -55 to +125°C) | <p>The capacitance measurement should be made at each step specified in Table.</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #f2f2f2;"> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Min. Operating Temp.±3</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Max. Operating Temp.±2</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">25±2</td> </tr> </tbody> </table> <p>•Pretreatment Perform a heat treatment at 150±5°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 | Max. Operating Temp.±2 | 5 | 25±2 |
| Step | Temperature (°C) | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | <p>Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <div style="text-align: center;">  <p>10N, 10±1s Glass Epoxy Board</p> </div> <p style="text-align: center;">Fig. 1</p> | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | |
| | | | <p>Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.).</p> <div style="text-align: center;">  <p>Solder resist Cu Glass Epoxy Board</p> </div> | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page.

Specifications and Test Methods


Continued from the preceding page.

| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | |
|----------|------------------------------|---|---|--|----------------|--|--|--|--|---|---|---|---|---------|-----|-----|-----|-----|---------|-----|-----|-----|---------|-----|
| 12 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | |
| | |  <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">L×W (mm)</th> <th colspan="4" style="text-align: center;">Dimension (mm)</th> </tr> <tr> <th></th> <th style="text-align: center;">a</th> <th style="text-align: center;">b</th> <th style="text-align: center;">c</th> <th style="text-align: center;">d</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">4.5×2.0</td> <td style="text-align: center;">3.5</td> <td style="text-align: center;">7.0</td> <td style="text-align: center;">2.4</td> <td rowspan="3" style="text-align: center; vertical-align: middle;">1.0</td> </tr> <tr> <td style="text-align: center;">4.5×3.2</td> <td style="text-align: center;">3.5</td> <td style="text-align: center;">7.0</td> <td style="text-align: center;">3.7</td> </tr> <tr> <td style="text-align: center;">5.7×5.0</td> <td style="text-align: center;">4.5</td> <td style="text-align: center;">8.0</td> <td style="text-align: center;">5.6</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> | | L×W (mm) | Dimension (mm) | | | | | a | b | c | d | 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 | 4.5×3.2 | 3.5 | 7.0 | 3.7 | 5.7×5.0 | 4.5 |
| L×W (mm) | Dimension (mm) | | | | | | | | | | | | | | | | | | | | | | | |
| | a | b | c | d | | | | | | | | | | | | | | | | | | | | |
| 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 | | | | | | | | | | | | | | | | | | | | |
| 4.5×3.2 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | |
| 5.7×5.0 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | | | | | | |
| 14 | Resistance to Soldering Heat | Appearance | No marking defects | Preheat the capacitor as table. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition* for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s •Pretreatment Perform a heat treatment at 150±18°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±10% | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | |
| 15 | Temperature Cycle | Appearance | No marking defects | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 3,000MΩ | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | |
| 16 | Humidity (Steady State) | Appearance | No marking defects | Let the capacitor sit at 40±2°C and relative humidity of 90 to 95% for 500±24 hrs. Remove and let sit for 24±2 hrs. at room condition*, then measure. •Pretreatment Perform a heat treatment at 150±18°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | |
| | | I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | |

*Preheating

| Step | Temperature | Time |
|------|--------------|--------|
| 1 | 100 to 120°C | 1 min. |
| 2 | 170 to 200°C | 1 min. |


| Step | Temperature (°C) | Time (min.) |
|------|------------------------|-------------|
| 1 | Min. Operating Temp.±3 | 30±3 |
| 2 | Room Temp. | 2 to 3 |
| 3 | Max. Operating Temp.±2 | 30±3 |
| 4 | Room Temp. | 2 to 3 |



* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. ↗

Specifications and Test Methods

 Continued from the preceding page.

| No. | Item | Specifications | Test Method |
|-----|---------------------|------------------------------|--|
| 17 | Life | Appearance | Apply 110% of the rated voltage for 1,000 ± 48 hrs. at maximum operating temperature ±3°C. Remove and let sit for 24±2 hrs. at room condition*, then measure. The charge/discharge current is less than 50mA. •Pretreatment Apply test voltage for 60±5 min. at test temperature. Remove and let sit for 24±2 hrs. at room condition*. |
| | Capacitance Change | Within ±20% | |
| | D.F. | 0.05 max. | |
| | I.R. | More than 2,000MΩ | |
| | Dielectric Strength | In accordance with item No.4 | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



Only for Camera Flash Circuit

■ Features

1. Suitable for the trigger of the flash circuit, because real capacitance is stable during operating voltage.
2. The thin type fit for thinner camera.
3. Sn-plated external electrodes realizes good solderability.
4. For flow and reflow soldering

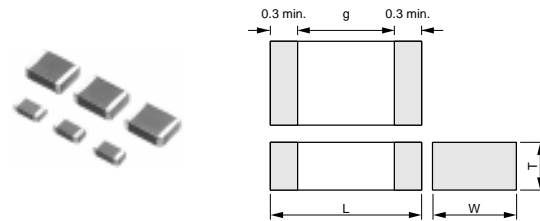

| Part Number | Dimensions (mm) | | | |
|-------------|-----------------|----------|---------------|--------|
| | L | W | T | g min. |
| GR731A | 3.2 ±0.2 | 1.6 ±0.2 | 1.0 +0, -0.3 | 1.2 |
| GR731B | | | 1.25 +0, -0.3 | |
| GR731C | | | 1.6 ±0.2 | |



■ Applications

For strobe circuit

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as Ågfor Automotive useÅh on its catalog can be used for automobile applications such as Power train and Safety equipment.

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GR731AW0BB103KW01D | DC350 | - | 10000 ±10% | 3.2 | 1.6 | 1.0 | 1.2 | 0.3 min. |
| GR731AW0BB153KW01D | DC350 | - | 15000 ±10% | 3.2 | 1.6 | 1.0 | 1.2 | 0.3 min. |
| GR731BW0BB223KW01L | DC350 | - | 22000 ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GR731BW0BB333KW01L | DC350 | - | 33000 ±10% | 3.2 | 1.6 | 1.25 | 1.2 | 0.3 min. |
| GR731CW0BB473KW03L | DC350 | - | 47000 ±10% | 3.2 | 1.6 | 1.6 | 1.2 | 0.3 min. |

Specifications and Test Methods


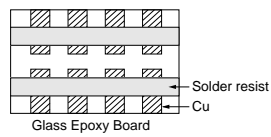
| No. | Item | Specifications | Test Method | | | | | | | | | |
|------|---|---|--|------|------------------|---|------|---|------------------------|---|------|---|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | |
| 3 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | No failure should be observed when DC500V is applied between the terminations for 1 to 5 sec., provided the charge/discharge current is less than 50mA. | | | | | | | | | |
| 5 | Insulation Resistance (I.R.) | C ≥ 0.01μF: More than 100MΩ • μF C < 0.01μF: More than 10,000MΩ | The insulation resistance should be measured with DC250±50V and within 60±5 sec. of charging. | | | | | | | | | |
| 6 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at a frequency of 1±0.2kHz and a voltage of AC1±0.2V(r.m.s.) | | | | | | | | | |
| 7 | Dissipation Factor (D.F.) | 0.025 max. | | | | | | | | | | |
| 8 | Capacitance Temperature Characteristics | Cap. Change Within ±10% (Apply DC350V bias) Within ±33% (No DC bias) (Temp. Range : -55 to +125°C) | The capacitance measurement should be made at each step specified in Table. | | | | | | | | | |
| | | | <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 10px;"> <thead> <tr style="background-color: #f2f2f2;"> <th style="width: 15%;">Step</th> <th style="width: 85%;">Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Min. Operating Temp.±3</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">25±2</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Max. Operating Temp.±2</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">25±2</td> </tr> </tbody> </table> <p>•Pretreatment Perform a heat treatment at 150±5°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 |
| Step | Temperature (°C) | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | |
| 9 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | <p>Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.</p> <div style="text-align: center;">  <p>10N, 10±1s Glass Epoxy Board</p> </div> <p style="text-align: center;">Fig. 1</p> | | | | | | | | | |
| 10 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | |
| | | | <p>Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.).</p> <div style="text-align: center;">  <p>Solder resist Cu Glass Epoxy Board</p> </div> | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page.

Specifications and Test Methods

Continued from the preceding page.
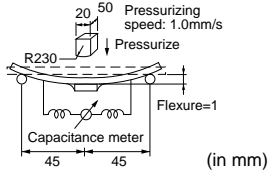
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | |
|---------------------|--|---|---|--|----------------|------------------|-------------|---|------------------------|------|---|------------|--------|---------|------------------------|------|-----|------------|---|
| 11 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | |
| | |  <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">L×W (mm)</th> <th colspan="4" style="text-align: center;">Dimension (mm)</th> </tr> <tr> <td></td> <th style="text-align: center;">a</th> <th style="text-align: center;">b</th> <th style="text-align: center;">c</th> <th style="text-align: center;">d</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3.2×1.6</td> <td style="text-align: center;">2.2</td> <td style="text-align: center;">5.0</td> <td style="text-align: center;">2.0</td> <td style="text-align: center;">1.0</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> | | L×W (mm) | Dimension (mm) | | | | | a | b | c | d | 3.2×1.6 | 2.2 | 5.0 | 2.0 | 1.0 |  <p style="text-align: center;">Fig. 3</p> |
| L×W (mm) | Dimension (mm) | | | | | | | | | | | | | | | | | | |
| | a | b | c | d | | | | | | | | | | | | | | | |
| 3.2×1.6 | 2.2 | 5.0 | 2.0 | 1.0 | | | | | | | | | | | | | | | |
| 12 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | |
| 13 | Resistance to Soldering Heat | Appearance | No marking defects | Preheat the capacitor at 120 to 150°C* for 1 min. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition* for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s •Pretreatment Perform a heat treatment at 150±1°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±10% | | | | | | | | | | | | | | | | |
| | | D.F. | 0.025 max. | | | | | | | | | | | | | | | | |
| | | I.R. | C≥0.01μF: More than 100MΩ • μF C<0.01μF: More than 10,000MΩ | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | |
| 14 | Temperature Cycle | Appearance | No marking defects | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24±2 hrs. at room condition*, then measure. <table border="1" style="margin: 10px auto; border-collapse: collapse; width: 100%;"> <thead> <tr> <th style="text-align: center;">Step</th> <th style="text-align: center;">Temperature (°C)</th> <th style="text-align: center;">Time (min.)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">Min. Operating Temp.±3</td> <td style="text-align: center;">30±3</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Room Temp.</td> <td style="text-align: center;">2 to 3</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">Max. Operating Temp.±2</td> <td style="text-align: center;">30±3</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Room Temp.</td> <td style="text-align: center;">2 to 3</td> </tr> </tbody> </table> •Pretreatment Perform a heat treatment at 150±1°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | Step | Temperature (°C) | Time (min.) | 1 | Min. Operating Temp.±3 | 30±3 | 2 | Room Temp. | 2 to 3 | 3 | Max. Operating Temp.±2 | 30±3 | 4 | Room Temp. | 2 to 3 |
| | | Step | Temperature (°C) | | Time (min.) | | | | | | | | | | | | | | |
| | | 1 | Min. Operating Temp.±3 | | 30±3 | | | | | | | | | | | | | | |
| | | 2 | Room Temp. | | 2 to 3 | | | | | | | | | | | | | | |
| | | 3 | Max. Operating Temp.±2 | | 30±3 | | | | | | | | | | | | | | |
| 4 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±7.5% | | | | | | | | | | | | | | | | | | |
| D.F. | 0.025 max. | | | | | | | | | | | | | | | | | | |
| I.R. | C≥0.01μF: More than 100MΩ • μF C<0.01μF: More than 10,000MΩ | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | |
| 15 | Humidity (Steady State) | Appearance | No marking defects | Let the capacitor sit at 40±2°C and relative humidity of 90 to 95% for 500±24 hrs. Remove and let sit for 24±2 hrs. at room condition*, then measure. •Pretreatment Perform a heat treatment at 150±1°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. | | | | | | | | | | | | | | | |
| | | Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | | | | | | | | |
| | | I.R. | C≥0.01μF: More than 10MΩ • μF C<0.01μF: More than 1,000MΩ | | | | | | | | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page.

Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method | |
|-----|------------------|---------------------|--|--|
| 16 | Life | Appearance | Apply DC350V for $1,000 \pm 4\%$ hrs. at maximum operating temperature $\pm 3^\circ\text{C}$. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. The charge/discharge current is less than 50mA. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. | |
| | | Capacitance Change | | Within $\pm 15\%$ |
| | | D.F. | | 0.05 max. |
| | | I.R. | | $C \geq 0.01\mu\text{F}$: More than $10\text{M}\Omega \cdot \mu\text{F}$ $C < 0.01\mu\text{F}$: More than $1,000\text{M}\Omega$ |
| | | Dielectric Strength | | In accordance with item No.4 |
| 17 | Humidity Loading | Appearance | Apply the rated voltage at $40 \pm 2^\circ\text{C}$ and relative humidity of 90 to 95% for $500 \pm 2\%$ hrs. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. | |
| | | Capacitance Change | | Within $\pm 15\%$ |
| | | D.F. | | 0.05 max. |
| | | I.R. | | $C \geq 0.01\mu\text{F}$: More than $10\text{M}\Omega \cdot \mu\text{F}$ $C < 0.01\mu\text{F}$: More than $1,000\text{M}\Omega$ |
| | | Dielectric Strength | | In accordance with item No.4 |

* "Room condition" Temperature: 15 to 35°C , Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



AC250V (r.m.s.) Type (Which Meet Japanese Law)

■ Features

1. Chip monolithic ceramic capacitor for AC lines.
2. A new monolithic structure for small, high capacitance capable of operating at high voltage levels.
3. Sn-plated external electrodes realizes good solderability.
4. Only for reflow soldering
5. Capacitance 0.01 to 0.1uF for connecting lines and 470 to 4700pF for connecting lines to earth.

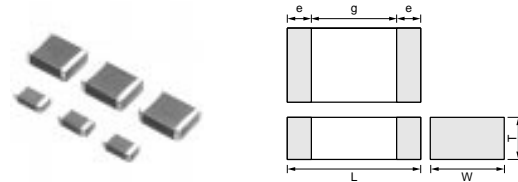

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|----------|--------------|--------|--------|
| | L | W | T | e min. | g min. |
| GA242Q | 4.5 ±0.3 | 2.0 ±0.2 | 1.5 +0, -0.3 | 0.3 | 2.5 |
| GA243D | 4.5 ±0.4 | 3.2 ±0.3 | 2.0 +0, -0.3 | | |
| GA243Q | | | 1.5 +0, -0.3 | | |
| GA255D | 5.7 ±0.4 | 5.0 ±0.4 | 2.0 +0, -0.3 | | 3.2 |

■ Applications

Noise suppression filters for switching power supplies, telephones, facsimiles, modems.




Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

■ Reference Standard


GA2 series obtains no safety approval. This series is based on the standards of the electrical appliance and material safety law of Japan (separated table 4).

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|--------------|---------------|--------------|------------------|-----------------------|------------------|
| GA242QR7E2471MW01L | AC250 (r.m.s.) | X7R (EIA) | 470pF ±20% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA242QR7E2102MW01L | AC250 (r.m.s.) | X7R (EIA) | 1000pF ±20% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA243QR7E2222MW01L | AC250 (r.m.s.) | X7R (EIA) | 2200pF ±20% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA243QR7E2332MW01L | AC250 (r.m.s.) | X7R (EIA) | 3300pF ±20% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA243DR7E2472MW01L | AC250 (r.m.s.) | X7R (EIA) | 4700pF ±20% | 4.5 | 3.2 | 2.0 | 2.5 | 0.3 min. |
| GA243QR7E2103MW01L | AC250 (r.m.s.) | X7R (EIA) | 10000pF ±20% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA243QR7E2223MW01L | AC250 (r.m.s.) | X7R (EIA) | 22000pF ±20% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA243DR7E2473MW01L | AC250 (r.m.s.) | X7R (EIA) | 47000pF ±20% | 4.5 | 3.2 | 2.0 | 2.5 | 0.3 min. |
| GA255DR7E2104MW01L | AC250 (r.m.s.) | X7R (EIA) | 0.10µF ±20% | 5.7 | 5.0 | 2.0 | 3.2 | 0.3 min. |

Specifications and Test Methods

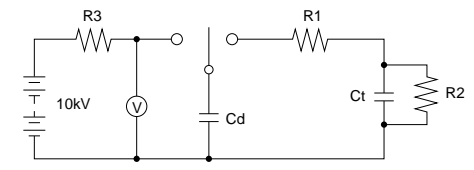
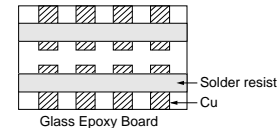
| No. | Item | Specifications | Test Method | | | | | | | | | | | | |
|---------------------|--|---|---|---------------------|------------------|------------|-----------------|------------|------------------------|---|------|---|------------------------|---|------|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | No failure should be observed when voltage in table is applied between the terminations for 60±1 sec., provided the charge/discharge current is less than 50mA. <table border="1"> <thead> <tr> <th>Nominal Capacitance</th> <th>Test Voltage</th> </tr> </thead> <tbody> <tr> <td>C≥10,000pF</td> <td>AC575V (r.m.s.)</td> </tr> <tr> <td>C<10,000pF</td> <td>AC1500V (r.m.s.)</td> </tr> </tbody> </table> | Nominal Capacitance | Test Voltage | C≥10,000pF | AC575V (r.m.s.) | C<10,000pF | AC1500V (r.m.s.) | | | | | | |
| Nominal Capacitance | Test Voltage | | | | | | | | | | | | | | |
| C≥10,000pF | AC575V (r.m.s.) | | | | | | | | | | | | | | |
| C<10,000pF | AC1500V (r.m.s.) | | | | | | | | | | | | | | |
| 5 | Insulation Resistance (I.R.) | More than 2,000MΩ | The insulation resistance should be measured with DC500±50V and within 60±5 sec. of charging. | | | | | | | | | | | | |
| 6 | Capacitance | Within the specified tolerance | The capacitance/D.F. should be measured at a frequency of 1±0.2kHz and a voltage of AC1±0.2V (r.m.s.) | | | | | | | | | | | | |
| 7 | Dissipation Factor (D.F.) | 0.025 max. | | | | | | | | | | | | | |
| 8 | Capacitance Temperature Characteristics | Cap. Change Within ±15% (Temp. Range: -55 to +125°C) | The capacitance measurement should be made at each step specified in Table. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2</td> </tr> <tr> <td>2</td> <td>Min. Operating Temp.±3</td> </tr> <tr> <td>3</td> <td>25±2</td> </tr> <tr> <td>4</td> <td>Max. Operating Temp.±2</td> </tr> <tr> <td>5</td> <td>25±2</td> </tr> </tbody> </table> <p>•Pretreatment Perform a heat treatment at 150±10°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*.</p> | Step | Temperature (°C) | 1 | 25±2 | 2 | Min. Operating Temp.±3 | 3 | 25±2 | 4 | Max. Operating Temp.±2 | 5 | 25±2 |
| Step | Temperature (°C) | | | | | | | | | | | | | | |
| 1 | 25±2 | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp.±3 | | | | | | | | | | | | | | |
| 3 | 25±2 | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp.±2 | | | | | | | | | | | | | | |
| 5 | 25±2 | | | | | | | | | | | | | | |
| 9 | Discharge Test (Application: Nominal Capacitance C<10,000pF) | Appearance | No defects or abnormalities As in Fig., discharge is made 50 times at 5 sec. intervals from the capacitor (Cd) charged at DC voltage of specified.  Ct: Capacitor under test Cd: 0.001μF R1: 1,000Ω R2: 100MΩ R3: Surge resistance | | | | | | | | | | | | |
| 10 | Adhesive Strength of Termination | No removal of the terminations or other defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.  Fig. 1 | | | | | | | | | | | | |
| 11 | Vibration Resistance | Appearance | No defects or abnormalities | | | | | | | | | | | | |
| | | Capacitance | Within the specified tolerance | | | | | | | | | | | | |
| | D.F. | 0.025 max. | Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.).  | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. 

Specifications and Test Methods

Continued from the preceding page.
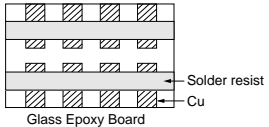
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | |
|---|------------------------------|---|--|--------------------|------------------------|-------------|------|------------|--------|-------------------|---|------------------------------|---|------------|--------|-----|-----|---------|-----|-----|-----|---------|-----|
| 12 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | |
| | |  <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">L×W (mm)</th> <th colspan="4">Dimension (mm)</th> </tr> <tr> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>4.5×2.0</td> <td>3.5</td> <td>7.0</td> <td>2.4</td> <td rowspan="3" style="text-align: center;">1.0</td> </tr> <tr> <td>4.5×3.2</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>5.7×5.0</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> | | L×W (mm) | Dimension (mm) | | | | a | b | c | d | 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 | 4.5×3.2 | 3.5 | 7.0 | 3.7 | 5.7×5.0 | 4.5 |
| L×W (mm) | Dimension (mm) | | | | | | | | | | | | | | | | | | | | | | |
| | a | b | c | d | | | | | | | | | | | | | | | | | | | |
| 4.5×2.0 | 3.5 | 7.0 | 2.4 | 1.0 | | | | | | | | | | | | | | | | | | | |
| 4.5×3.2 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | |
| 5.7×5.0 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | |
| 13 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | | | | | |
| 14 | Humidity Insulation | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Appearance</td><td>No marking defects</td></tr> <tr><td>Capacitance Change</td><td>Within ±15%</td></tr> <tr><td>D.F.</td><td>0.05 max.</td></tr> <tr><td>I.R.</td><td>More than 1,000MΩ</td></tr> <tr><td>Dielectric Strength</td><td>In accordance with item No.4</td></tr> </table> | Appearance | No marking defects | Capacitance Change | Within ±15% | D.F. | 0.05 max. | I.R. | More than 1,000MΩ | Dielectric Strength | In accordance with item No.4 | The capacitor should be subjected to 40±2°C, relative humidity of 90 to 98% for 8 hrs., and then removed in room condition* for 16 hrs. until 5 cycles. | | | | | | | | | | |
| Appearance | No marking defects | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | | | | | | | |
| D.F. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Resistance to Soldering Heat | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Appearance</td><td>No marking defects</td></tr> <tr><td>Capacitance Change</td><td>Within ±10%</td></tr> <tr><td>D.F.</td><td>0.025 max.</td></tr> <tr><td>I.R.</td><td>More than 2,000MΩ</td></tr> <tr><td>Dielectric Strength</td><td>In accordance with item No.4</td></tr> </table> | Appearance | No marking defects | Capacitance Change | Within ±10% | D.F. | 0.025 max. | I.R. | More than 2,000MΩ | Dielectric Strength | In accordance with item No.4 | Preheat the capacitor as table. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition* for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s •Pretreatment Perform a heat treatment at 150±18°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*. *Preheating | | | | | | | | | | |
| Appearance | No marking defects | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±10% | | | | | | | | | | | | | | | | | | | | | | |
| D.F. | 0.025 max. | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | More than 2,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | |
| 16 | Temperature Cycle | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Appearance</td><td>No marking defects</td></tr> <tr><td>Capacitance Change</td><td>Within ±15%</td></tr> <tr><td>D.F.</td><td>0.05 max.</td></tr> <tr><td>I.R.</td><td>More than 2,000MΩ</td></tr> </table> | Appearance | No marking defects | Capacitance Change | Within ±15% | D.F. | 0.05 max. | I.R. | More than 2,000MΩ | Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4. Perform the 5 cycles according to the 4 heat treatments listed in the following table. Let sit for 24±2 hrs. at room condition*, then measure. | | | | | | | | | | | | |
| | | Appearance | No marking defects | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±15% | | | | | | | | | | | | | | | | | | | | | | |
| D.F. | 0.05 max. | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | More than 2,000MΩ | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Operating Temp.±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> <tr> <td>3</td> <td>Max. Operating Temp.±2</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> </tbody> </table> <p>•Pretreatment Perform a heat treatment at 150±18°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*.</p> | Step | Temperature (°C) | Time (min.) | 1 | Min. Operating Temp.±3 | 30±3 | 2 | Room Temp. | 2 to 3 | 3 | Max. Operating Temp.±2 | 30±3 | 4 | Room Temp. | 2 to 3 | | | | | | | | |
| Step | Temperature (°C) | Time (min.) | | | | | | | | | | | | | | | | | | | | | |
| 1 | Min. Operating Temp.±3 | 30±3 | | | | | | | | | | | | | | | | | | | | | |
| 2 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | | | | | | |
| 3 | Max. Operating Temp.±2 | 30±3 | | | | | | | | | | | | | | | | | | | | | |
| 4 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | | | | | | |
| | |  <p style="text-align: center;">Fig. 4</p> | | | | | | | | | | | | | | | | | | | | | |

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. ↗

Specifications and Test Methods

Continued from the preceding page.

| No. | Item | Specifications | Test Method | | | | | | | | | |
|--------------------------|-------------------------|---------------------|---|---------------------|-----------|--------------|--------------------------|---------------------|-----------------|-----------------------|---------------------|-------------------|
| 17 | Humidity (Steady State) | Appearance | No marking defects | | | | | | | | | |
| | | Capacitance Change | Within $\pm 15\%$ | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | |
| | | I.R. | More than 1,000M Ω | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | |
| | | | Let the capacitor sit at 40 $\pm 2^\circ\text{C}$ and relative humidity of 90 to 95% for 500 ± 24 hrs. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. •Pretreatment Perform a heat treatment at 150 $\pm 1.8^\circ\text{C}$ for 60 ± 5 min. and then let sit for 24 ± 2 hrs. at room condition*. | | | | | | | | | |
| 18 | Life | Appearance | No marking defects | | | | | | | | | |
| | | Capacitance Change | Within $\pm 20\%$ | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | |
| | | I.R. | More than 1,000M Ω | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | |
| | | | Apply voltage and time as Table at maximum operating temperature $\pm 3^\circ\text{C}$. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. The charge / discharge current is less than 50mA. <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Nominal Capacitance</th> <th>Test Time</th> <th>Test Voltage</th> </tr> </thead> <tbody> <tr> <td>$C \geq 10,000\text{pF}$</td> <td>1,000± 48 hrs.</td> <td>AC300V (r.m.s.)</td> </tr> <tr> <td>$C < 10,000\text{pF}$</td> <td>1,500± 48 hrs.</td> <td>AC500V (r.m.s.) *</td> </tr> </tbody> </table> * Except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. | Nominal Capacitance | Test Time | Test Voltage | $C \geq 10,000\text{pF}$ | 1,000 ± 48 hrs. | AC300V (r.m.s.) | $C < 10,000\text{pF}$ | 1,500 ± 48 hrs. | AC500V (r.m.s.) * |
| Nominal Capacitance | Test Time | Test Voltage | | | | | | | | | | |
| $C \geq 10,000\text{pF}$ | 1,000 ± 48 hrs. | AC300V (r.m.s.) | | | | | | | | | | |
| $C < 10,000\text{pF}$ | 1,500 ± 48 hrs. | AC500V (r.m.s.) * | | | | | | | | | | |
| 19 | Humidity Loading | Appearance | No marking defects | | | | | | | | | |
| | | Capacitance Change | Within $\pm 15\%$ | | | | | | | | | |
| | | D.F. | 0.05 max. | | | | | | | | | |
| | | I.R. | More than 1,000M Ω | | | | | | | | | |
| | | Dielectric Strength | In accordance with item No.4 | | | | | | | | | |
| | | | Apply the rated voltage at 40 $\pm 2^\circ\text{C}$ and relative humidity of 90 to 95% for 500 ± 24 hrs. Remove and let sit for 24 ± 2 hrs. at room condition*, then measure. •Pretreatment Apply test voltage for 60 ± 5 min. at test temperature. Remove and let sit for 24 ± 2 hrs. at room condition*. | | | | | | | | | |

* "Room condition" Temperature: 15 to 35 $^\circ\text{C}$, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


Chip Monolithic Ceramic Capacitors



Safety Standard Certified Type GC (UL, IEC60384-14 Class X1/Y2)

■ Features

1. Chip monolithic ceramic capacitor (certified as conforming to safety standards) for AC lines.
2. A new monolithic structure for small, high capacitance capable of operating at high voltage levels.
3. Compared to lead type capacitors, this new capacitor is greatly downsized and low-profiled to 1/10 or less in volume, and 1/4 or less in height.
4. The type GC can be used as an X1-class and Y2-class capacitor, line-by-pass capacitor of UL1414.
5. +125 degree C guaranteed
6. Only for reflow soldering

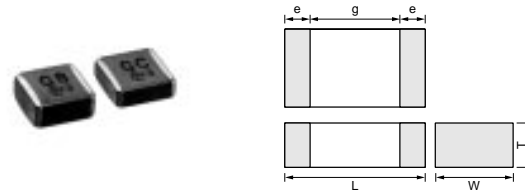

| Part Number | Dimensions (mm) | | | | |
|---------------|-----------------|----------|----------|--------|--------|
| | L | W | T | e min. | g min. |
| GA355D | 5.7 ±0.4 | 5.0 ±0.4 | 2.0 ±0.3 | 0.3 | 4.0 |

■ Applications

1. Ideal for use as Y capacitor or X capacitor for various switching power supplies
2. Ideal for modem applications

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

■ Standard Certification

| | Standard No. | Class | Rated Voltage |
|-------|--|--------------|--------------------|
| UL | UL1414 | Line By-pass | AC250V (r.m.s.) |
| VDE | IEC 60384-14 EN 60384-14 | X1, Y2 | |
| BSI | EN 60065 (14.2) IEC 60384-14 EN 60384-14 | | |
| SEMKO | IEC 60384-14 EN 60384-14 | | |
| ESTI | EN 60065 IEC 60384-14 | | |

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|---------------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GA355DR7GC101KY02L | AC250 (r.m.s.) | X7R (EIA) | 100 ±10% | 5.7 | 5.0 | 2.0 | 4.0 | 0.3 min. |
| GA355DR7GC151KY02L | AC250 (r.m.s.) | X7R (EIA) | 150 ±10% | 5.7 | 5.0 | 2.0 | 4.0 | 0.3 min. |
| GA355DR7GC221KY02L | AC250 (r.m.s.) | X7R (EIA) | 220 ±10% | 5.7 | 5.0 | 2.0 | 4.0 | 0.3 min. |
| GA355DR7GC331KY02L | AC250 (r.m.s.) | X7R (EIA) | 330 ±10% | 5.7 | 5.0 | 2.0 | 4.0 | 0.3 min. |


Chip Monolithic Ceramic Capacitors



Safety Standard Certified Type GD (IEC60384-14 Class Y3)

■ Features

1. Available for equipment based on IEC/EN60950 and UL1950
2. The type GD can be used as a Y3-class capacitor.
3. A new monolithic structure for small, high capacitance capable of operating at high voltage levels
4. +125 degree C guaranteed
5. Only for reflow soldering
6. The low-profile type (thickness: 1.5mm max.) is available. Fit for use on thinner type equipment.

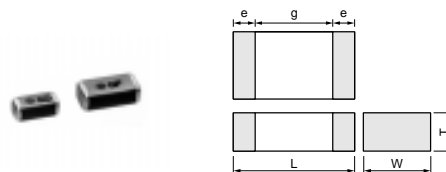

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|----------|--------------|--------|--------|
| | L | W | T | e min. | g min. |
| GA342A | 4.5 ±0.3 | 2.0 ±0.2 | 1.0 +0, -0.3 | 0.3 | 2.5 |
| GA342D | | | 2.0 ±0.3 | | |
| GA342Q | | | 1.5 +0, -0.3 | | |
| GA343D | 4.5 ±0.4 | 3.2 ±0.3 | 2.0 +0, -0.3 | | |
| GA343Q | | | 1.5 +0, -0.3 | | |

■ Applications

1. Ideal for use on line filters and couplings for DAA modems without transformers
2. Ideal for use on line filters for information equipment

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

■ Standard Certification

| | Standard No. | Class | Rated Voltage |
|-------|-----------------------------|-------|----------------|
| UL | UL 60950-1 | Y3 | AC250V(r.m.s.) |
| SEMKO | IEC 60384-14 EN 60384-14 | | |

| Applications | | |
|---------------------|--------------------------|---|
| Size | Switching power supplies | Communication network devices such as a modem |
| 4.5x3.2mm and under | — | ⊙ |

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GA342D1XGD100JY02L | AC250 (r.m.s.) | SL (JIS) | 10 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGD120JY02L | AC250 (r.m.s.) | SL (JIS) | 12 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGD150JY02L | AC250 (r.m.s.) | SL (JIS) | 15 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGD180JY02L | AC250 (r.m.s.) | SL (JIS) | 18 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGD220JY02L | AC250 (r.m.s.) | SL (JIS) | 22 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342A1XGD270JW31L | AC250 (r.m.s.) | SL (JIS) | 27 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD330JW31L | AC250 (r.m.s.) | SL (JIS) | 33 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD390JW31L | AC250 (r.m.s.) | SL (JIS) | 39 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD470JW31L | AC250 (r.m.s.) | SL (JIS) | 47 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD560JW31L | AC250 (r.m.s.) | SL (JIS) | 56 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD680JW31L | AC250 (r.m.s.) | SL (JIS) | 68 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGD820JW31L | AC250 (r.m.s.) | SL (JIS) | 82 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342QR7GD101KW01L | AC250 (r.m.s.) | X7R (EIA) | 100 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD151KW01L | AC250 (r.m.s.) | X7R (EIA) | 150 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD221KW01L | AC250 (r.m.s.) | X7R (EIA) | 220 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD331KW01L | AC250 (r.m.s.) | X7R (EIA) | 330 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD471KW01L | AC250 (r.m.s.) | X7R (EIA) | 470 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD681KW01L | AC250 (r.m.s.) | X7R (EIA) | 680 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD102KW01L | AC250 (r.m.s.) | X7R (EIA) | 1000 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GD152KW01L | AC250 (r.m.s.) | X7R (EIA) | 1500 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA343QR7GD182KW01L | AC250 (r.m.s.) | X7R (EIA) | 1800 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA343QR7GD222KW01L | AC250 (r.m.s.) | X7R (EIA) | 2200 ±10% | 4.5 | 3.2 | 1.5 | 2.5 | 0.3 min. |
| GA343DR7GD472KW01L | AC250 (r.m.s.) | X7R (EIA) | 4700 ±10% | 4.5 | 3.2 | 2.0 | 2.5 | 0.3 min. |

Chip Monolithic Ceramic Capacitors



Safety Standard Certified Type GF (IEC60384-14 Class Y2, X1/Y2)


■ Features

1. Available for equipment based on IEC/EN60950 and UL1950. Besides, the GA352/355 types are available for equipment based on IEC/EN60065, UL1492, and UL6500
2. The type GF can be used as a Y2-class capacitor.
3. A new monolithic structure for small, high capacitance capable of operating at high voltage levels
4. +125 degree C guaranteed
5. Only for reflow soldering
6. The low-profile type (thickness: 1.5mm max.) is available. Fit for use on thinner type equipment.

■ Applications

1. Ideal for use on line filters and couplings for DAA modems without transformers
2. Ideal for use on line filters for information equipment
3. Ideal for use as Y capacitor or X capacitor for various switching power supplies (GA352/355 types only)

Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

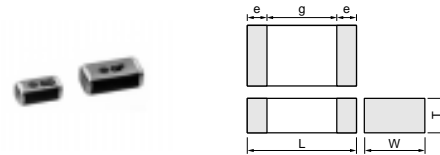

| Part Number | Dimensions (mm) | | | e min. | g min. | | |
|-------------|-----------------|----------|--------------|--------|--------|--------------|-----|
| | L | W | T | | | | |
| GA342A | 4.5 ±0.3 | 2.0 ±0.2 | 1.0 +0, -0.3 | 0.3 | 2.5 | | |
| GA342D | | | 2.0 ±0.2* | | | | |
| GA342Q | | | 1.5 +0, -0.3 | | | | |
| GA352Q | 5.7 ±0.4 | 5.0 ±0.4 | 2.8 ±0.3 | | | 1.5 +0, -0.3 | 4.0 |
| GA355D | | | 2.0 +0, -0.3 | | | | |
| GA355Q | | | 1.5 +0, -0.3 | | | | |

* GA342D1X : 2.0±0.3

■ Standard Certification

| | Standard No. | Class | Status of Certification | | Rated Voltage |
|-------|--------------|--------|-------------------------|---------------------------|--------------------|
| | | | Size : 4.5x2.0mm | Size : 5.7x2.8mm and over | |
| UL | UL1414 | X1, Y2 | — | ⊙ | AC250V (r.m.s.) |
| | UL 60950-1 | — | ⊙ | — | |
| VDE | IEC 60384-14 | X1, Y2 | — | ⊙ | (r.m.s.) |
| SEMKO | EN 60384-14 | Y2 | ⊙ | ⊙ | |

Applications

| Size | Switching power supplies | Communication network devices such as a modem |
|--------------------|--------------------------|---|
| 4.5x2.0mm | — | ⊙ |
| 5.7x2.8mm and over | ⊙ | ⊙ |

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GA342D1XGF100JY02L | AC250 (r.m.s.) | SL (JIS) | 10 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGF120JY02L | AC250 (r.m.s.) | SL (JIS) | 12 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGF150JY02L | AC250 (r.m.s.) | SL (JIS) | 15 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGF180JY02L | AC250 (r.m.s.) | SL (JIS) | 18 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342D1XGF220JY02L | AC250 (r.m.s.) | SL (JIS) | 22 ±5% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342A1XGF270JW31L | AC250 (r.m.s.) | SL (JIS) | 27 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF330JW31L | AC250 (r.m.s.) | SL (JIS) | 33 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF390JW31L | AC250 (r.m.s.) | SL (JIS) | 39 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF470JW31L | AC250 (r.m.s.) | SL (JIS) | 47 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF560JW31L | AC250 (r.m.s.) | SL (JIS) | 56 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF680JW31L | AC250 (r.m.s.) | SL (JIS) | 68 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342A1XGF820JW31L | AC250 (r.m.s.) | SL (JIS) | 82 ±5% | 4.5 | 2.0 | 1.0 | 2.5 | 0.3 min. |
| GA342QR7GF101KW01L | AC250 (r.m.s.) | X7R (EIA) | 100 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342QR7GF151KW01L | AC250 (r.m.s.) | X7R (EIA) | 150 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA342DR7GF221KW02L | AC250 (r.m.s.) | X7R (EIA) | 220 ±10% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342DR7GF331KW02L | AC250 (r.m.s.) | X7R (EIA) | 330 ±10% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA342QR7GF471KW01L | AC250 (r.m.s.) | X7R (EIA) | 470 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |
| GA352QR7GF471KW01L | AC250 (r.m.s.) | X7R (EIA) | 470 ±10% | 5.7 | 2.8 | 1.5 | 4.0 | 0.3 min. |
| GA342QR7GF681KW01L | AC250 (r.m.s.) | X7R (EIA) | 680 ±10% | 4.5 | 2.0 | 1.5 | 2.5 | 0.3 min. |

Continued on the following page.

Continued from the preceding page.

| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|---------------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GA352QR7GF681KW01L | AC250 (r.m.s.) | X7R (EIA) | 680 ±10% | 5.7 | 2.8 | 1.5 | 4.0 | 0.3 min. |
| GA342DR7GF102KW02L | AC250 (r.m.s.) | X7R (EIA) | 1000 ±10% | 4.5 | 2.0 | 2.0 | 2.5 | 0.3 min. |
| GA352QR7GF102KW01L | AC250 (r.m.s.) | X7R (EIA) | 1000 ±10% | 5.7 | 2.8 | 1.5 | 4.0 | 0.3 min. |
| GA352QR7GF152KW01L | AC250 (r.m.s.) | X7R (EIA) | 1500 ±10% | 5.7 | 2.8 | 1.5 | 4.0 | 0.3 min. |
| GA355QR7GF182KW01L | AC250 (r.m.s.) | X7R (EIA) | 1800 ±10% | 5.7 | 5.0 | 1.5 | 4.0 | 0.3 min. |
| GA355QR7GF222KW01L | AC250 (r.m.s.) | X7R (EIA) | 2200 ±10% | 5.7 | 5.0 | 1.5 | 4.0 | 0.3 min. |
| GA355QR7GF332KW01L | AC250 (r.m.s.) | X7R (EIA) | 3300 ±10% | 5.7 | 5.0 | 1.5 | 4.0 | 0.3 min. |
| GA355DR7GF472KW01L | AC250 (r.m.s.) | X7R (EIA) | 4700 ±10% | 5.7 | 5.0 | 2.0 | 4.0 | 0.3 min. |


Chip Monolithic Ceramic Capacitors



Safety Standard Certified Type GB (IEC60384-14 Class X2)

■ Features

1. The type GB can be used as an X2-class capacitor.
2. Chip monolithic ceramic capacitor (certified as conforming to safety standards) for AC lines
3. A new monolithic structure for small, high capacitance capable of operating at high voltage levels
4. Compared to lead type capacitors, this new capacitor is greatly downsized and low-profiled to 1/10 or less in volume, and 1/4 or less in height.
5. +125 degree C guaranteed
6. Only for reflow soldering

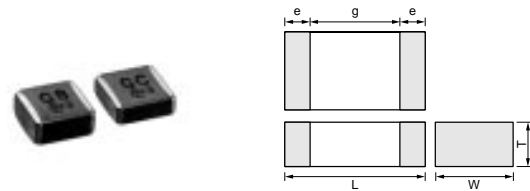

| Part Number | Dimensions (mm) | | | | |
|-------------|-----------------|----------|-------------|--------|--------|
| | L | W | T | e min. | g min. |
| GA355Q | 5.7 ±0.4 | 5.0 ±0.4 | 1.5 +0,-0.3 | 0.3 | 3.0 |
| GA355D | | | 2.0 +0,-0.3 | | |
| GA355E | | | 2.5 +0,-0.3 | | |
| GA355X | | | 2.9 +0,-0.4 | | |

■ Applications

Ideal for use as X capacitor for various switching power supplies



Do not use these products in any Automotive Power train or Safety equipment including Battery charger for Electric Vehicles and Plug-in Hybrid. Only Murata products clearly stipulated as "for Automotive use" on its catalog can be used for automobile applications such as Power train and Safety equipment.

■ Standard Certification

| | Standard No. | Class | Rated Voltage |
|-------|-----------------------------|-------|--------------------|
| VDE | IEC 60384-14 EN 60384-14 | X2 | AC250V (r.m.s.) |
| SEMKO | | | |
| ESTI | | | |


| Part Number | Rated Voltage (V) | TC Code (Standard) | Capacitance (pF) | Length L (mm) | Width W (mm) | Thickness T (mm) | Electrode g min. (mm) | Electrode e (mm) |
|--------------------|-------------------|--------------------|------------------|---------------|--------------|------------------|-----------------------|------------------|
| GA355QR7GB103KW01L | AC250 (r.m.s.) | X7R (EIA) | 10000 ±10% | 5.7 | 5.0 | 1.5 | 3.0 | 0.3 min. |
| GA355QR7GB153KW01L | AC250 (r.m.s.) | X7R (EIA) | 15000 ±10% | 5.7 | 5.0 | 1.5 | 3.0 | 0.3 min. |
| GA355DR7GB223KW01L | AC250 (r.m.s.) | X7R (EIA) | 22000 ±10% | 5.7 | 5.0 | 2.0 | 3.0 | 0.3 min. |
| GA355ER7GB333KW01L | AC250 (r.m.s.) | X7R (EIA) | 33000 ±10% | 5.7 | 5.0 | 2.5 | 3.0 | 0.3 min. |
| GA355ER7GB473KW01L | AC250 (r.m.s.) | X7R (EIA) | 47000 ±10% | 5.7 | 5.0 | 2.5 | 3.0 | 0.3 min. |
| GA355XR7GB563KW06L | AC250 (r.m.s.) | X7R (EIA) | 56000 ±10% | 5.7 | 5.0 | 2.9 | 3.0 | 0.3 min. |

GA3 Series Specifications and Test Methods
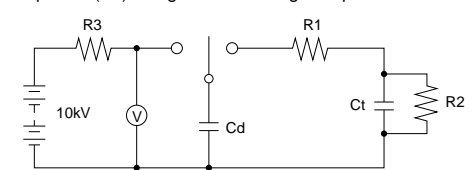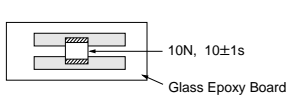
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | |
|---------------|--|---|--|--------------------|--------------|--------------|---------|---|--|---------------------|--|------|------------------|---|--------------------------|---|-------------------------|---|--------------------------|---|-------------------------|---|--------------------------|
| 1 | Operating Temperature Range | -55 to +125°C | — | | | | | | | | | | | | | | | | | | | | |
| 2 | Appearance | No defects or abnormalities | Visual inspection | | | | | | | | | | | | | | | | | | | | |
| 3 | Dimensions | Within the specified dimensions | Using calipers | | | | | | | | | | | | | | | | | | | | |
| 4 | Dielectric Strength | No defects or abnormalities | No failure should be observed when voltage in table is applied between the terminations for 60±1 sec., provided the charge/discharge current is less than 50mA. <table border="1"> <thead> <tr> <th></th> <th>Test Voltage</th> </tr> </thead> <tbody> <tr> <td>Type GB</td> <td>DC1075V</td> </tr> <tr> <td>Type GC/GD/GF</td> <td>AC1500V (r.m.s.)</td> </tr> </tbody> </table> | | Test Voltage | Type GB | DC1075V | Type GC/GD/GF | AC1500V (r.m.s.) | | | | | | | | | | | | | | |
| | Test Voltage | | | | | | | | | | | | | | | | | | | | | | |
| Type GB | DC1075V | | | | | | | | | | | | | | | | | | | | | | |
| Type GC/GD/GF | AC1500V (r.m.s.) | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Pulse Voltage (Application: Type GD/GF) | No self healing breakdowns or flash-overs have taken place in the capacitor. | 10 impulse of alternating polarity is subjected. (5 impulse for each polarity) The interval between impulse is 60 sec. Applied Voltage: 2.5kV zero to peak | | | | | | | | | | | | | | | | | | | | |
| 6 | Insulation Resistance (I.R.) | More than 6,000MΩ | The insulation resistance should be measured with DC500±50V and within 60±5 sec. of charging. | | | | | | | | | | | | | | | | | | | | |
| 7 | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | | | | | | | |
| 8 | Dissipation Factor (D.F.) Q | <table border="1"> <thead> <tr> <th>Char.</th> <th>Specification</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>D.F. ≤ 0.025</td> </tr> <tr> <td>SL</td> <td>Q ≥ 400+20C*2 (C < 30pF) Q ≥ 1000 (C ≥ 30pF)</td> </tr> </tbody> </table> | Char. | Specification | X7R | D.F. ≤ 0.025 | SL | Q ≥ 400+20C*2 (C < 30pF) Q ≥ 1000 (C ≥ 30pF) | The capacitance/Q/D.F. should be measured at a frequency of 1±0.2kHz (SL char.: 1±0.2MHz) and a voltage of AC1±0.2V (r.m.s.) | | | | | | | | | | | | | | |
| Char. | Specification | | | | | | | | | | | | | | | | | | | | | | |
| X7R | D.F. ≤ 0.025 | | | | | | | | | | | | | | | | | | | | | | |
| SL | Q ≥ 400+20C*2 (C < 30pF) Q ≥ 1000 (C ≥ 30pF) | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Capacitance Temperature Characteristics | <table border="1"> <thead> <tr> <th>Char.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> </tbody> </table> Temperature characteristic guarantee is -55 to +125°C <table border="1"> <thead> <tr> <th>Char.</th> <th>Temperature Coefficient</th> </tr> </thead> <tbody> <tr> <td>SL</td> <td>+350 to -1000ppm/°C</td> </tr> </tbody> </table> Temperature characteristic guarantee is +20 to +85°C | Char. | Capacitance Change | X7R | Within ±15% | Char. | Temperature Coefficient | SL | +350 to -1000ppm/°C | The capacitance measurement should be made at each step specified in Table. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25±2 (20±2 for SL char.)</td> </tr> <tr> <td>2</td> <td>Min. Operating Temp. ±3</td> </tr> <tr> <td>3</td> <td>25±2 (20±2 for SL char.)</td> </tr> <tr> <td>4</td> <td>Max. Operating Temp. ±2</td> </tr> <tr> <td>5</td> <td>25±2 (20±2 for SL char.)</td> </tr> </tbody> </table> SL char. : The capacitance should be measured at even 85°C between step 3 and step 4. •Pretreatment for X7R char. Perform a heat treatment at 150±3°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1. | Step | Temperature (°C) | 1 | 25±2 (20±2 for SL char.) | 2 | Min. Operating Temp. ±3 | 3 | 25±2 (20±2 for SL char.) | 4 | Max. Operating Temp. ±2 | 5 | 25±2 (20±2 for SL char.) |
| Char. | Capacitance Change | | | | | | | | | | | | | | | | | | | | | | |
| X7R | Within ±15% | | | | | | | | | | | | | | | | | | | | | | |
| Char. | Temperature Coefficient | | | | | | | | | | | | | | | | | | | | | | |
| SL | +350 to -1000ppm/°C | | | | | | | | | | | | | | | | | | | | | | |
| Step | Temperature (°C) | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 25±2 (20±2 for SL char.) | | | | | | | | | | | | | | | | | | | | | | |
| 2 | Min. Operating Temp. ±3 | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 25±2 (20±2 for SL char.) | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Max. Operating Temp. ±2 | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 25±2 (20±2 for SL char.) | | | | | | | | | | | | | | | | | | | | | | |
| 10 | Discharge Test (Application: Type GC) Appearance I.R. Dielectric Strength | Appearance: No defects or abnormalities I.R.: More than 1,000MΩ Dielectric Strength: In accordance with item No.4 | As in Fig., discharge is made 50 times at 5 sec. intervals from the capacitor (Cd) charged at DC voltage of specified.  Ct: Capacitor under test Cd: 0.001μF R1: 1,000Ω R2: 100MΩ R3: Surge resistance | | | | | | | | | | | | | | | | | | | | |
| 11 | Adhesive Strength of Termination | No removal of the terminations or other defect should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 1. Then apply 10N force in the direction of the arrow. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock.  Fig. 1 | | | | | | | | | | | | | | | | | | | | |




*1 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

*2 "C" expresses nominal capacitance value (pF).

Continued on the following page. 

GA3 Series Specifications and Test Methods

Continued from the preceding page.
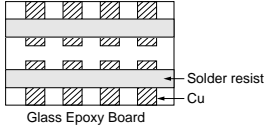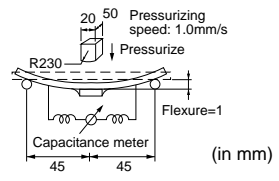
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|---|--|---|---------------|--------------------|--------------|-------------|---|---|---|--------------|--------|---------|-----|-----|-----|-----|---------|-----|-----|-----|---------|-----|-----|-----|---------|
| 12 | Appearance | No defects or abnormalities | Solder the capacitor to the test jig (glass epoxy board). The capacitor should be subjected to a simple harmonic motion having a total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55Hz. The frequency range, from 10 to 55Hz and return to 10Hz, should be traversed in approximately 1 min. This motion should be applied for a period of 2 hrs. in each of 3 mutually perpendicular directions (total of 6 hrs.). | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance | Within the specified tolerance | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | D.F. Q | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Char.</th> <th style="width: 80%;">Specification</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>D.F. ≤ 0.025</td> </tr> <tr> <td>SL</td> <td>Q ≥ 400 + 20C** (C < 30pF) Q ≥ 1000 (C ≥ 30pF)</td> </tr> </tbody> </table> | Char. | Specification | X7R | D.F. ≤ 0.025 | SL | Q ≥ 400 + 20C** (C < 30pF) Q ≥ 1000 (C ≥ 30pF) |  | | | | | | | | | | | | | | | | | |
| | | Char. | Specification | | | | | | | | | | | | | | | | | | | | | | | |
| X7R | D.F. ≤ 0.025 | | | | | | | | | | | | | | | | | | | | | | | | | |
| SL | Q ≥ 400 + 20C** (C < 30pF) Q ≥ 1000 (C ≥ 30pF) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | Deflection | No cracking or marking defects should occur. | Solder the capacitor to the testing jig (glass epoxy board) shown in Fig. 2. Then apply a force in the direction shown in Fig. 3. The soldering should be done using the reflow method and should be conducted with care so that the soldering is uniform and free of defects such as heat shock. | | | | | | | | | | | | | | | | | | | | | | | |
| | |  <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th rowspan="2">LxW (mm)</th> <th colspan="4">Dimension (mm)</th> </tr> <tr> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>4.5x2.0</td> <td>3.5</td> <td>7.0</td> <td>2.4</td> <td rowspan="4" style="text-align: center; vertical-align: middle;">1.0</td> </tr> <tr> <td>4.5x3.2</td> <td>3.5</td> <td>7.0</td> <td>3.7</td> </tr> <tr> <td>5.7x2.8</td> <td>4.5</td> <td>8.0</td> <td>3.2</td> </tr> <tr> <td>5.7x5.0</td> <td>4.5</td> <td>8.0</td> <td>5.6</td> </tr> </tbody> </table> <p style="text-align: center;">Fig. 2</p> | | LxW (mm) | Dimension (mm) | | | | a | b | c | d | 4.5x2.0 | 3.5 | 7.0 | 2.4 | 1.0 | 4.5x3.2 | 3.5 | 7.0 | 3.7 | 5.7x2.8 | 4.5 | 8.0 | 3.2 | 5.7x5.0 |
| LxW (mm) | Dimension (mm) | | | | | | | | | | | | | | | | | | | | | | | | | |
| | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | |
| 4.5x2.0 | 3.5 | 7.0 | 2.4 | 1.0 | | | | | | | | | | | | | | | | | | | | | | |
| 4.5x3.2 | 3.5 | 7.0 | 3.7 | | | | | | | | | | | | | | | | | | | | | | | |
| 5.7x2.8 | 4.5 | 8.0 | 3.2 | | | | | | | | | | | | | | | | | | | | | | | |
| 5.7x5.0 | 4.5 | 8.0 | 5.6 | | | | | | | | | | | | | | | | | | | | | | | |
| | | |  <p style="text-align: center;">Fig. 3</p> | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | Solderability of Termination | 75% of the terminations are to be soldered evenly and continuously. | Immerse the capacitor in a solution of ethanol (JIS-K-8101) and rosin (JIS-K-5902) (25% rosin in weight proportion). Immerse in solder solution for 2±0.5 sec. Immersing speed: 25±2.5mm/s Temp. of solder: 245±5°C Lead Free Solder (Sn-3.0Ag-0.5Cu) 235±5°C H60A or H63A Eutectic Solder | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | Appearance | No marking defects | Preheat the capacitor as table. Immerse the capacitor in solder solution at 260±5°C for 10±1 sec. Let sit at room condition*1 for 24±2 hrs., then measure. •Immersing speed: 25±2.5mm/s •Pretreatment for X7R char. Perform a heat treatment at 150±10°C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1. *Preheating | | | | | | | | | | | | | | | | | | | | | | | |
| | Capacitance Change | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Char.</th> <th style="width: 80%;">Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>Within ±10%</td> </tr> <tr> <td>SL</td> <td>Within ±2.5% or ±0.25pF (Whichever is larger)</td> </tr> </tbody> </table> | | Char. | Capacitance Change | X7R | Within ±10% | SL | Within ±2.5% or ±0.25pF (Whichever is larger) | | | | | | | | | | | | | | | | | |
| | Char. | Capacitance Change | | | | | | | | | | | | | | | | | | | | | | | | |
| | X7R | Within ±10% | | | | | | | | | | | | | | | | | | | | | | | | |
| SL | Within ±2.5% or ±0.25pF (Whichever is larger) | | | | | | | | | | | | | | | | | | | | | | | | | |
| I.R. | More than 1,000MΩ | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Step</th> <th style="width: 55%;">Temperature</th> <th style="width: 30%;">Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>100 to 120°C</td> <td>1 min.</td> </tr> <tr> <td>2</td> <td>170 to 200°C</td> <td>1 min.</td> </tr> </tbody> </table> | Step | Temperature | Time | 1 | 100 to 120°C | 1 min. | 2 | 170 to 200°C | 1 min. | | | | | | | | | | | | | | |
| Step | Temperature | Time | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 100 to 120°C | 1 min. | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 170 to 200°C | 1 min. | | | | | | | | | | | | | | | | | | | | | | | | |



*1 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

*2 "C" expresses nominal capacitance value (pF).

Continued on the following page. ↗


GA3 Series Specifications and Test Methods

Continued from the preceding page.
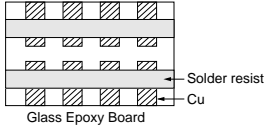
| No. | Item | Specifications | Test Method | | | | | | | | | | | | | | | |
|---------------------|--|--------------------|--|------|------------------|-------------|--|------------------------|--|----|------------|--------|---|------------------------|------|---|------------|--------|
| 16 | Temperature Cycle | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Char. X7R Capacitance Change Within ±15% | | | | | | | | | | | | | | | |
| | | | SL Within ±2.5% or ±0.25pF (Whichever is larger) | | | | | | | | | | | | | | | |
| | | D.F. Q | Char. X7R Specification D.F. ≤0.05 | | | | | | | | | | | | | | | |
| | | | SL Q ≥ 400+20C*2 (C < 30pF) Q ≥ 1000 (C ≥ 30pF) | | | | | | | | | | | | | | | |
| I.R. | More than 3,000MΩ | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | |
| 17 | Humidity (Steady State) | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Char. X7R Capacitance Change Within ±15% | | | | | | | | | | | | | | | |
| | | | SL Within ±5.0% or ±0.5pF (Whichever is larger) | | | | | | | | | | | | | | | |
| | | D.F. Q | Char. X7R Specification D.F. ≤0.05 | | | | | | | | | | | | | | | |
| | | | SL Q ≥ 275+5/2C*2 (C < 30pF) Q ≥ 350 (C ≥ 30pF) | | | | | | | | | | | | | | | |
| I.R. | More than 3,000MΩ | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | |
| 18 | Life | Appearance | No marking defects | | | | | | | | | | | | | | | |
| | | Capacitance Change | Char. X7R Capacitance Change Within ±20% | | | | | | | | | | | | | | | |
| | | | SL Within ±3.0% or ±0.3pF (Whichever is larger) | | | | | | | | | | | | | | | |
| | | D.F. Q | Char. X7R Specification D.F. ≤0.05 | | | | | | | | | | | | | | | |
| | | | SL Q ≥ 275+5/2C*2 (C < 30pF) Q ≥ 350 (C ≥ 30pF) | | | | | | | | | | | | | | | |
| I.R. | More than 3,000MΩ | | | | | | | | | | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | | | | | | | | | | |
| | | | <p>Fix the capacitor to the supporting jig (glass epoxy board) shown in Fig. 4.</p> <p>Perform the 5 cycles according to the 4 heat treatments listed in the following table.</p> <p>Let sit for 24±2 hrs. at room condition*1, then measure.</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Operating Temp.±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> <tr> <td>3</td> <td>Max. Operating Temp.±2</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>2 to 3</td> </tr> </tbody> </table> <p>•Pretreatment for X7R char. Perform a heat treatment at 150 ± 1 °C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1.</p>  <p>Fig. 4</p> | Step | Temperature (°C) | Time (min.) | 1 | Min. Operating Temp.±3 | 30±3 | 2 | Room Temp. | 2 to 3 | 3 | Max. Operating Temp.±2 | 30±3 | 4 | Room Temp. | 2 to 3 |
| Step | Temperature (°C) | Time (min.) | | | | | | | | | | | | | | | | |
| 1 | Min. Operating Temp.±3 | 30±3 | | | | | | | | | | | | | | | | |
| 2 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | |
| 3 | Max. Operating Temp.±2 | 30±3 | | | | | | | | | | | | | | | | |
| 4 | Room Temp. | 2 to 3 | | | | | | | | | | | | | | | | |
| | | | <p>Before this test, the test shown in the following is performed.</p> <ul style="list-style-type: none"> Item 11 Adhesive Strength of Termination (applied force is 5N) Item 13 Deflection <p>Let the capacitor sit at 40±2°C and relative humidity of 90 to 95% for 500 ± 24 hrs.</p> <p>Remove and let sit for 24±2 hrs. at room condition*1, then measure.</p> <p>•Pretreatment for X7R char. Perform a heat treatment at 150 ± 1 °C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1.</p> | | | | | | | | | | | | | | | |
| | | | <p>Before this test, the test shown in the following is performed.</p> <ul style="list-style-type: none"> Item 11 Adhesive Strength of Termination (apply force is 5N) Item 13 Deflection <p>Impulse Voltage</p> <p>Each individual capacitor should be subjected to a 2.5kV (Type GC/GF: 5kV) Impulse (the voltage value means zero to peak) for three times. Then the capacitors are applied to life test.</p>  <p>Front time (T1)=1.2μs=1.67T Time to half-value (T2)=50μs</p> <p>Apply voltage as Table for 1,000 hrs. at 125 ± 2 °C, relative humidity 50% max.</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Applied Voltage</th> </tr> </thead> <tbody> <tr> <td>GB</td> <td>AC312.5V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec.</td> </tr> <tr> <td>GC</td> <td rowspan="2">AC425V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec.</td> </tr> <tr> <td>GD</td> </tr> </tbody> </table> <p>Let sit for 24±2 hrs. at room condition*1, then measure.</p> <p>•Pretreatment for X7R char. Perform a heat treatment at 150 ± 1 °C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1.</p> | Type | Applied Voltage | GB | AC312.5V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec. | GC | AC425V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec. | GD | | | | | | | | |
| Type | Applied Voltage | | | | | | | | | | | | | | | | | |
| GB | AC312.5V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec. | | | | | | | | | | | | | | | | | |
| GC | AC425V (r.m.s.), except that once each hour the voltage is increased to AC1,000V (r.m.s.) for 0.1 sec. | | | | | | | | | | | | | | | | | |
| GD | | | | | | | | | | | | | | | | | | |



*1 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

*2 "C" expresses nominal capacitance value (pF).

Continued on the following page. 


GA3 Series Specifications and Test Methods

Continued from the preceding page.
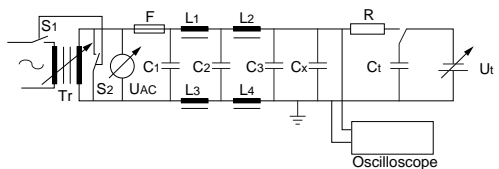
| No. | Item | Specifications | Test Method | | | | | | |
|---------------------|---|--|--|-------|--------------------|--------|---|--------|--|
| 19 | Appearance | No marking defects | Before this test, the test shown in the following is performed. -Item 11 Adhesive Strength of Termination (apply force is 5N) -Item 13 Deflection Apply the rated voltage at 40±2°C and relative humidity of 90 to 95% for 500 ^{±20} hrs. Remove and let sit for 24±2 hrs. at room condition*1, then measure. •Pretreatment for X7R char. Perform a heat treatment at 150 ^{±10} °C for 60±5 min. and then let sit for 24±2 hrs. at room condition*1. | | | | | | |
| | Capacitance Change | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e0e0e0;"> <th style="width: 30%;">Char.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>Within ±15%</td> </tr> <tr> <td>SL</td> <td>Within ±5.0% or ±0.5pF (Whichever is larger)</td> </tr> </tbody> </table> | | Char. | Capacitance Change | X7R | Within ±15% | SL | Within ±5.0% or ±0.5pF (Whichever is larger) |
| | Char. | Capacitance Change | | | | | | | |
| | X7R | Within ±15% | | | | | | | |
| | SL | Within ±5.0% or ±0.5pF (Whichever is larger) | | | | | | | |
| D.F. Q | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e0e0e0;"> <th style="width: 30%;">Char.</th> <th>Specification</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>D.F. ≤0.05</td> </tr> <tr> <td>SL</td> <td>Q ≥ 275+5/2C*2 (C<30pF) Q ≥ 350 (C ≥ 30pF)</td> </tr> </tbody> </table> | Char. | Specification | X7R | D.F. ≤0.05 | SL | Q ≥ 275+5/2C*2 (C<30pF) Q ≥ 350 (C ≥ 30pF) | | |
| Char. | Specification | | | | | | | | |
| X7R | D.F. ≤0.05 | | | | | | | | |
| SL | Q ≥ 275+5/2C*2 (C<30pF) Q ≥ 350 (C ≥ 30pF) | | | | | | | | |
| I.R. | More than 3,000MΩ | | | | | | | | |
| Dielectric Strength | In accordance with item No.4 | | | | | | | | |
| 20 | Active Flammability | The cheesecloth should not be on fire. | The capacitor should be individually wrapped in at least one but not more than two complete layers of cheesecloth. The capacitor should be subjected to 20 discharges. The interval between successive discharges should be 5 sec. The UAC should be maintained for 2 min. after the last discharge. | | | | | | |
| | | |  <p style="margin-left: 20px;"> C1,2 : 1μF±10% C3 : 0.033μF±5% 10kV L1 to 4 : 1.5mH±20% 16A Rod core choke Ct : 3μF±5% 10kV R : 100Ω±2% Cx : Capacitor under test UAC : UR±5% F : Fuse, Rated 16A UR : Rated Voltage Ut : Voltage applied to Ct </p>  <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <thead> <tr style="background-color: #e0e0e0;"> <th>Type</th> <th>Ui</th> </tr> </thead> <tbody> <tr> <td>GB, GD</td> <td>2.5kV</td> </tr> <tr> <td>GC, GF</td> <td>5kV</td> </tr> </tbody> </table> | Type | Ui | GB, GD | 2.5kV | GC, GF | 5kV |
| Type | Ui | | | | | | | | |
| GB, GD | 2.5kV | | | | | | | | |
| GC, GF | 5kV | | | | | | | | |
| 21 | Passive Flammability | The burning time should not exceed 30 sec. The tissue paper should not ignite. | The capacitor under test should be held in the flame in the position which best promotes burning. Each specimen should only be exposed once to the flame. Time of exposure to flame: 30 sec. | | | | | | |

*1 "Room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa


*2 "C" expresses nominal capacitance value (pF).

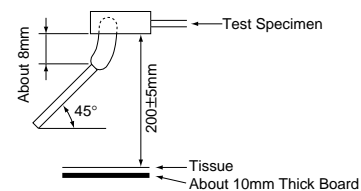


GRM/GR4/GR7/GA2/GA3 Series Data (Typical Example)

Capacitance - Temperature Characteristics


C0G/U2J/SL Characteristics

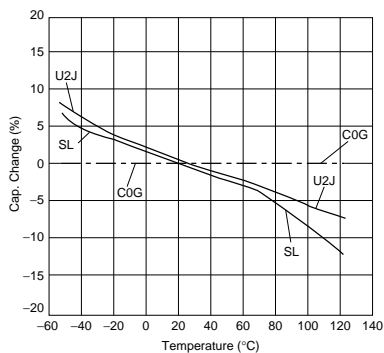

X7R Characteristics

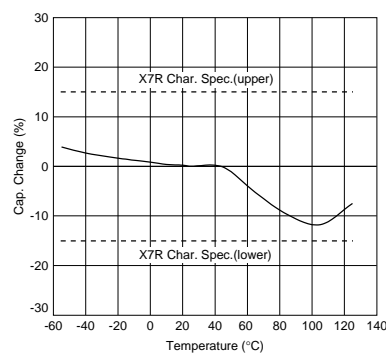


GR4 Series

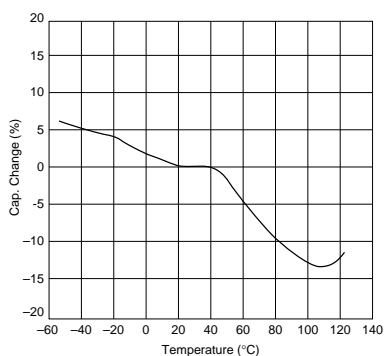


Impedance - Frequency Characteristics

GRM Series (C0G Char. 630V)

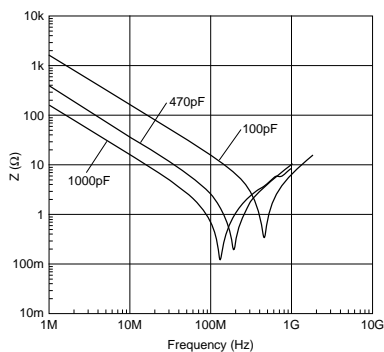

GRM Series (X7R Char. 250V)

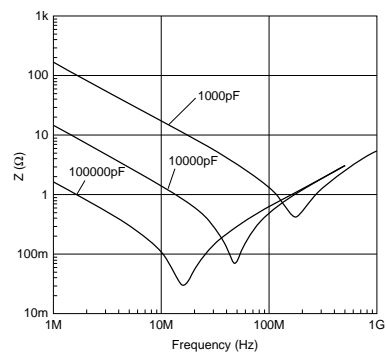


Continued on the following page. ↗

GRM/GR4/GR7/GA2/GA3 Series Data (Typical Example)


Continued from the preceding page.

Impedance - Frequency Characteristics


GRM Series (X7R Char. 630V)

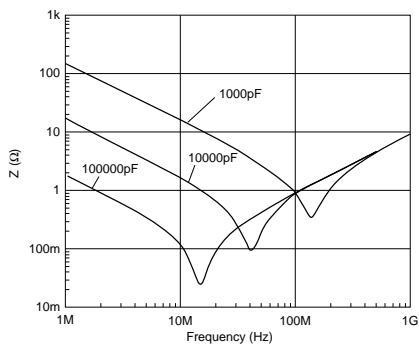


GR4 Series

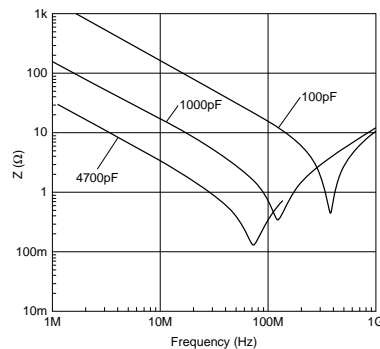


GR7 Series

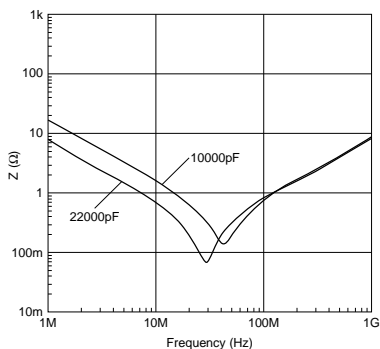


GA2 Series

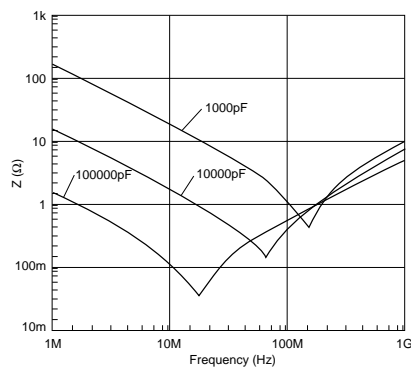

GA3 Series (Type GD)

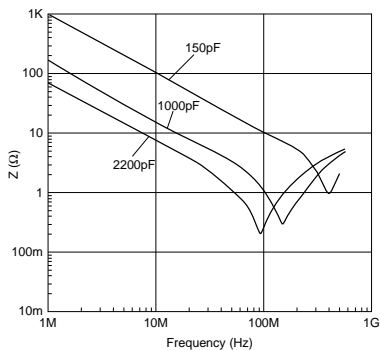

GA3 Series (Type GF)

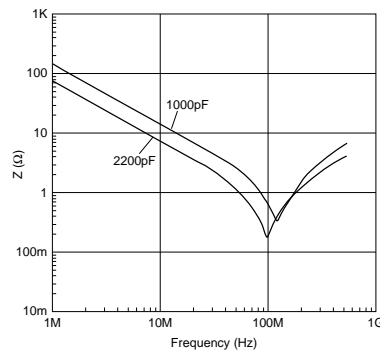


Continued on the following page. ↗



GRM/GR4/GR7/GA2/GA3 Series Data (Typical Example)

Continued from the preceding page.

Impedance - Frequency Characteristics

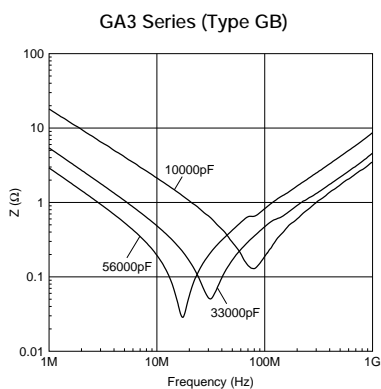

Capacitance - AC Voltage Characteristics

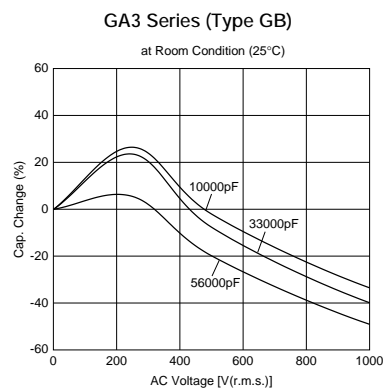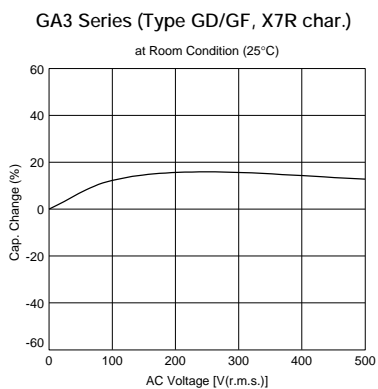

Package

Taping is standard packaging method.


■ Minimum Quantity Guide

| Part Number | | Dimensions (mm) | | | Quantity (pcs.) | |
|---------------------------|-------------|-----------------|------|------|-----------------|---------------|
| | | | | | ø180mm Reel | |
| | | L | W | T | Paper Tape | Embossed Tape |
| Medium Voltage | GRM18 | 1.6 | 0.8 | 0.8 | 4,000 | - |
| | GRM21 | 2.0 | 1.25 | 1.0 | 4,000 | - |
| | | | | 1.25 | - | 3,000 |
| | GRM31/GR731 | 3.2 | 1.6 | 1.0 | 4,000 | - |
| | | | | 1.25 | - | 3,000 |
| | | | | 1.6 | - | 2,000 |
| | GRM32 | 3.2 | 2.5 | 1.0 | 4,000 | - |
| | | | | 1.25 | - | 3,000 |
| | | | | 1.5 | - | 2,000 |
| | | | | 2.0 | - | 1,000 |
| | GRM42/GR442 | 4.5 | 2.0 | 1.0 | - | 3,000 |
| | | | | 1.5 | - | 2,000 |
| 2.0 | | | | - | 2,000 | |
| GRM43/GR443 | 4.5 | 3.2 | 1.5 | - | 1,000 | |
| | | | 2.0 | - | 1,000 | |
| | | | 2.5 | - | 500 | |
| GRM55/GR455 | 5.7 | 5.0 | 2.0 | - | 1,000 | |
| AC250V | GA242 | 4.5 | 2.0 | 1.5 | - | 2,000 |
| | GA243 | 4.5 | 3.2 | 1.5 | - | 1,000 |
| | | | | 2.0 | - | 1,000 |
| GA255 | 5.7 | 5.0 | 2.0 | - | 1,000 | |
| Safety Std. Certification | GA342 | 4.5 | 2.0 | 1.0 | - | 3,000 |
| | | | | 1.5 | - | 2,000 |
| | | | | 2.0 | - | 2,000 |
| | GA343 | 4.5 | 3.2 | 1.5 | - | 1,000 |
| | | | | 2.0 | - | 1,000 |
| | GA352 | 5.7 | 2.8 | 1.5 | - | 1,000 |
| | GA355 | 5.7 | 5.0 | 1.5 | - | 1,000 |
| | | | | 2.0 | - | 1,000 |
| | | | | 2.5 | - | 500 |
| 2.7 | | | | - | 500 | |
| | | | 2.9 | - | 500 | |


■ Tape Carrier Packaging

(1) Appearance of Taping

① Embossed Tape

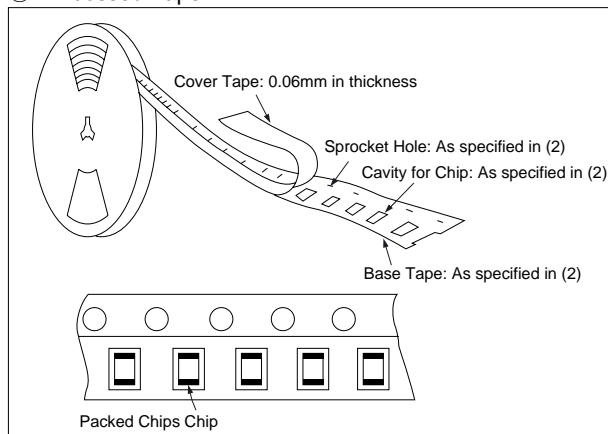

② Paper Tape

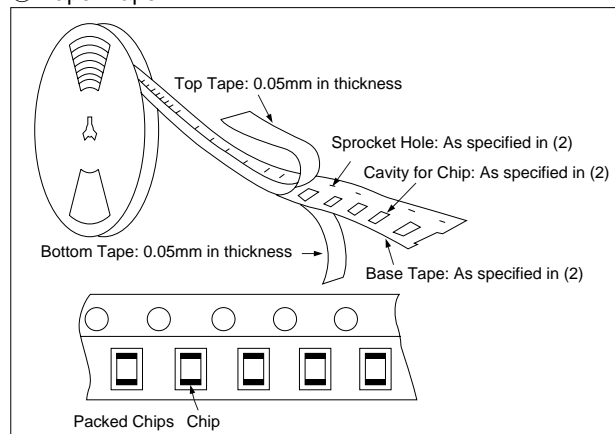


Continued on the following page.

Package


Continued from the preceding page.

(2) Dimensions of Tape


① Embossed Tape

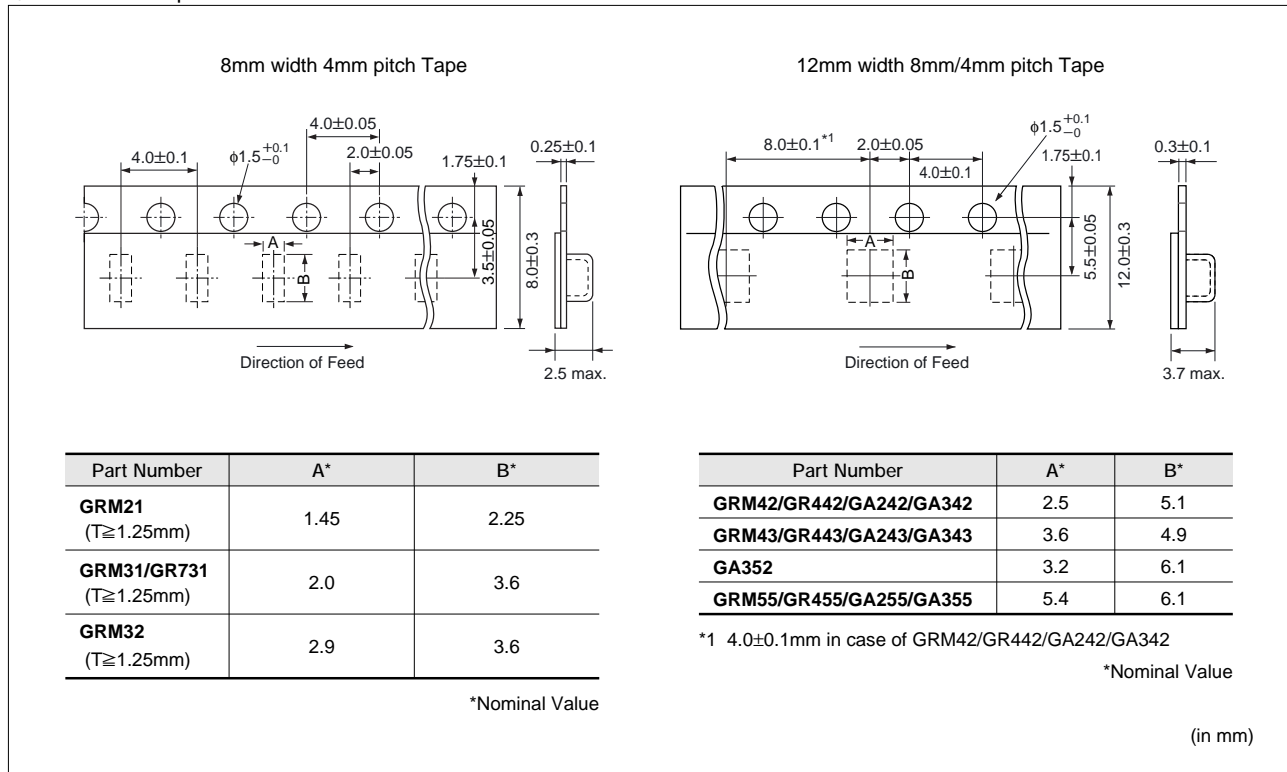

② Paper Tape

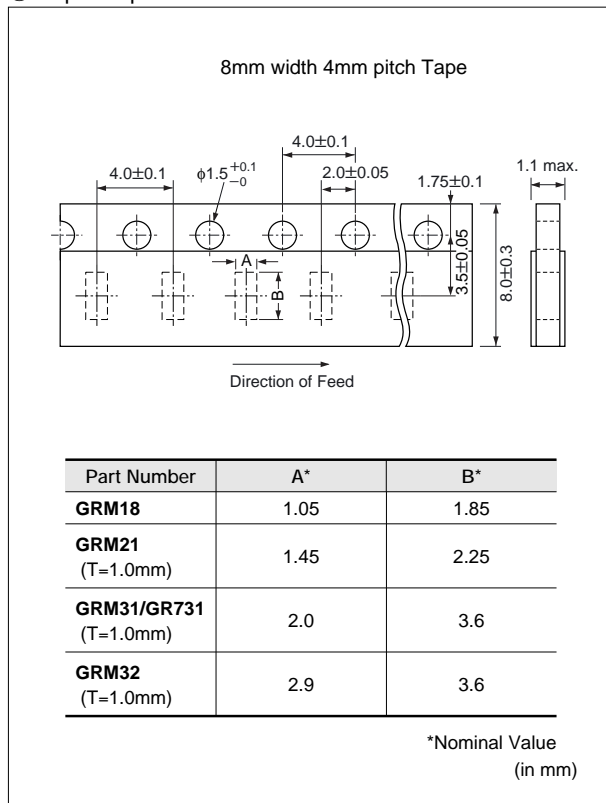

(3) Dimensions of Reel

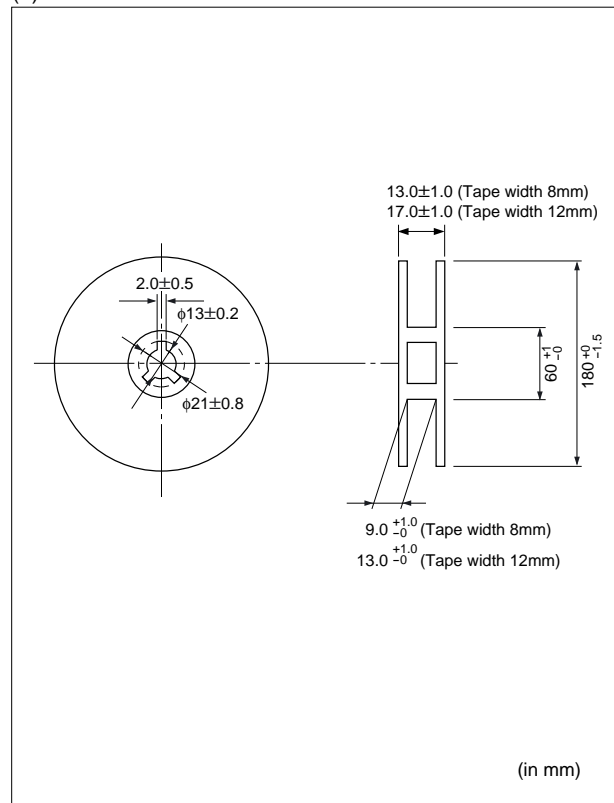



Continued on the following page.

Package

☒ Continued from the preceding page.

(4) Taping Method

- ① Tapes for capacitors are wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.
- ② Part of the leader and part of the empty tape should be attached to the end of the tape as shown at right.
- ③ The top tape or cover tape and base tape are not attached at the end of the tape for a minimum of 5 pitches.
- ④ Missing capacitors number within 0.1% of the number per reel or 1 pc, whichever is greater, and are not continuous.
- ⑤ The top tape or cover tape and bottom tape should not protrude beyond the edges of the tape and should not cover sprocket holes.
- ⑥ Cumulative tolerance of sprocket holes, 10 pitches: $\pm 0.3\text{mm}$.
- ⑦ Peeling off force: 0.1 to 0.6N in the direction shown at right.

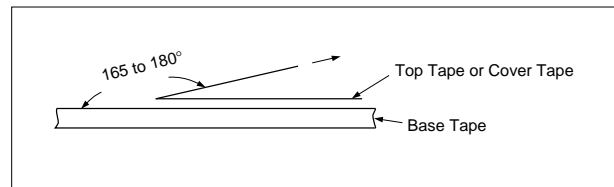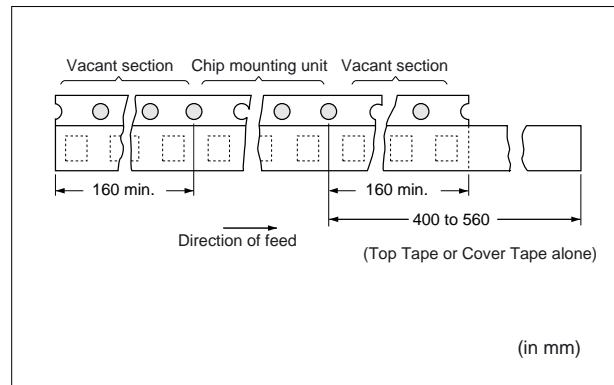

Caution

■ Storage and Operating Conditions

Operating and storage environment

Do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to moisture. Before cleaning, bonding or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment. Store the capacitors where the temperature and relative humidity do not exceed 5 to 40 degrees centigrade and 20 to 70%.

Use capacitors within 6 months after delivered.

Check the solderability after 6 months or more.

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.

■ Handling

1. Vibration and impact

Do not expose a capacitor to excessive shock or vibration during use.

2. Do not directly touch the chip capacitor, especially the ceramic body. Residue from hands/fingers may create a short circuit environment.

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.



■ Caution (Rating)

1. Operating Voltage

When DC-rated capacitors are to be used in AC or ripple current circuits, be sure to maintain the V_{p-p} value of the applied voltage or the V_{0-p} which contains DC bias within the rated voltage range.

When the voltage is applied to the circuit, starting or stopping may generate irregular voltage for a transit period because of resonance or switching. Be sure to use a capacitor with a rated voltage range that includes these irregular voltages.

When DC-rated capacitors are to be used in input circuits from commercial power source (AC filter), be sure to use Safety Certified Capacitors because various regulations on withstand voltage or impulse withstand established for each equipment should be taken into considerations.

| Voltage | DC Voltage | DC+AC Voltage | AC Voltage | Pulse Voltage (1) | Pulse Voltage (2) |
|------------------------|------------|---------------|------------|-------------------|-------------------|
| Positional Measurement | | | | | |

2. Operating Temperature, Self-generated Heat, and Load Reduction at High-frequency Voltage Condition

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency voltage, pulse voltage, it may self-generate heat due to dielectric loss.

(1) In case of X7R char.

Applied voltage should be the load such as self-generated heat is within 20°C on the condition of atmosphere temperature 25°C. When measuring, use a thermocouple of small thermal capacity -K of $\phi 0.1\text{mm}$ in conditions where the capacitor is not affected by radiant heat from other components or surrounding ambient fluctuations. Excessive heat may lead to deterioration of the capacitor's characteristics and reliability. (Never attempt to perform measurement with the cooling fan running. Otherwise, accurate measurement cannot be ensured.)

Continued on the following page.

⚠ Caution

Continued from the preceding page.

(2) In case of C0G, U2J char.

Due to the low self-heating characteristics of low-dissipation capacitors, the allowable electric power of these capacitors is generally much higher than that of X7R characteristic capacitors.

When a high frequency voltage which cause 20°C self heating to the capacitor is applied, it will exceed capacitor's allowable electric power.

The frequency of the applied sine wave voltage should be less than 500kHz (less than 100kHz in case of rated voltage: DC3.15kV). The applied voltage should be less than the value shown in figure below.

While, in case of non-sine wave which include a harmonic frequency, please contact our sales representatives or product engineers. Excessive heat may lead to deterioration of the capacitor's characteristics and reliability. (Never attempt to perform measurement with the cooling fan running. Otherwise, accurate measurement cannot be ensured.)

<C0G char., Rated Voltage: DC3.15kV>

The capacitors less than 22pF can be applied maximum 4.0kV peak to peak at 100kHz or less only for the ballast or the resonance usage in the LCD backlight inverter circuit.

<Capacitor Selection Tool>

We are also offering free software the "capacitor selection tool: Murata Medium Voltage Capacitors Selection Tool by Voltage Form (*)" which will assist you in selecting a suitable capacitor.


The software can be downloaded from Murata's Internet Website.

(http://www.murata.com/designlib/mmcsv_e.html).

By inputting capacitance values and applied voltage waveform of the specific capacitor series, this software will calculate the capacitor's power consumption and list suitable capacitors (non-sine wave is also available).

* Subject series are below.

· Temperature Characteristics C0G, U2J

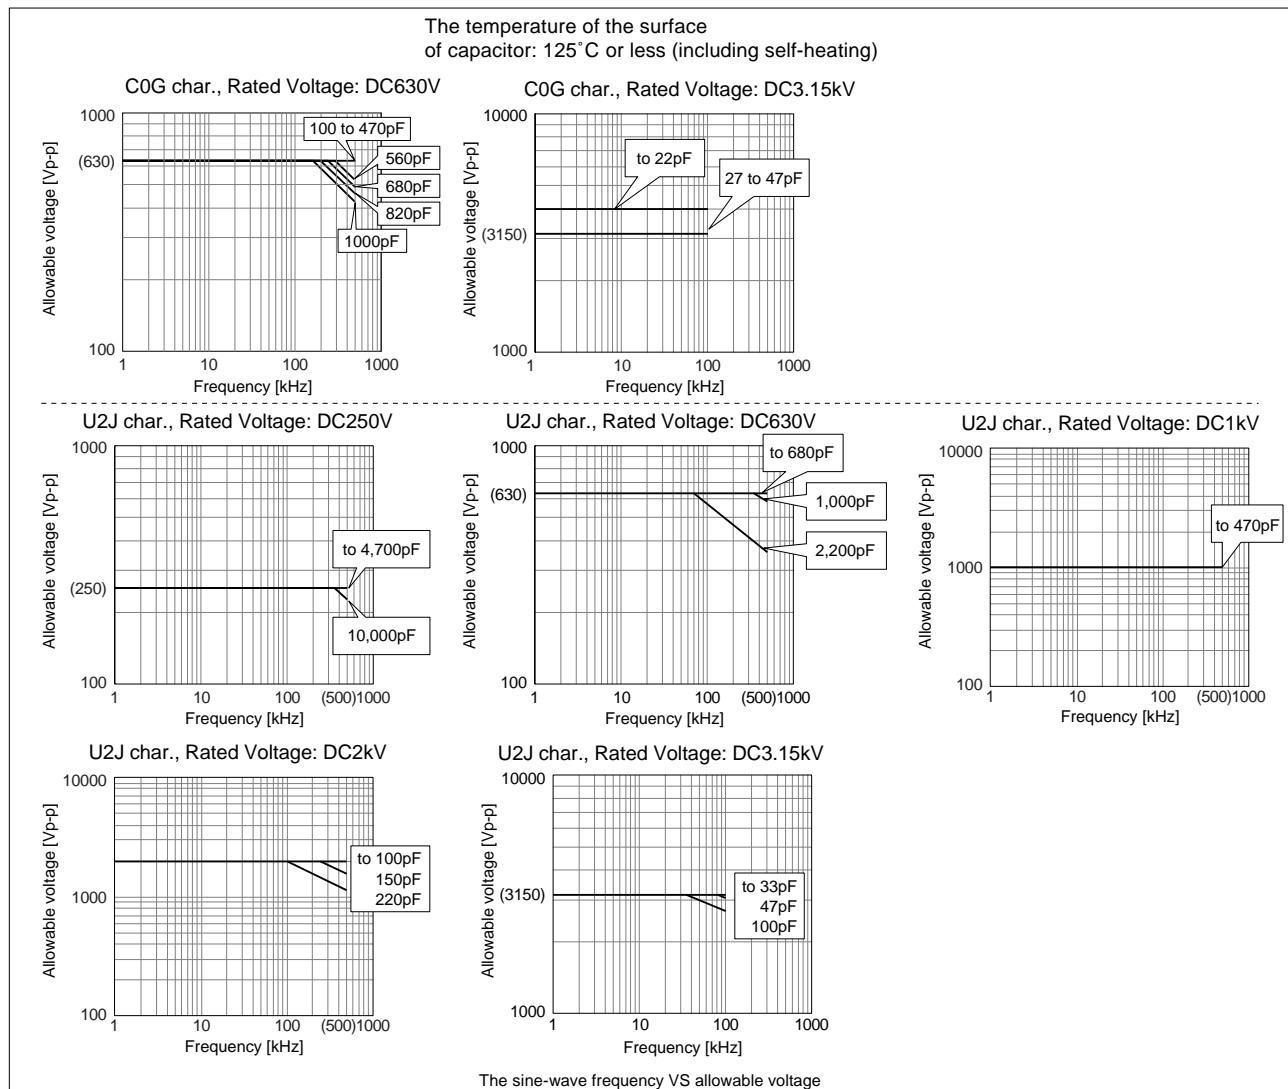

Continued on the following page. ↗


Caution

Continued from the preceding page.

3. Fail-safe

Failure of a capacitor may result in a short circuit. Be sure to provide an appropriate fail-safe function such as a fuse on your product to help eliminate possible electric shock, fire, or fumes.

Please consider using fuses on each AC line if the capacitors are used between the AC input lines and earth (line bypass capacitors), to prepare for the worst case, such as a short circuit.

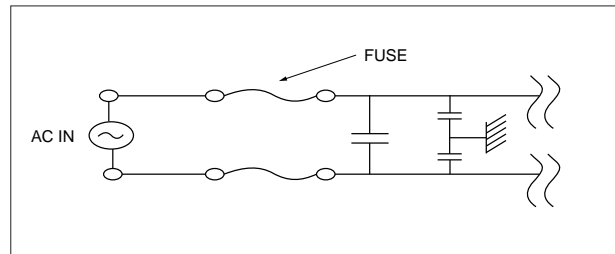

4. Test Condition for AC Withstanding Voltage

(1) Test Equipment

Tests for AC withstanding voltage should be made with equipment capable of creating a wave similar to a 50/60 Hz sine wave.


If the distorted sine wave or overload exceeding the specified voltage value is applied, a defect may be caused.

(2) Voltage Applied Method

The capacitor's leads or terminals should be firmly connected to the output of the withstanding voltage test equipment, and then the voltage should be raised from near zero to the test voltage. If the test voltage is applied directly to the capacitor without raising it from near zero, it should be applied with the zero cross*. At the end of the test time, the test voltage should be reduced to near zero, and then the capacitor's leads or terminals should be taken off the output of the withstanding voltage test equipment. If the test voltage is applied directly to the capacitor without raising it from near zero, surge voltage may occur and cause a defect.

*ZERO CROSS is the point where voltage sine wave pass 0V.

- See the figure at right -

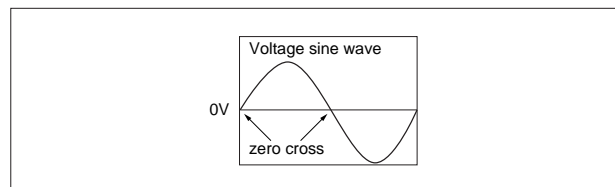

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.

⚠ Caution

■ Caution (Soldering and Mounting)

1. Vibration and Impact

Do not expose a capacitor to excessive shock or vibration during use.

2. Circuit Board Material


It is possible for the chip to crack by the expansion and shrinkage of a metal board.

Please contact us if you want to use our ceramic capacitors on a metal board such as Aluminum.


3. Land Layout for Cropping PC Board

Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.

[Component Direction]




<Example to be avoided>



<Examples of improvements>

Locate chip horizontal to the direction in which stress acts.

[Chip Mounting Close to Board Separation Point]



Chip arrangement
Worst A>C>B-D Best

Continued on the following page. ↗



Continued from the preceding page.

4. Reflow Soldering

- When sudden heat is given to the components, the mechanical strength of the components should go down because remarkable temperature change causes deformity of components inside. In order to prevent mechanical damage in the components, preheating should be required for both of the components and the PCB board. Preheating conditions are shown in Table 1. It is required to keep temperature differential between the soldering and the components surface (ΔT) as small as possible.
- Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.
- When components are immersed in solvent after mounting, be sure to maintain the temperature difference (ΔT) between the component and solvent within the range shown in the Table 1.

Table 1

| Part Number | Temperature Differential |
|-------------------|-----------------------------------|
| G□□18/21/31 | $\Delta T \leq 190^\circ\text{C}$ |
| G□□32/42/43/52/55 | $\Delta T \leq 130^\circ\text{C}$ |

Recommended Conditions

| | Pb-Sn Solder | | Lead Free Solder |
|------------------|-----------------|--------------|-----------------------|
| | Infrared Reflow | Vapor Reflow | |
| Peak Temperature | 230-250°C | 230-240°C | 240-260°C |
| Atmosphere | Air | Air | Air or N ₂ |

Pb-Sn Solder: Sn-37Pb
 Lead Free Solder: Sn-3.0Ag-0.5Cu



Optimum Solder Amount for Reflow Soldering

- Overly thick application of solder paste results in excessive fillet height solder. This makes the chip more susceptible to mechanical and thermal stress on the board and may cause cracked chips.
- Too little solder paste results in a lack of adhesive strength on the outer electrode, which may result in chips breaking loose from the PCB.
- Make sure the solder has been applied smoothly to the end surface to a height of 0.2mm min.


Inverting the PCB

Make sure not to impose an abnormal mechanical shock on the PCB.

[Standard Conditions for Reflow Soldering]

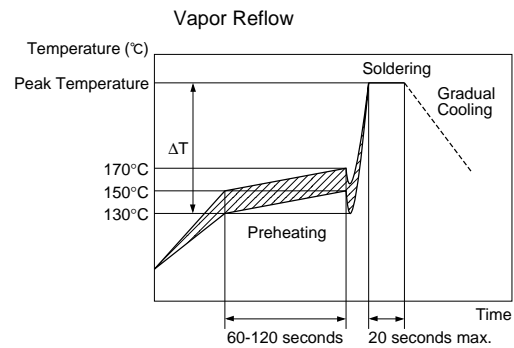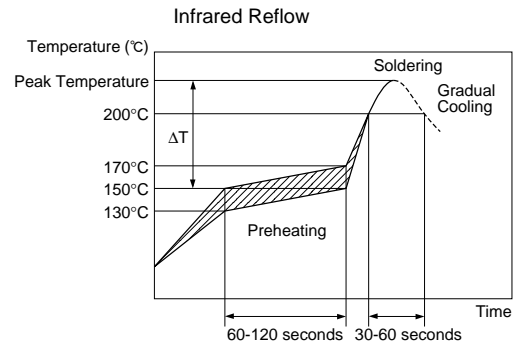


[Allowable Soldering Temperature and Time]

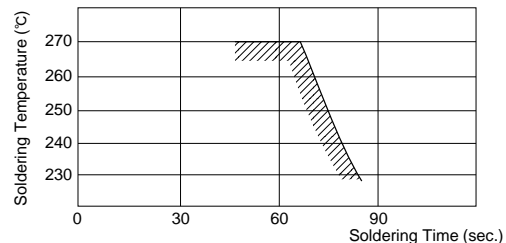

In case of repeated soldering, the accumulated soldering time must be within the range shown above.

[Optimum Solder Amount for Reflow Soldering]

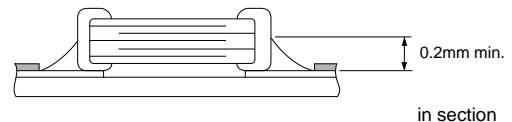

Continued on the following page. ↗

⚠ Caution

☞ Continued from the preceding page.

5. Flow Soldering

- When sudden heat is given to the components, the mechanical strength of the components should go down because remarkable temperature change causes deformity of components inside. And an excessively long soldering time or high soldering temperature results in leaching by the outer electrodes, causing poor adhesion or a reduction in capacitance value due to loss of contact between electrodes and end termination.
- In order to prevent mechanical damage in the components, preheating should be required for both of the components and the PCB board. Preheating conditions are shown in Table 2. It is required to keep temperature differential between the soldering and the components surface (ΔT) as small as possible.
- When components are immersed in solvent after mounting, be sure to maintain the temperature difference between the component and solvent within the range shown in Table 2.
Do not apply flow soldering to chips not listed in Table 2.

Table 2

| Part Number | Temperature Differential |
|-------------|-----------------------------------|
| G□□18/21/31 | $\Delta T \leq 150^\circ\text{C}$ |

Recommended Conditions


| | Pb-Sn Solder | Lead Free Solder |
|------------------|--------------|------------------|
| Peak Temperature | 240-250°C | 250-260°C |
| Atmosphere | Air | N ₂ |

Pb-Sn Solder: Sn-37Pb


Lead Free Solder: Sn-3.0Ag-0.5Cu

- Optimum Solder Amount for Flow Soldering
The top of the solder fillet should be lower than the thickness of components. If the solder amount is excessively big, the risk of cracking is higher during board bending or under any other stressful conditions.


[Standard Conditions for Flow Soldering]

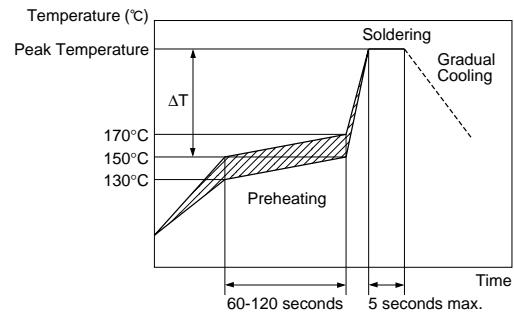

[Allowable Soldering Temperature and Time]

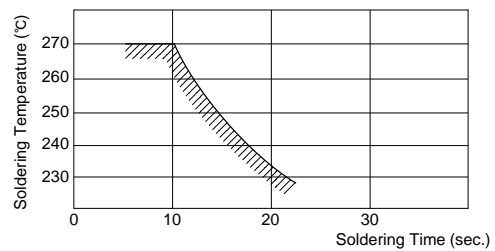

In case of repeated soldering, the accumulated soldering time must be within the range shown above.

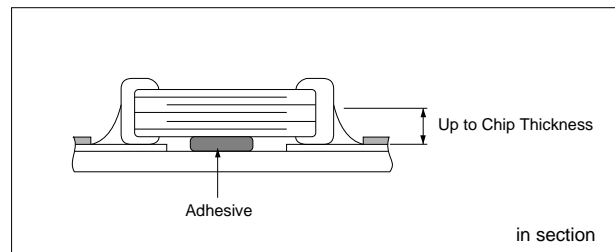

in section

Continued on the following page. ☞

Caution

Continued from the preceding page.

6. Correction with a Soldering Iron

- When sudden heat is applied to the components by use of a soldering iron, the mechanical strength of the components will go down because the extreme temperature change causes deformations inside the components.

In order to prevent mechanical damage to the components, preheating is required for both the components and the PCB board.

Preheating conditions, (The "Temperature of the Soldering Iron Tip", "Preheating Temperature", "Temperature Differential" between iron tip and the

components and the PCB), should be within the conditions of table 3.

It is required to keep the temperature differential between the soldering Iron and the components surface (ΔT) as small as possible.

After soldering, do not allow the component/PCB to cool down rapidly.

The operating time for the re-working should be as short as possible. When re-working time is too long, it may cause solder leaching, and that will cause a reduction of the adhesive strength of the terminations.

Table 3

| Part Number | Temperature of Soldering Iron tip | Preheating Temperature | Temperature Differential (ΔT) | Atmosphere |
|-------------------|-----------------------------------|------------------------|---|------------|
| G□□18/21/31 | 350°C max. | 150°C min. | $\Delta T \leq 190^\circ\text{C}$ | air |
| G□□32/42/43/52/55 | 280°C max. | 150°C min. | $\Delta T \leq 130^\circ\text{C}$ | air |

*Applicable for both Pb-Sn and Lead Free Solder.

Pb-Sn Solder: Sn-37Pb

Lead Free Solder: Sn-3.0Ag-0.5Cu

- Optimum Solder Amount when re-working Using a Soldering Iron

In case of smaller sizes than G□□18, the top of the solder fillet should be lower than 2/3's of the thickness of the component or 0.5mm whichever is smaller.


In case of larger sizes than G□□21, the top of the solder fillet should be lower than 2/3's of the thickness of the component.

If the solder amount is excessive, the risk of cracking is higher during board bending or under any other stressful conditions.

A Soldering iron $\phi 3\text{mm}$ or smaller should be used.

It is also necessary to keep the soldering iron from touching the components during the re-work.

Solder wire with $\phi 0.5\text{mm}$ or smaller is required for soldering.

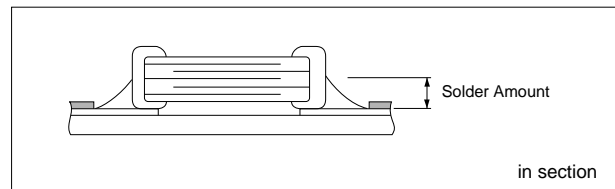

7. Washing

Excessive output of ultrasonic oscillation during cleaning causes PCBs to resonate, resulting in cracked chips or broken solder. Take note not to vibrate PCBs.

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND FUMING WHEN THE PRODUCT IS USED.


Notice

■ Notice (Soldering and Mounting)

1. Construction of Board Pattern

After installing chips, if solder is excessively applied to the circuit board, mechanical stress will cause destruction resistance characteristics to lower. To prevent this, be extremely careful in determining shape and dimension before designing the circuit board diagram.

Construction and Dimensions of Pattern (Example)

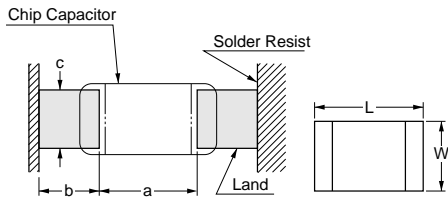

Flow Soldering

| L×W | a | b | c |
|----------|---------|---------|---------|
| 1.6×0.8 | 0.6-1.0 | 0.8-0.9 | 0.6-0.8 |
| 2.0×1.25 | 1.0-1.2 | 0.9-1.0 | 0.8-1.1 |
| 3.2×1.6 | 2.2-2.6 | 1.0-1.1 | 1.0-1.4 |


Flow soldering : 3.2×1.6 or less available.

Reflow Soldering

| L×W | a | b | c |
|----------|---------|---------|---------|
| 1.6×0.8 | 0.6-0.8 | 0.6-0.7 | 0.6-0.8 |
| 2.0×1.25 | 1.0-1.2 | 0.6-0.7 | 0.8-1.1 |
| 3.2×1.6 | 2.2-2.4 | 0.8-0.9 | 1.0-1.4 |
| 3.2×2.5 | 2.0-2.4 | 1.0-1.2 | 1.8-2.3 |
| 4.5×2.0 | 2.8-3.4 | 1.2-1.4 | 1.4-1.8 |
| 4.5×3.2 | 2.8-3.4 | 1.2-1.4 | 2.3-3.0 |
| 5.7×2.8 | 4.0-4.6 | 1.4-1.6 | 2.1-2.6 |
| 5.7×5.0 | 4.0-4.6 | 1.4-1.6 | 3.5-4.8 |

(in mm)

Dimensions of Slit (Example)

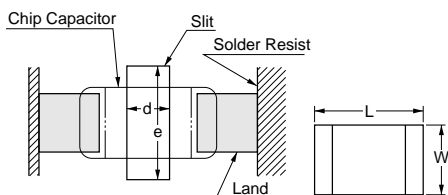

| L×W | d | e |
|----------|---------|---------|
| 1.6×0.8 | - | - |
| 2.0×1.25 | - | - |
| 3.2×1.6 | 1.0-2.0 | 3.2-3.7 |
| 3.2×2.5 | 1.0-2.0 | 4.1-4.6 |
| 4.5×2.0 | 1.0-2.8 | 3.6-4.1 |
| 4.5×3.2 | 1.0-2.8 | 4.8-5.3 |
| 5.7×2.8 | 1.0-4.0 | 4.4-4.9 |
| 5.7×5.0 | 1.0-4.0 | 6.6-7.1 |

(in mm)

Preparing slit helps flux cleaning and resin coating on the back of the capacitor. But, the length of slit design should be shorter enough as much as possible to prevent the mechanical damage in the capacitor. The longer slit design might receive more severe mechanical stress from the PCB. Recommendable slit design is shown in the Table.

Continued on the following page.

Notice

Continued from the preceding page.

Land Layout to Prevent Excessive Solder

| | Mounting Close to a Chassis | Mounting with Leaded Components | Mounting Leaded Components Later |
|---|-----------------------------|---------------------------------|----------------------------------|
| Examples of Prohibition | | | |
| Examples of Improvements by the Land Division | | | |

2. Mounting of Chips


- Thickness of adhesives applied
Keep thickness of adhesives applied (50-105μm or more) to reinforce the adhesive contact considering the thickness of the termination or capacitor (20-70μm) and the land pattern (30-35μm).
- Mechanical shock of the chip placer
When the positioning claws and pick-up nozzle are worn, the load is applied to the chip while positioning is concentrated in one position, thus causing cracks, breakage, faulty positioning accuracy, etc. Careful checking and maintenance are necessary to prevent unexpected trouble.
An excessively low bottom dead point of the suction nozzle imposes great force on the chip during mounting, causing cracked chips. Please set the suction nozzle's bottom dead point on the upper surface of the board.

3. Soldering

(1) Limit of losing effective area of the terminations and conditions needed for soldering.

Depending on the conditions of the soldering temperature and/or immersion (melting time), effective areas may be lost in some part of the terminations.

To prevent this, be careful in soldering so that any possible loss of the effective area on the terminations will securely remain at a maximum of 25% on all edge length A-B-C-D-A of part with A, B, C, D, shown in the Figure below.

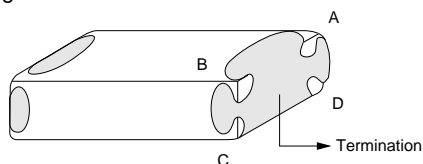

(2) Flux Application

- An excessive amount of flux generates a large quantity of flux gas, causing deteriorated solderability. So apply flux thinly and evenly throughout. (A foaming system is generally used for flow soldering.)
- Flux containing too high percentage of halide may cause corrosion of the outer electrodes unless sufficient cleaning. Use flux with a halide content of 0.2% max.
- Do not use strong acidic flux.
- Do not use water-soluble flux*.
(*Water-soluble flux can be defined as non rosin type flux including wash-type flux and non-wash-type flux.)

Continued on the following page. ↗

Notice

☒ Continued from the preceding page.

4. Cleaning

Please confirm there is no problem in the reliability of the product beforehand when cleaning it with the intended equipment.

The residue after cleaning it might cause the decrease in the surface resistance of the chip and the corrosion of the electrode part, etc. As a result it might cause reliability to deteriorate. Please confirm beforehand that there is no problem with the intended equipment in ultrasonic cleansing.

5. Resin Coating

Please use it after confirming there is no influence on the product with a intended equipment beforehand when the resin coating and molding.

A cracked chip might be caused at the cooling/heating cycle by the amount of resin spreading and/or bias thickness.

The resin for coating and molding must be selected as the stress is small when stiffening and the hygroscopic is low as possible.

■ Rating

1. Capacitance change of capacitor

(1) In case of X7R char.

Capacitors have an aging characteristic, whereby the capacitor continually decreases its capacitance slightly if the capacitor is left on for a long time. Moreover, capacitance might change greatly depending on the surrounding temperature or an applied voltage. So, it is not likely to be suitable for use in a time constant circuit.

Please contact us if you need detailed information.

(2) In case of any char. except X7R

Capacitance might change a little depending on the surrounding temperature or an applied voltage.

Please contact us if you intend to use this product in a strict time constant circuit.

2. Performance check by equipment

Before using a capacitor, check that there is no problem in the equipment's performance and the specifications.

Generally speaking, CLASS 2 (X7R char.) ceramic capacitors have voltage dependence characteristics and temperature dependence characteristics in capacitance. So, the capacitance value may change depending on the operating condition in the equipment. Therefore, be sure to confirm the apparatus performance of receiving influence in a capacitance value change of a capacitor, such as leakage current and noise suppression characteristics.

Moreover, check the surge-proof ability of a capacitor in the equipment, if needed, because the surge voltage may exceed specific value by the inductance of the circuit.

ISO 9001 Certifications

■ Qualified Standards

The products listed here have been produced by ISO 9001 certified factory.

| Plant |
|--|
| Fukui Murata Mfg. Co., Ltd. |
| Izumo Murata Mfg. Co., Ltd. |
| Okayama Murata Mfg. Co., Ltd. |
| Murata Electronics Singapore (Pte.) Ltd. |
| Beijing Murata Electronics Co., Ltd. |
| Wuxi Murata Electronics Co., Ltd. |

△Note:

1. Export Control

<For customers outside Japan>

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

<For customers in Japan>

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.

- | | |
|-----------------------------|--|
| ① Aircraft equipment | ② Aerospace equipment |
| ③ Undersea equipment | ④ Power plant equipment |
| ⑤ Medical equipment | ⑥ Transportation equipment (vehicles, trains, ships, etc.) |
| ⑦ Traffic signal equipment | ⑧ Disaster prevention / crime prevention equipment |
| ⑨ Data-processing equipment | ⑩ Application of similar complexity and/or reliability requirements to the applications listed above |

3. Product specifications in this catalog are as of Jul 2009. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.

4. Please read rating and △ CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.

5. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



Murata Manufacturing Co., Ltd.

<http://www.murata.com/>

Head Office

1-10-1, Higashi Kotari, Nagaokakyo-shi, Kyoto 617-8555, Japan
Phone: 81-75-951-9111

International Division

3-29-12, Shibuya, Shibuya-ku, Tokyo 150-0002, Japan
Phone: 81-3-5469-6123 Fax: 81-3-5469-6155 E-mail: intl@murata.co.jp