PRODUCT NO	HOUSING COLOR	DIMENSION "C"	GOLD PLATING
69845-036	BLACK	5	0.1μm MIN.
69845-936	BLACK	PIN NO.1~35 : 5 PIN NO.36 : 4	0.1μm MIN.
69845-836	BLACK	PIN NO.18, 33 : 5 OTHERS : 4	0.1μm MIN.
69845-136	BLACK	5	0.76μm MIN.

REVISIONS			
REV	DESCRIPTION	BY	DATE
A	[illegible]	N.H	4/1/[illegible]
B	[illegible]	N.H	3/7/[illegible]
C	[illegible]	N.H	7/30/[illegible]
D	[illegible]	N.H	8/20/[illegible]
E	[illegible]	N.H	2/2/87
F	[illegible]	N.H	9/2/[illegible]
G	[illegible]	N.H	11/27/87
H	[illegible]	[illegible]	9/6/[illegible]
J	REVISED	M.Y	2/27/91

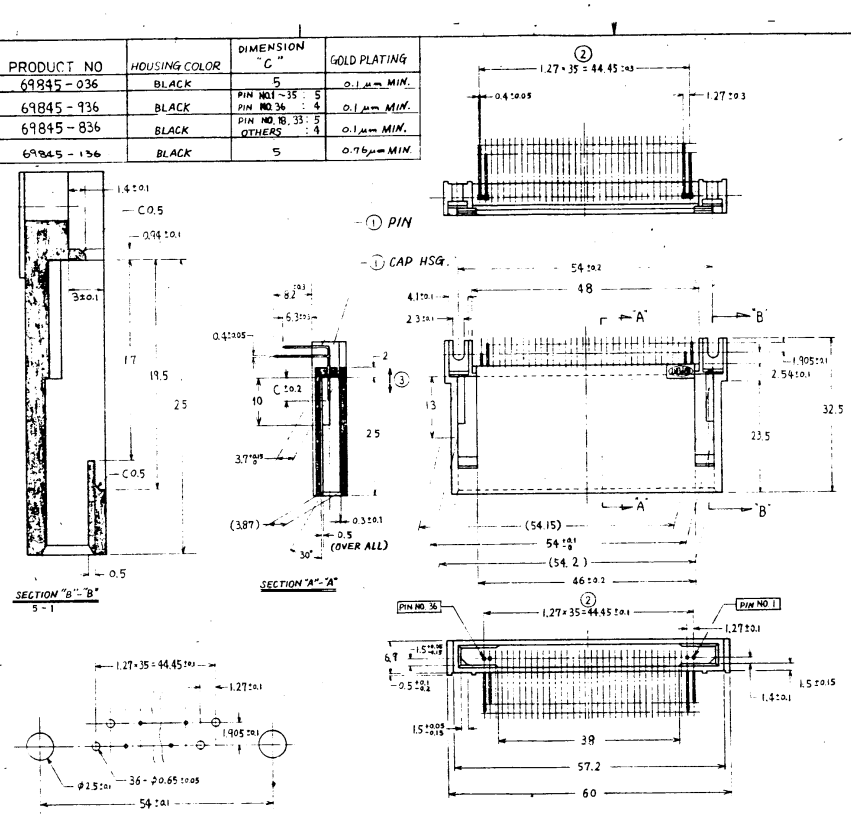

NOTE

① MATL AND FINISH

PIN

MATL – PHOSPHOR BRONZE

FINISH – ALL OVER : Ni UNDER PLATING 0.5μm Min.

CONTACT AREA : Pd-Ni PLATING AND OVER Au PLATING 0.1μm or 0.76μm Min.

SOLDER AREA : TIN-LEAD (4/1) PLATING 3.8μm Min.

CAP HSG.

MATL – 25% GLASS FILLED 66 NYLON UL94V-0

② TOLERANCE – NON ACCUMULATED

③ CONTACT PIN RETENTION FORCE TO BE 0.8 Kg/PIN Min. BOTH DIRECTIONS AS SHOWN.

④ RECOMMENDED SCREW NUT TORQUE – 1.5~2 kg·cm (WHEN USED M2 SLOTTED PAN HEAD SCREW, HEXAGON NUT AND WASHER)

SHEET INDEX	ISSUE	
	SH NO	1

LEVELS

TABULATION SHEETS REQUIRED: YES / NO

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

MM / INCH

TOLERANCE UNLESS OTHERWISE NOTED MM/INCH ±0.3

LINEAR: 0.00±0.25/.00±.01; 0.00±0.13/.000±.005; 0.0000±0.051/.0000±.0020

ANGLES ±2°0'

MATL NOTE ①

FINISH NOTE ①

		DATE
DR	[signature]	4/4/[illegible]
CHK	[signature]	4/4/[illegible]
ENGR	[signature]	4/4/[illegible]
APPD	[signature]	4/4/[illegible]

CUSTOMER COPY

CODE IDENT 22526

DuPont Electronics

TITLE: MEMORY CARD CONNECTOR 36 POS CAP ASSEMBLY

SCALE 2-1 | SIZE C | DWG NO 69845 | SHEET 1/1

NOTE: This print is the property of and embodies proprietary designs of DUPONT CONNECTOR SYSTEMS, Division of E.I. du Pont de Nemours & Co., Inc.

PDM: Rev:J STATUS:Released Printed: Dec 09, 2006

Downloaded from Elcodis.com electronic components distributor