

GENERAL DESCRIPTION:

The standard SIM connector is specifically designed for hand held devices requiring secure subscriber identification.


The connectors are available in a standard 6 pin configuration on a 2.54 mm pitch and at optional heights of 0.8, 1.6 or 2.4 mm.

Contacts are stamped, gold plated, rated at 0.5A, and 5000 mechanical cycles.

Our contact design is specifically rounded to avoid any possible damage during and after card insertion to the card itself, assuming normal use. The design also incorporates protection features to avoid contact damage during this operation such as contact snagging.

In addition to our offering presented here, other operating heights are available as custom alternatives.


Please contact the appropriate sales office for further details of this service.

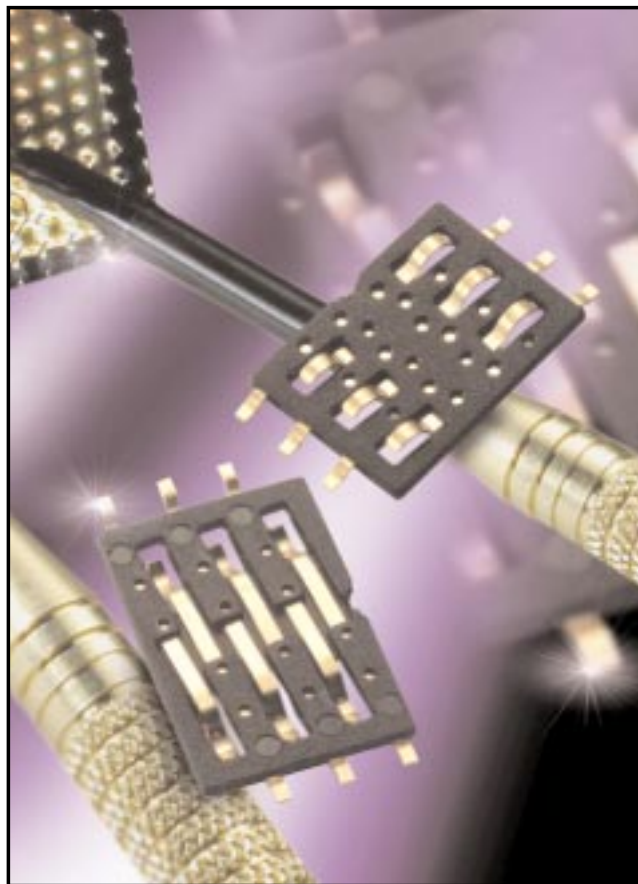


KEY FEATURES AND BENEFITS:

- Produced for use with both full ISO cards and micro SIM cards.
- Stand-off designs allow other components to be mounted underneath the connector offering greater effective use of PCB real estate.
- The insulator is moulded from high temperature plastic enabling the connector to be used in convection or infrared soldering processes.
- Supplied on tape and reel packaging for pick and place assembly.

0.8 mm PCB Pad Layout

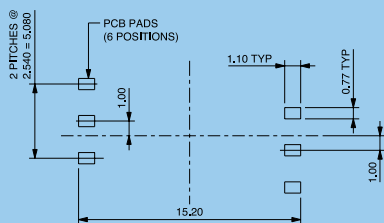


1.6 mm / 2.4 mm PCB Pad Layout

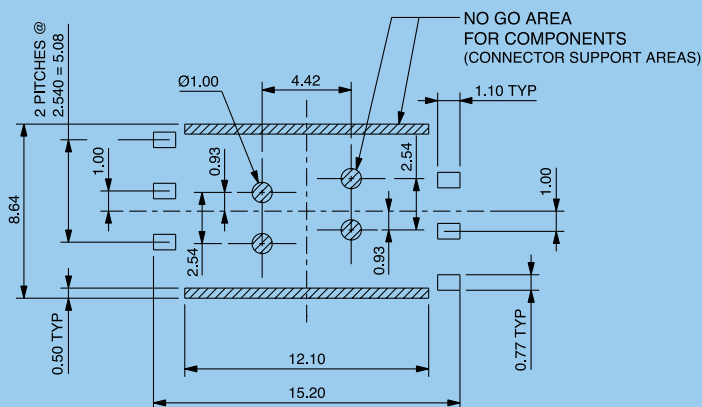


9162 MOBO™ SIM Card Reader





Connector Height 0.8 mm

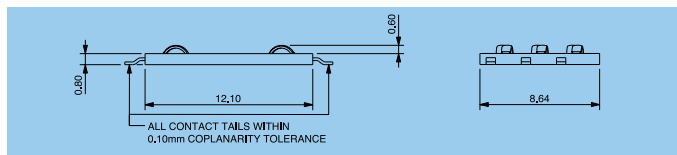

Connector Height 1.6 mm

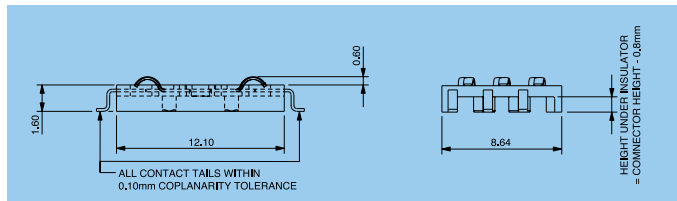

Connector Height 2.4 mm

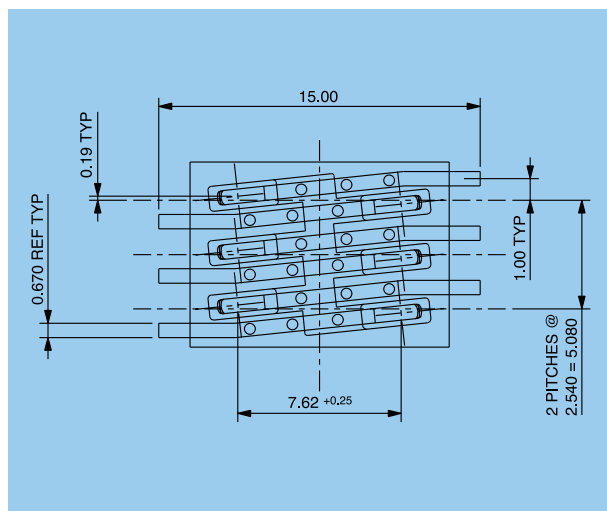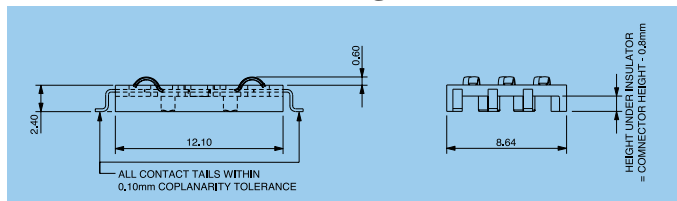

HOW TO ORDER

00
T
PREFIX
00 = Standard
58 = Special

9162
T
SERIES

006
T
NO OF WAYS
006 = 6

000
T
STANDARD

XXX
T
CONNECTOR HEIGHT
080 = 0.8 mm stack height
160 = 1.6 mm stack height
240 = 2.4 mm stack height

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures are indicated or that other measures may not be required. Specifications are typical and many not apply to all applications.



USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
Fax: 843-626-5292

AVX Southwest, AZ
Tel: 480-539-1496
Fax 480-539-1501

AVX Limited, England
European Headquarters
Tel: ++44 (0)1252 770000
Fax: ++44 (0)1252 770001

AVX GmbH, Germany - AVX
Tel: ++49 (0) 8131 9004-0
Fax: ++49 (0) 8131 9004-44

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 258-2833
Fax: (65) 350-4880

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
Fax: (86) 21-6249-0313

AVX Northwest, WA
Tel: 360-669-8746
Fax: 360-699-8751

AVX South Central, TX
Tel: 972-669-1223
Fax: 972-669-2090

AVX/ELCO, England
Tel: ++44 (0)1638 675000
Fax: ++44 (0)1638 675001

AVX srl, Italy
Tel: ++390 (0)2 614571
Fax: ++390 (0)2 614 2576

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
Fax: (852) 2-765-8185

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
Fax: (60) 4-228-1196

AVX North Central, IN
Tel: 317-848-7153
Fax: 317-844-9314

AVX Southeast, NC
Tel: 919-878-6357
Fax: 919-878-6462

AVX S.A., France
Tel: ++33 (1) 69.18.46.00
Fax: ++33 (1) 69.28.73.87

AVX Czech Republic s.r.o.
Tel: ++420 (0)467 558340
Fax: ++420 (0)467 558345

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
Fax: (82) 2-784-5411

Elco, Japan
Tel: 045-943-2906/7
Fax: 045-943-2910

AVX Mid-Pacific, MN
Tel: 952-974-9155
Fax: 952-974-9179

AVX Canada
Tel: 905-564-8959
Fax: 905-564-9728

AVX/Kyocera, Taiwan
Tel: (886) 2-2696-4636
Fax: (886) 2-2696-4237

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
Fax: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
Fax: (81) 75-604-3425

<http://www.avxcorp.com>

ELCO

9162 DS 3K 1002-JB