samtec

RoHS Compliant
Pb LEAD
www.samtec.com/lead-free

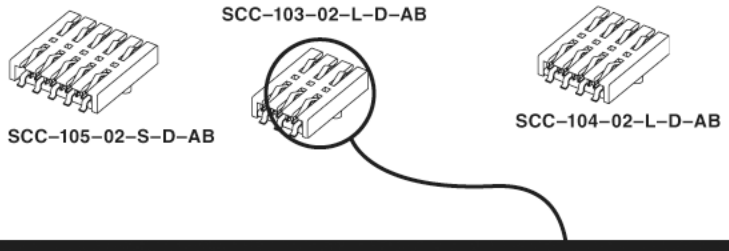

SMART CARD CONNECTOR SCC SERIES

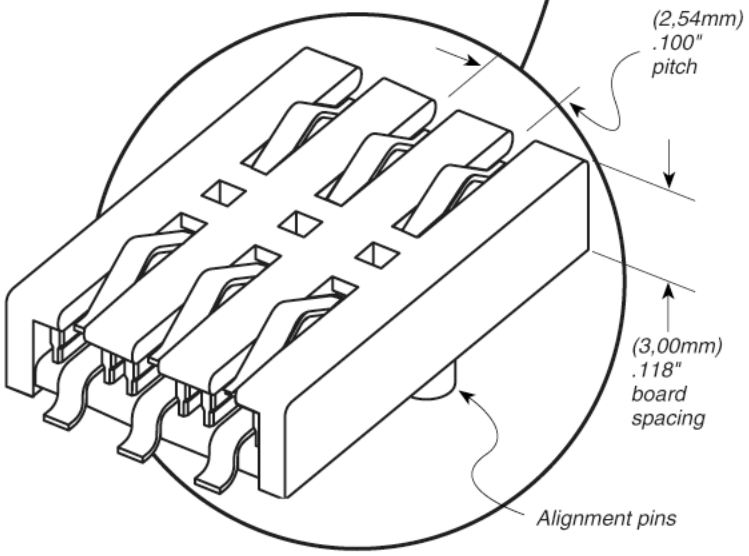

SPECIFICATIONS

For complete specifications see www.samtec.com?SCC

Insulator Material:
Black Liquid Crystal Polymer
FILE NO. E111594
Contact Material:
Phosphor Bronze
Current Rating:
Testing Now!
Operating Temp Range:
-55°C to +125°C
Max Processing Temp:
230°C for 60 seconds
Plating:
Au or Sn over
50µ" (1,27µm) Ni
SMT Lead Coplanarity:
(0,10mm) .004" max
RoHS Compliant:
Yes

SCC	–	1	NO. PINS PER ROW	–	02	–	PLATING OPTION	–	D	–	AB	–	OTHER OPTION
			03, 04, 05				–S = 30µ" (0,76µm) Gold on contact, Mate Tin on tail –L = 10µ" (0,25µm) Gold on contact, Matte Tin on tail						–TR = Tape & Reel Packaging

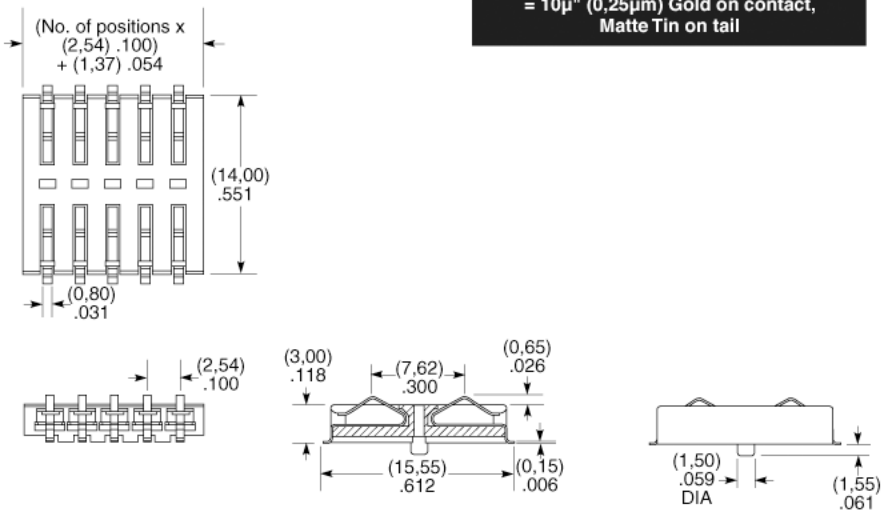

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

Downloaded from Elcodis.com electronic components