

4

3





2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
B2		REVISED PER ECO-11-005150		21MAR11	RK	HMR	

- NOTES:
- FOR LOCAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - MATERIAL :
 HOUSING : THERMOPLASTIC, UL94V-0
 BLACK COLOR
 CONTACTS : PHOSPHOR BRONZE
 SHELL : STEEL
 BOARDLOCK : BRASS
 SCREW : BRASS
 - FINISH :
 CONTACT : 0.38µm MIN. GOLD PLATED ON CONTACT AREA
 2.54µm MIN. TIN PLATED ON SOLDER TAILS
 1.27µm MIN. NICKEL UNDERPLATED OVERALL
 SHELL : 1.52µm MIN. TIN PLATED
 BOARD LOCK : 1.52µm MIN. TIN PLATED
 SCREW : 1.27µm MIN. NICKEL PLATED.
 - CHARACTERISTICS
 CURRENT RATING : 5A
 INSULATION RESISTANCE : 1000MOHMS MIN, 500VDC FOR 2MINS.
 TEMPERATURE RATING : -55DEGC ~ +105DEGC
 VOLTAGE RATING : 250VDC

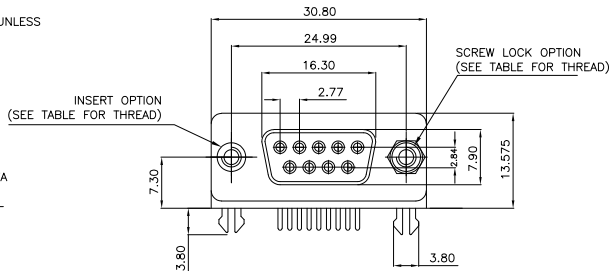

P.C.B. LAYOUT



△ OBSOLETE	9 WAY D SOCKET WITH BOARD LOCKS & 2 x M3 SCREW LOCKS, 0.38µm GOLD, RIGHT ANGLE	4-1634584-2
△ OBSOLETE	9 WAY D SOCKET WITH BOARD LOCKS & 2 x 4-40 SCREW LOCKS, 0.38µm GOLD, RIGHT ANGLE	3-1634584-2
△ OBSOLETE	9 WAY D SOCKET WITH BOARD LOCKS & 2 x M3 INSERTS, 0.38µm GOLD, RIGHT ANGLE	2-1634584-2
△ OBSOLETE	9 WAY D SOCKET WITH BOARD LOCKS & 2 x 4-40 INSERTS, 0.38µm GOLD, RIGHT ANGLE	1-1634584-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. SANDWELL	15SEP2003	TE TE Connectivity
DIMENSIONS: mm		CHK	S. EBUTT	15SEP2003	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	F. WHEELER-KING	15SEP2003	NAME
0 PLC	± .05	PRODUCT SPEC		9 WAY D-SUB SOCKET WITH BOARD LOCK	
1 PLC	± .03	APPLICATION SPEC		SIZE	CAGE CODE
2 PLC	± .02	WEIGHT		A3	00779
3 PLC	± .01	MATERIAL		DRAWING NO	
4 PLC	± .005	FINISH		C-1634584	
ANGLES	± .002	SEE NOTE		RESTRICTED TO	
CUSTOMER DRAWING			SCALE	NTS	SHEET 1 of 2
			REV	B2	

4

3



2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	


NOTES:
 1. DIMENSION:
 TRAY: L=310, W=220, H=23
 SHIPPING BOX: L=335, W=230, H=320
 2. QUANTITY:
 90 PCS/TRAY
 13 TRAY/SHIPPING BOX

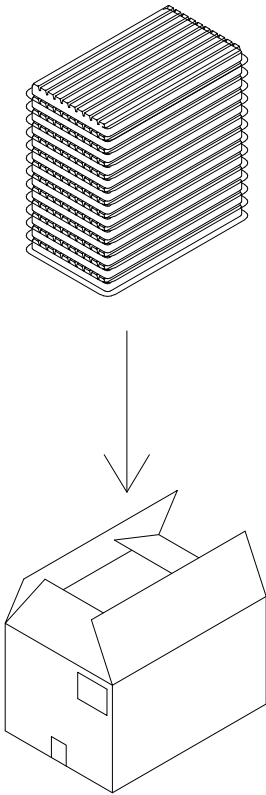


COVER



TRAY

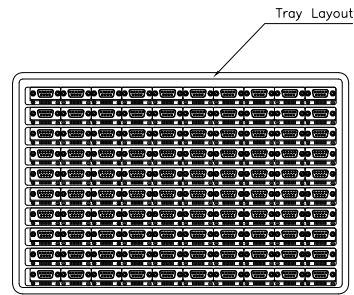

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15SEP2003			TE Connectivity		
DIMENSIONS: mm		CHK	15SEP2003			NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		S. EBBUTT		15SEP2003		9 WAY D-SUB SOCKET WITH BOARD LOCK		
0 PLC ± -		APVD		15SEP2003		PRODUCT SPEC		
1 PLC ± -		F. WHEELER-KING		15SEP2003		APPLICATION SPEC		
2 PLC ± -		MATERIAL		FINISH		WEIGHT		
3 PLC ± -		SEE NOTE		-		SIZE		
4 PLC ± -		-		-		CAGE CODE		
ANGLES ± -		-		-		DRAWING NO		
-		-		-		RESTRICTED TO		
-		-		-		A3 00779 C-1634584		
-		-		-		CUSTOMER DRAWING		
-		-		-		SCALE NTS SHEET 2 of 2 REV B2		