

OLED DISPLAY SOLUTIONS

Pictiva™ 1.0-inch 96x36 OLED display



OS096036Px10MxxB10

Features

- RoHS Compliant
- White, Blue, or Area Color options available
- Low-power consumption for battery-powered devices
- 180° viewing angle

Benefits

- Attractive appearance in White or Blue
- Low-cost graphic solution
- Ultra-thin structure suits mobile devices

Applications


- Mobile Phone sub-display
- MP3 player
- Mobile consumer devices

Specifications

| | | | | | |
|-----------------------------|--|-------|-------|-------------------|--------------------|
| Display Format | 96 Columns x 36 Rows | | | | |
| Diagonal | 1.0 inch | | | | |
| Pixel Pitch | 0.22 mm x 0.22 mm | | | | |
| Color, Luminance & Lifetime | Color On Demand | CIE x | CIE y | cd/m ² | Lifetime hrs, 25°C |
| | Elegance Yellow | 0.46 | 0.54 | 100/200* | 40K/10K* |
| | Lime Green | 0.37 | 0.62 | 120 | 10K |
| | Tiger Orange | 0.63 | 0.37 | 50 | 10K |
| | Galaxy White | 0.25 | 0.25 | 60 | TBA |
| | Ocean Blue | 0.14 | 0.17 | 30 | TBA |
| Grayscale | 1 or 4 bit | | | | |
| Active Area | 21.1 (W) X 8.0 (H) mm | | | | |
| Module Size | 28.6 (W) X 17.26 (H) X 1.7 (T) mm TAB FOLDED | | | | |
| Viewing Angle | 180° | | | | |
| Contrast Ratio | 2000:1 dark ambient | | | | |
| Temperature | -30°C to +70°C Operating | | | | |
| Voltage | 2.4 V– 3.5V (Logic) 12V typical (OLED Supply) | | | | |
| Power | 0.05 mW (Sleep Mode) | | | | |
| Interface | Parallel or Serial (SPI, I ² C), TAB interconnect | | | | |
| Driver | SSD0303 (1-bit), SSD0323 (4-bit) on TAB | | | | |
| Weight | 1.6g nominal | | | | |

* High Brightness Mode

Mechanical Dimensions and Pin Description

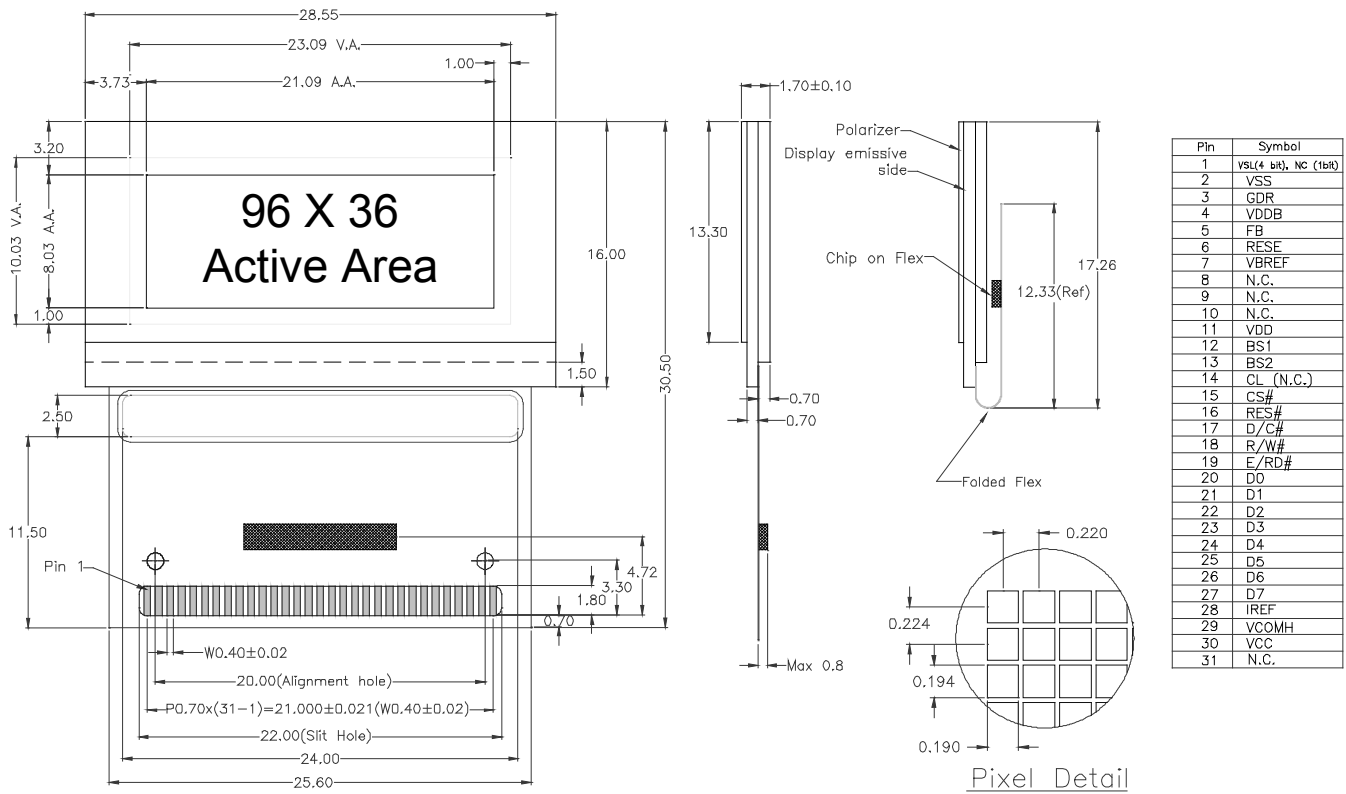

Ordering Information

| Part Number | Order Number | Description |
|--------------------|--------------|---|
| 1-bit | | |
| OS096036PP10MY0B10 | Q65110A3999 | Pictiva™ 1.0 inch 96x36 OLED Display, Elegance Yellow |
| OS096036PP10MG1B10 | Q65110A3998 | Pictiva™ 1.0 inch 96x36 OLED Display, Lime Green |
| OS096036PP10MO1B10 | Q65110A3997 | Pictiva™ 1.0 inch 96x36 OLED Display, Tiger Orange |
| OS096036PP10MW1B10 | Q65110A4518 | Pictiva™ 1.0 inch 96x36 OLED Display, Galaxy White |
| OS096036PP10MB2B10 | Q65110A4000 | Pictiva™ 1.0 inch 96x36 OLED Display, Ocean Blue |
| 4-bit | | |
| OS096036PK10MY0B10 | Q65110A3994 | Pictiva™ 1.0 inch 96x36 OLED Display, Elegance Yellow |
| OS096036PK10MG1B10 | Q65110A3993 | Pictiva™ 1.0 inch 96x36 OLED Display, Lime Green |
| OS096036PK10MO1B10 | Q65110A3992 | Pictiva™ 1.0 inch 96x36 OLED Display, Tiger Orange |
| OS096036PK10MW1B10 | Q65110A4517 | Pictiva™ 1.0 inch 96x36 OLED Display, Galaxy White |
| OS096036PK10MB2B10 | Q65110A3995 | Pictiva™ 1.0 inch 96x36 OLED Display, Ocean Blue |

Contact Information

OSRAM Opto Semiconductors

Asia: +60(4) 631-8100 prasia@osram-os.com
 Europe: +49 (0)941-850-3535 pr@osram-os.com
 North America: +1-888-446-7726 ext.4310 info@osram-os.com

Web: www.pictiva.com

©2005 OSRAM Opto Semiconductors. OSRAM, the OSRAM logo and Pictiva are trademarks and/or service marks of OSRAM Opto Semiconductors, Inc. Other brands or products are trademarks of their respective holders. OSRAM holds a license from Cambridge Display Technology to manufacture and sell polymer light emitting displays. The specifications contained in this document are subject to change without notice. OSRAM Opto Semiconductor, Inc. assumes no responsibility or liability arising out of the application or use of any legal information, product or service described herein except as expressly agreed to in writing by OSRAM Opto Semiconductors, Inc. Customers are advised to obtain the latest version of the device specifications before relying on any published information and before placing orders for products or services. All rights reserved. Lit# 543DS-1 updated on 12/19/05