

HIGH FREQUENCY MAGNETICS

T3/E3/STS-1 Through Hole Transformer

TM00147

- Operates at pulse repetition rates of 30 Mb/s to 60 Mb/s (includes both the DS3 and the STS-1 rate)
- Has three separate windings which can be configured for both 1:1 and 1:4 impedance ratios
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias


ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ± 2%	Inductance ² µH Min	DCR Ω max	Leakage Inductance ¹ µH max	Interwinding Capacitance pF min	For 75Ω:75Ω Configuration		Minimum Interwinding Breakdown Voltage Vrms
	(1-6):(2-5):(3-4)	(6-1)	(1-6) (2-5) (3-4)	(3-5)		Typical Bandwidth (3 dB)	Typical Pulse Rise Time (10%-90%)	
2745AM2	1:1:1	65	0.2	0.3	15	40 kHz to 260 MHz	1.4 ns	1500


- measured at 100 kHz, 0.01 Vac, connect 2 to 4
- measured at 10 kHz, 0.1 Vac

SCHEMATIC

2745AM2

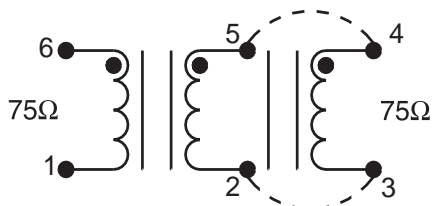

TYPICAL CONNECTION
75Ω : 75Ω

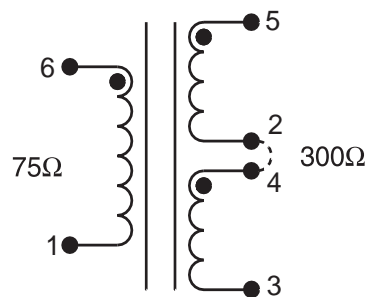


TYPICAL CONNECTION
75Ω : 300Ω

HIGH FREQUENCY MAGNETICS

T3/E3/STS-1 Through Hole Transformer

MECHANICAL

2745AM2

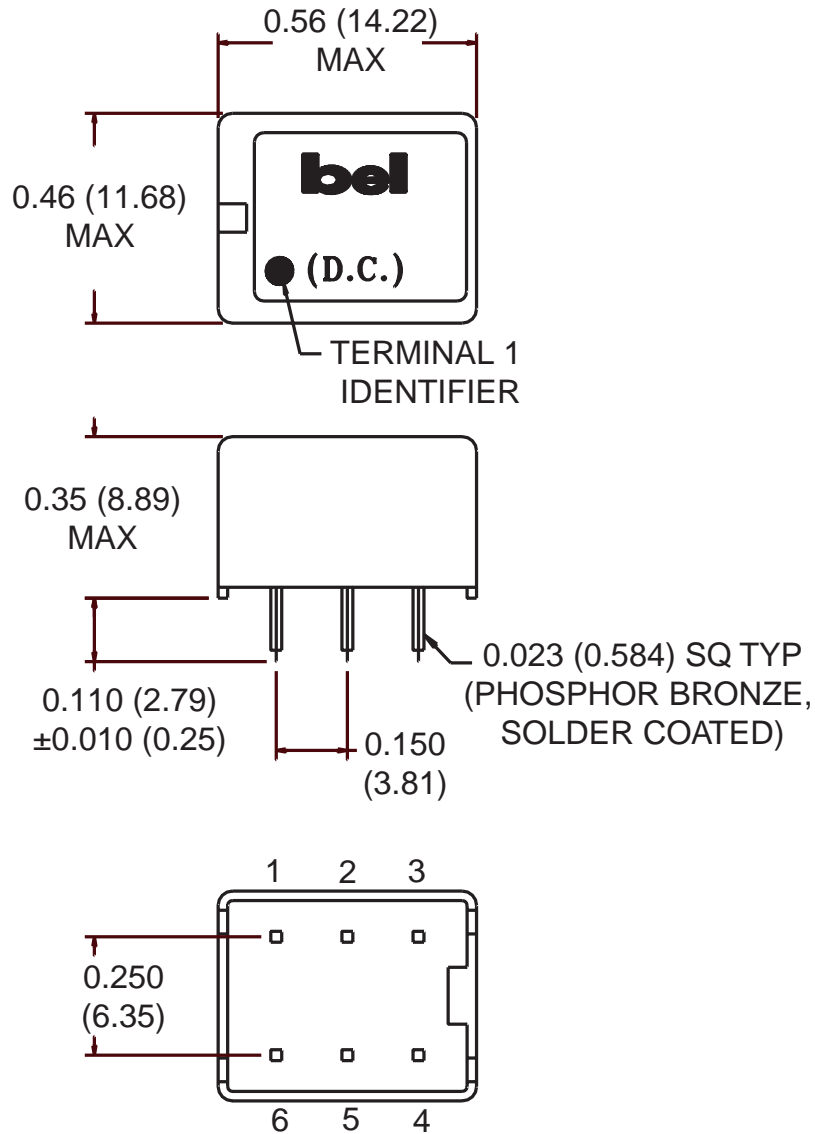

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

©2000 Bel Fuse Inc. Specifications subject to change without notice. 09.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

T1-112

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com