

HIGH FREQUENCY MAGNETICS

T1/E1 Through Hole Transformers

TM00116


- Designed to operate at the rate of 1.544 Mbits/s as a line interface pulse transformer
- Only difference between the 2745C and 2745C2 is the terminal length
- Operating temperature range: -40°C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C


Part Number	Nominal Turns Ratio ± 2%	Inductance ¹ µH Min	DCR Ω max		Leakage Inductance µH max	Interwinding Capacitance pF max	Minimum Interwinding Breakdown Voltage Vrms
	(3-1):(4-6)		(3-1)	(4-6)			
2745C	1 : 1.37 CT	680	1.0	1.4	1.2	85	850
2745C2	1 : 1.37 CT	680	1.0	1.4	1.2	85	850

1. measured at 10 kHz, 0.1 Vac

SCHEMATIC



MECHANICAL

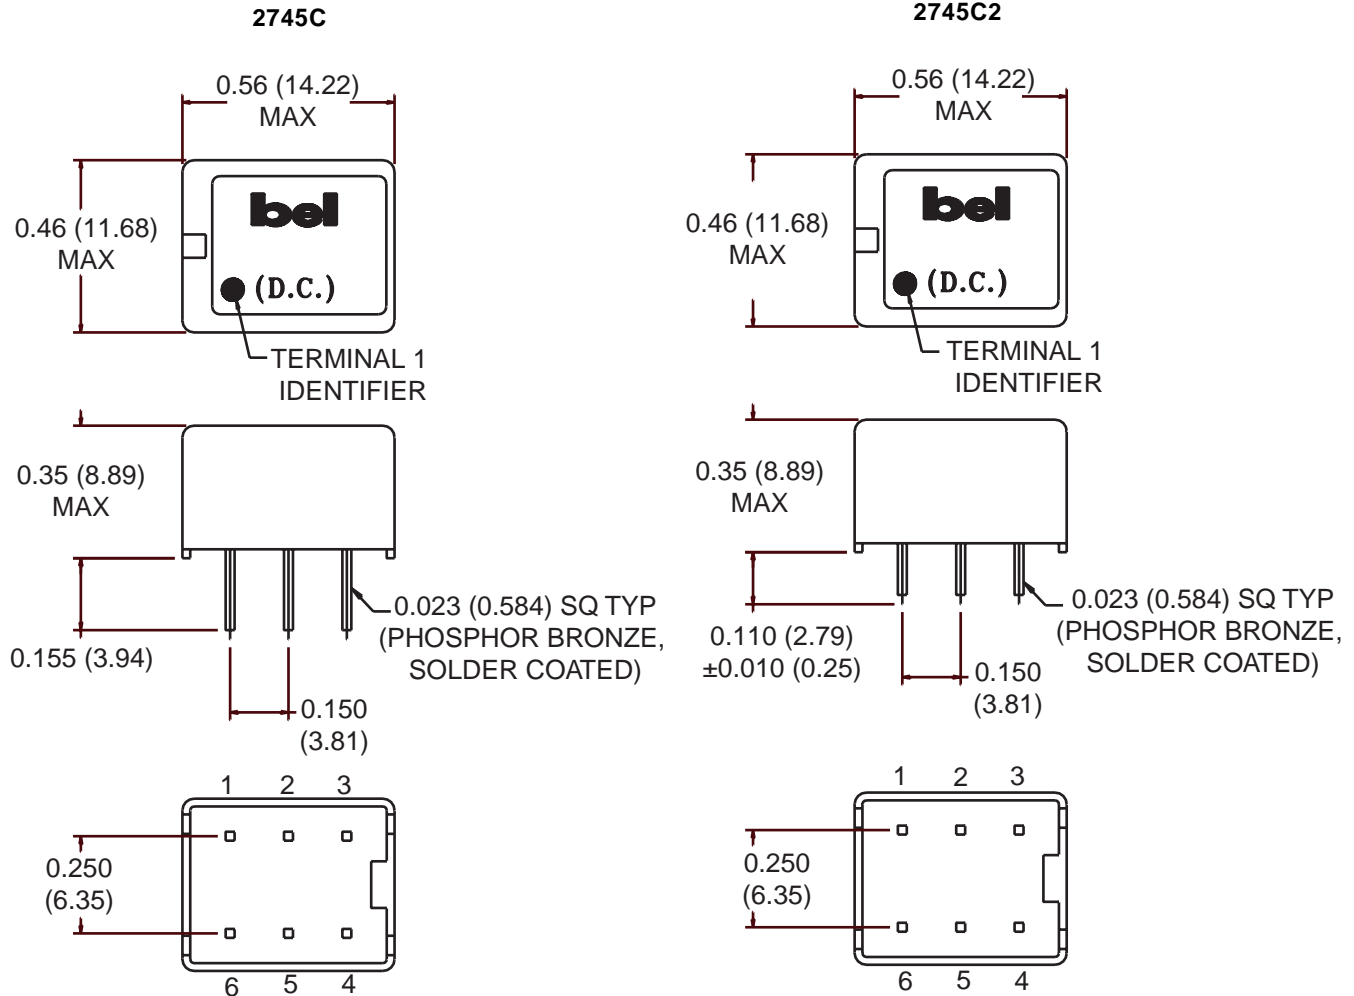

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

CORPORATE

Bel Fuse Inc.
 198 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

T1-38

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
 www.belfuse.com