F-206-1 SUPPLEMENT

SPECIFICATIONS

FILE NO. E111594

For complete specifications see www.samtec.com?SCC

Insulator Material:

Black Liquid Crystal Polymer Contact Material: Phosphor Bronze Current Rating: Testing Now!


Operating Temp Range: -55°C to +125°C Max Processing Temp:

230°C for 60 seconds Plating: Au or Sn over 50µ° (1,27µm) Ni SMT Lead Coplanarity: (0,10mm).004<sup>4</sup> max PoHS Compliant:

**RoHS Compliant:** 


Yes



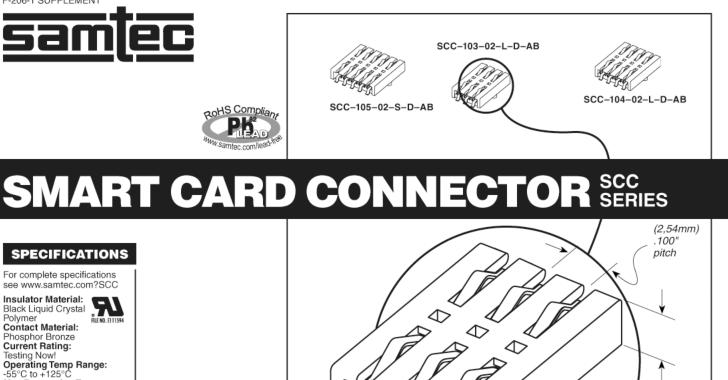

(3,00mm) 118" board spacing

Alignment pins

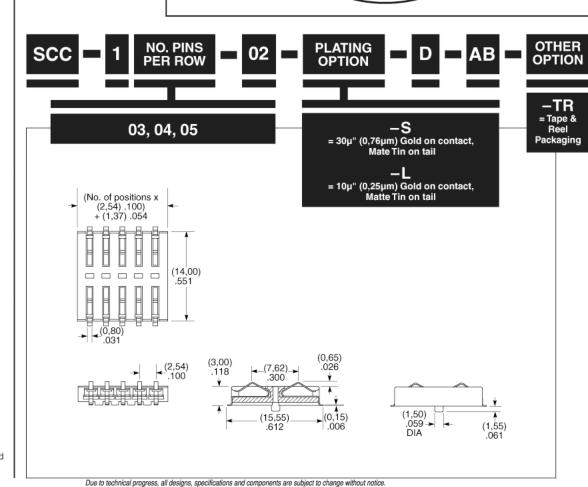

Note: Some sizes, styles and options are non-standard, non-returnable.

## WWW.SAMTEC.COM

SAMTEC USA • Tel: 1:800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047 SAMTEC (1408-395-5900 • Fax: 408-395-1520 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61 SAMTEC TIALY • Tel: 39 039 6890037 • Fax: 39 039 68900315 SAMTEC COMMINIANT • Tel: +48-84477280 • Fax: +46 87420413 SAMTEC GRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61 SAMTEC TIALY • Tel: 39 039 6890037 • Fax: 39 039 68900315 SAMTEC SCANDINAVIA • Tel: +48-84477280 • Fax: +46 87420413 SAMTEC GRANCE • Tel: 01 72-37526800 • Fax: 01 60 95 06 61 SAMTEC TIALY • Tel: 39 039 6890037 • Fax: 49 03 742013 • Fax: 49 4720413 • Fax: