




(2,00mm) .0787"

FCT, EMT SERIES

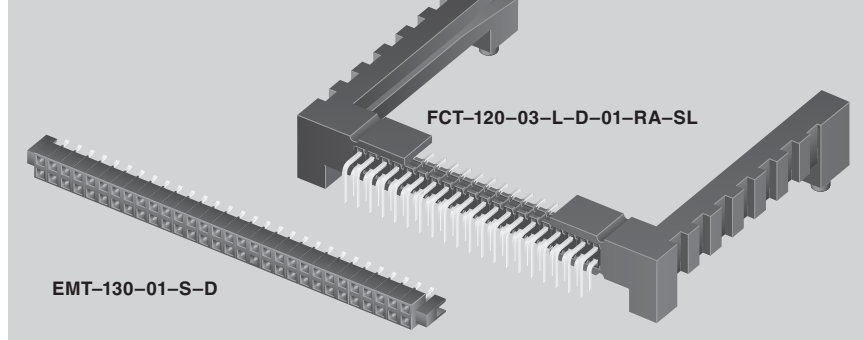

FLEXCARD™ TERMINAL & SOCKET STRIPS

Mates with:
EMT

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?FCT

Insulator Material:
Black Liquid Crystal Polymer



Terminal Material:
Phosphor Bronze

Current Rating:
3A @ 80°C ambient

Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold

Plating:
Sn or Au over
50µ" (1,27µm) Ni

RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Wave, or reflow with
Matte Sn plating

Note: Some lengths, styles and options are non-standard, non-returnable.

FCT - **1** **NO. PINS PER ROW** - **LEAD STYLE** - **PLATING OPTION** - **D** - **CARD SLOT** - **TAIL OPTION** - **SL**

20, 30 & 40
(Call Samtec for other sizes)

Specify **LEAD STYLE** from chart

-F
= Gold flash on post, Matte Tin on tail

-L
= 10µ" (0,25µm) Gold on post, Matte Tin on tail

-S
= 30µ" (0,76µm) Gold on post, Matte Tin on tail

-01
= Accepts (0,80mm) .031" thick card

-RA
= Right Angle
(Leave blank for vertical version. Style -02 only)

LEAD STYLE	Y	CARD-TO-BOARD SPACE (X)
-02	(6,35) .250	(2,60) .1025
-03	(9,53) .375	(5,78) .2275

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?EMT

Insulator Material:
Black LCP



Contact Material:
BeCu

Current Rating:
3A @ 80°C ambient

Operating Temp Range:
-55°C to +125°C

Plating:
Sn or Au over
50µ" (1,27µm) Ni

Contact Resistance:
10 mΩ max

Insertion Depth:
(3,05mm) .120" to
(3,30mm) .130"

Insertion Force:
-01=1.5oz (0,44N) average
-51=2.5oz (0,70N) average

Withdrawal Force:
-01=1.1oz (0,31N) average
-51=1.5oz (0,44N) average

Lead-Free Solderable:
Yes, with Matte Sn plating

SMT Lead Coplanarity:
(0,10mm) .004" max (20)
(0,15mm) .006" max (30-40)

RoHS Compliant:
Yes

EMT - **1** **NO. PINS PER ROW** - **CARD THICKNESS** - **PLATING OPTION** - **D**

20, 30, 40
(Call Samtec for other sizes)

-01
= (0,80mm) .031" thick board (Low Insertion Force)

-51
= (0,80mm) .031" thick board (Standard Insertion Force)

-L
= 10µ" (0,25µm) Gold on contact, Matte on tail

-S
= 30µ" (0,76µm) Gold on contact, Matte Tin on tail

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 8890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292 SAMTEC ISRAEL • Tel: 972-3-7526600
 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766 SAMTEC TAIWAN • Tel: 886-2-2735-6109
 Downloaded from Elcodis.com electro SAMTEC HONG KONG • Tel: 852-2680-9858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9512 7747 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112