



## Chip Multilayer Antennas



LDA2H Series

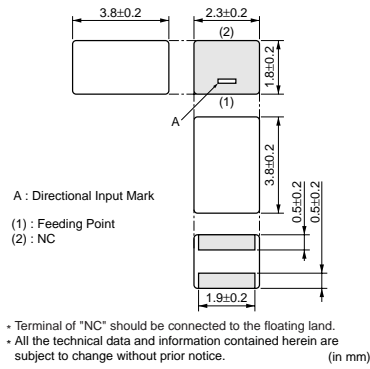

LDA31 Series

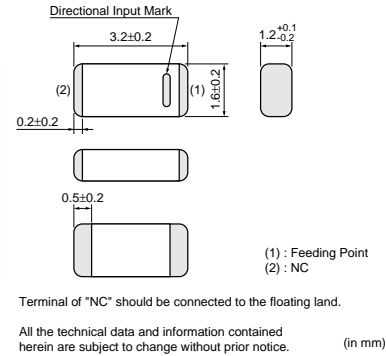


Part Number	Nominal Center Frequency at Input V.S.W.R (f <sub>0</sub> ) (MHz)	Tolerance of Center Frequency at Input V.S.W.R (MHz)	Nominal Impedance (ohm)	Power Capacity (mW)
LDA2H2G6540G-254	2650.0	2650.0 ±58 MHz	50	500 max.
LDA312G7313F-237	2730.0	2730.0 ±68.0 MHz	50	500 max.
LDA312G8513F-238	2850.0	2850.0 ±72.0 MHz	50	500 max.
LDA312G9813F-239	2980.0	2980.0 ±75.0 MHz	50	500 max.
LDA313G0313F-240	3030.0	3030.0 ±76.0 MHz	50	500 max.
LDA313G1413F-241	3140.0	3140.0 ±79.0 MHz	50	500 max.
LDA313G2713F-242	3270.0	3270.0 ±82.0 MHz	50	500 max.
LDA313G3313F-243	3330.0	3330.0 ±84.0 MHz	50	500 max.
LDA313G5813F-244	3580.0	3580.0 ±90.0 MHz	50	500 max.
LDA313G8813F-245	3880.0	3880.0 ±98.0 MHz	50	500 max.
LDA315G2013F-246	5200.0	5200.0 ±135.0 MHz	50	500 max.
LDA315G5013F-247	5500.0	5500.0 ±143.0 MHz	50	500 max.
LDA315G8013F-248	5800.0	5880.0 ±151.0 MHz	50	500 max.
LDA316G0013F-249	6000.0	6000.0 ±157.0 MHz	50	500 max.
LDA316G2013F-250	6200.0	6200.0 ±162.0 MHz	50	500 max.
LDA317G8013A-251	7800.0	7800.0 ±225.0 MHz	50	500 max.

Operating Temperature: -40°C to +85°C


## Chip Dielectric Antennas



ANCG12G44SAA129

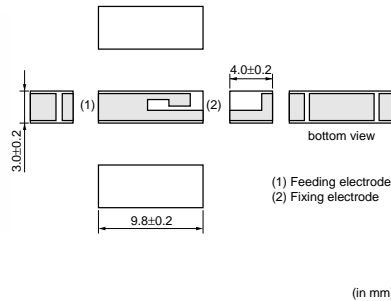


ANCM11G57SAA089

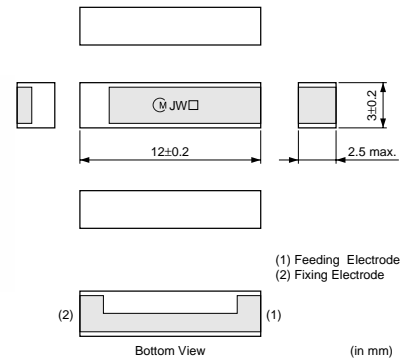

Continued on the following page.

Continued from the preceding page.

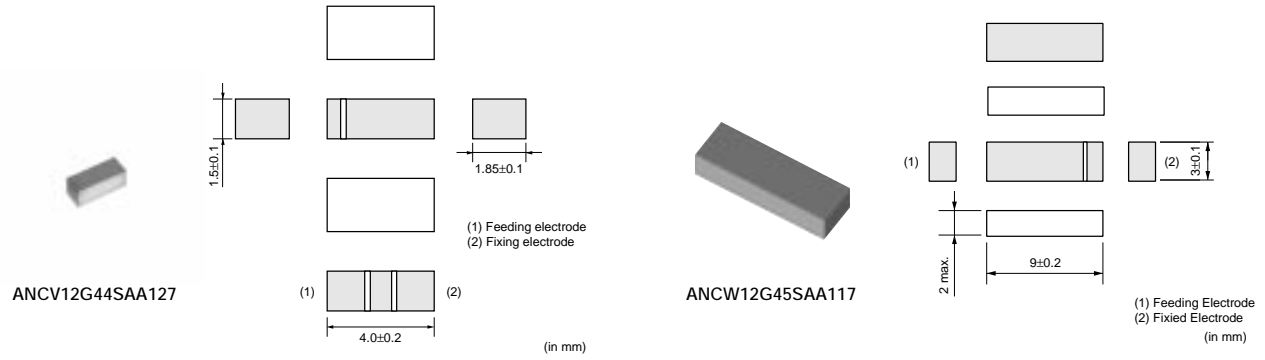

Part Number	Fo (MHz)	Bandwidth (MHz)	VSWR (max.)
<b>ANCG12G44SAA129</b>	2442.0	68	3.0
<b>ANCM11G57SAA089</b>	1575.42	2	3.0
<b>ANCM12G45SAA075</b>	2450.0	100	2.5
<b>ANCV12G44SAA127</b>	2442.0	84	3.5
<b>ANCW12G45SAA117</b>	2450.0	100	2.5

ANCG series are available on ground plane. Please contact us for detail specifications.