
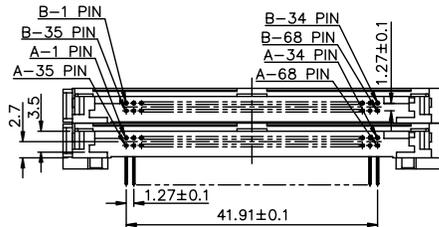
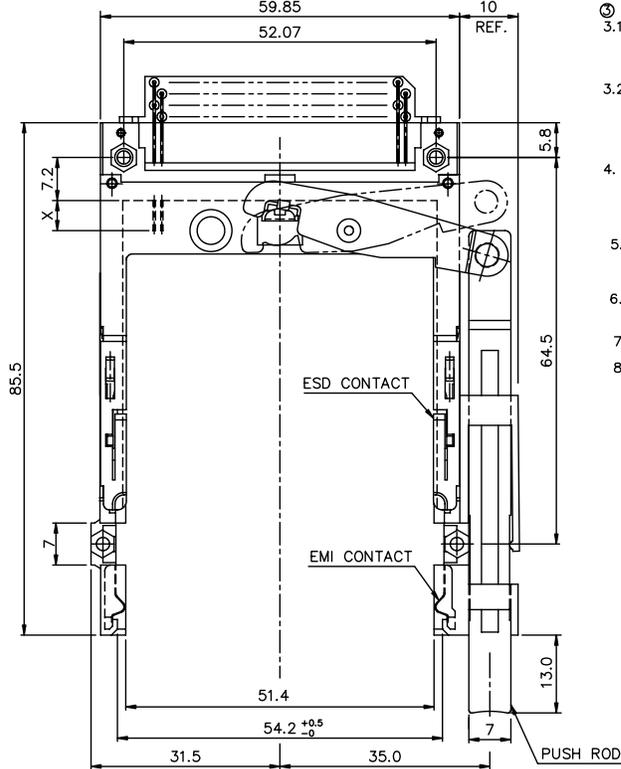


PRODUCT NO.
61848-220CA/220CALF

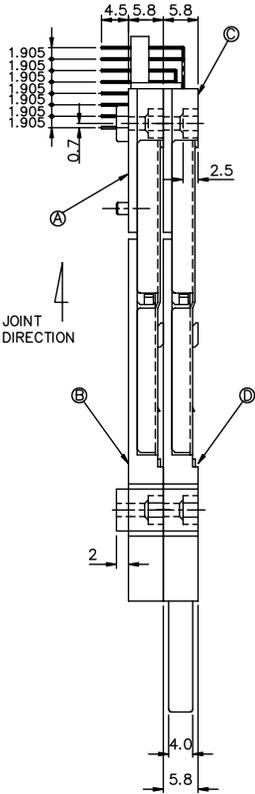


NOTES:

- EJECT FORCE : 3.5 Kg MAX.
- EJECT TRAVEL: 8.0mm
- MATERIAL
 - PART (A) AND (C) (HEADER ASS'Y)
PLASTIC : HOUSING ...LCP UL94V-0 BLACK
LOCATOR ...G.F. 6/6 NYLON UL94-V0 BLACK
 - PART (B) AND (D) (EJECT MECHANISM ASS'Y)
PLASTIC : GUIDE; POLYPHTHARAMID UL94V-0 BLACK
PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER 0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb
 : 2.5 um MIN. PURE Sn (FOR -*****LF)

DIM "X"	4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68	

- IF LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- IF LEAD FREE P/N, THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

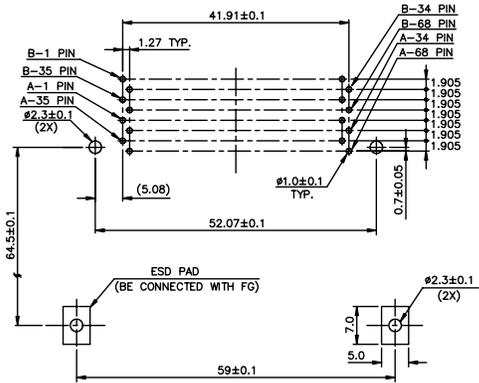

4 CARD INSERTION DIRECTION

mat'l code	tolerance unless otherwise specified	CUSTOMER COPY	FCI ELECTRONICS	
rev. ecn no. dr date	linear ±0.30	projection	title	
A T70129 WL 04/02/97	angles ±2°	unit	68P DOUBLE EJECTOR HEADER ASS'Y FOR TYPE 1/2/3	
B T00288 WL 09/18/00	dr C M HSU 03/04/97	mm/inch	product family : PCMCIA	code
C N05-0192 WB 07/04/08	enrg JOSEPH HSIA 03/04/97	size	dwg no.	TWN
	chr JOSEPH HSIA 03/04/97	scale 1.5:1	A3	61848
	appd JENN TASO 03/04/97			sheet 1 of 2
sheet revision	C C			
index sheet	1 2			

PDM: Rev:C STATUS Released Printed: Oct 12, 2010

Tous droits réservés. Toute réimpression ou communication à des tiers sans autorisation écrite de FCI ELECTRONICS est formellement interdite. FCI ELECTRONICS

All rights reserved. Reproduction or issue to third parties in any form without the written authority from the proprietor. FCI ELECTRONICS

