

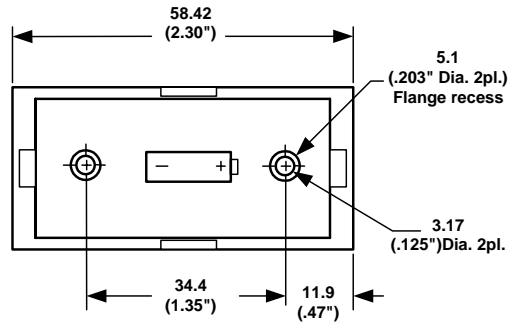
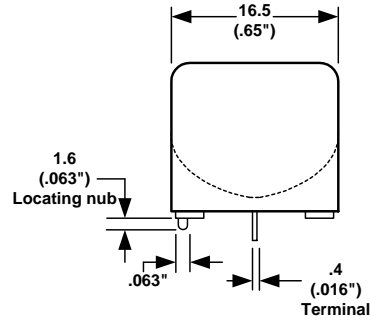


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

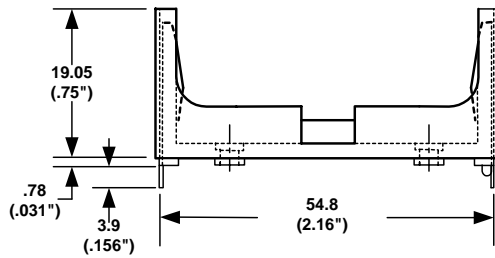

Standard Pc Version P.C. Board Hole layout

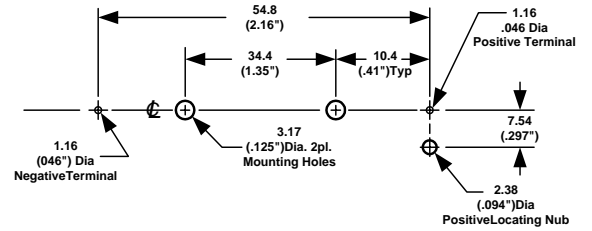


SPECIFICATIONS

Material:
 Holder Self extinguishing thermoplastic, PBT, black
 Flammability Rating UL94 V-O, File No. E88499 (M)
 Dielectric Strength 560 volts/ mil at 25°C for 5 sec.
 Temperature Range -55°C to 180°C.
 Resistance to Solvent Xylene, Ethyl, Butyl, Methyl, Propyl alcohol, Ethyl acetate, Refrigerants, Heptane & Toluene.
Contacts 302 Spring Tempered Stainless Steel Nickel Plated
Weight 18 Grams

NOTE:
 Eyelet Stimpson Style # A1883 .110"OD. x .190"flange
 Flange recess .203" Dia. X .090" deep
 Accepts standard 2-56 machine screws

Accessories: BI - UM - 3 - 4 Insulator,

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020)			APPROVED BY
FRACTIONAL	TITLE	"AA" CELL BATTERY HOLDER	
+ .8 (.030)			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	11/03/01	BHAA	