

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect




Midcom

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	5-4	@20°C
D.C. RESISTANCE	FL1-FL2	@20°C
D.C. RESISTANCE	FL3-FL4	@20°C
D.C. RESISTANCE	1-2	@20°C
INDUCTANCE	5-4	10kHz, 100mVAC, Ls
LEAKAGE INDUCTANCE	5-4	tie(1+2, FL1+FL2+FL3+FL4), 100kHz, 100mVAC, Ls
DIELECTRIC	5-FL1	tie(FL2+FL3), 4.5kV, 1 minute
URNS RATIO		(5-4):(FL1-FL2)
URNS RATIO		(5-4):(FL3-FL4)
URNS RATIO		(5-4):(1-2)

GENERAL SPECIFICATIONS:  
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.  
 Designed to comply with the following requirements as defined by IEC81558-2-17:  
 - Reinforced insulation for a primary circuit at a working voltage of 400VDC.

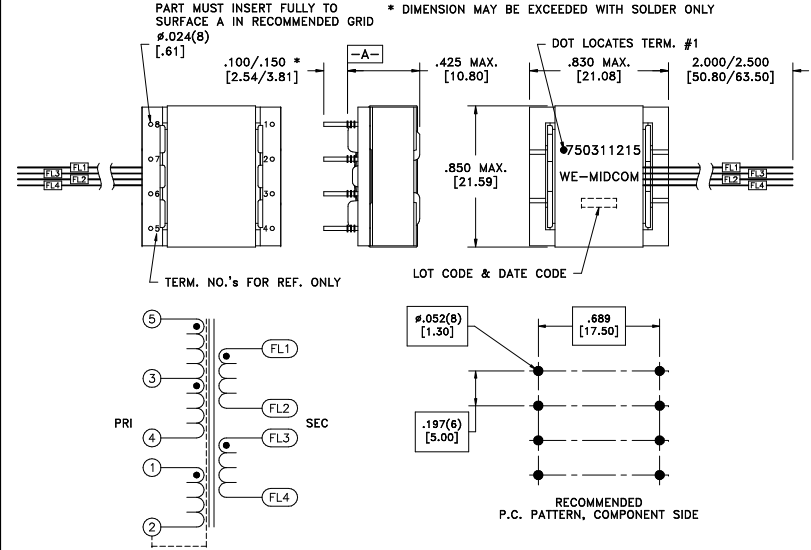

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 Footprint: ±.001	DRAWING TITLE	PART NO.
		Method: Tray PKG-0058 www.midcom-inc.com			<b>TRANSFORMER</b>	<b>750311215</b>
6A	3/10	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eISos p/n: 750311215	SPECIFICATION SHEET 1 OF 1

