




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%Ag4%	Yes	Yes

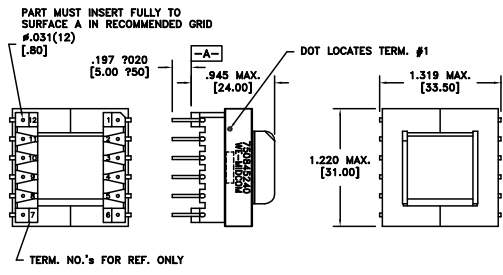

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	tbd ohms max.
D.C. RESISTANCE	5-6 @20°C	tbd ohms max.
D.C. RESISTANCE	12-10 tie(12+11), @20°C	tbd ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	2.60mH ±10%
LEAKAGE INDUCTANCE	1-3 tie(8+5, 9+10+11+12), 100kHz, 100mVAC, Ls	50 uH max.
DIELECTRIC	1-12 tie(3+5), 4500VAC, 1 second	3600VAC, 1 minute
DIELECTRIC	1-11 tie(3+5), 4500VAC, 1 second	3600VAC, 1 minute
URNS RATIO	(1-3):(12-10)	11.428:1, ±3%
URNS RATIO	(1-3):(11-9)	11.428:1, ±3%
URNS RATIO	(1-3):(5-6)	17.778:1, ±3%

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE
02	9/09

DETAILS SUBJECT TO CHANGE

Packaging Specifications Method: Tray PKG-0504 www.midcom-inc.com	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [127]	DRAWING TITLE TRANSFORMER	DRAWING NO. 750845240
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750845240	REVISIONS: SEE SHEET 1

