

3000 SERIES

http://www.noritake-elec.com/3000_series.htm




ISO 9001 and ISO 14000 Certified

Dot matrix display

- Vibrant and bright display.
- Display characters anywhere on the screen.
- Display bitmap images.
- Invert screen.
- Separate into 4 independently controlled windows.

Use it vertically or horizontally


- Display vertically or horizontally using bitmap images.
- Icon or text position can be positioned to match the membrane switch.

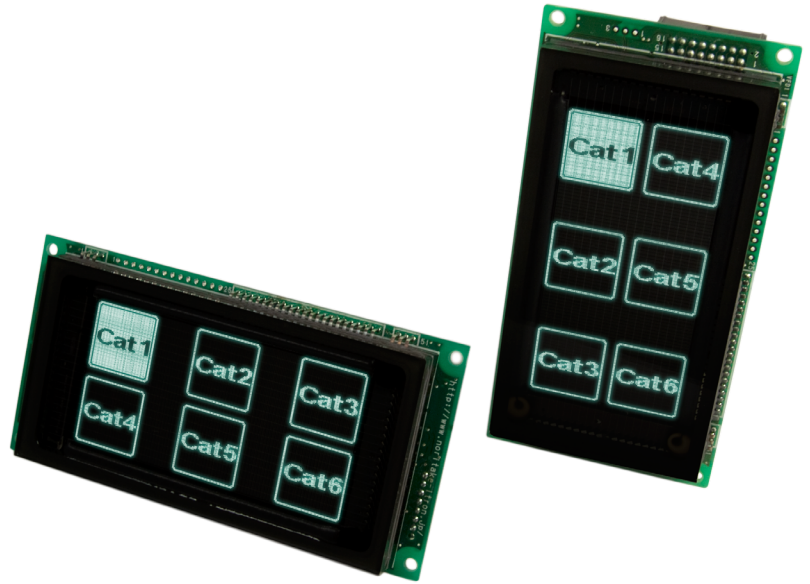

More characters

3000 Series offers VFD modules capable of displaying many characters.

- GU128X128D-3900B can display 336 (21 x 16) characters.
- GU256X32D-3900 can display 168 (42 x 4) characters.
- GU256X64C-3900B can display 336 (42 x 8) characters.
- GU256X128C-3900B can display 672 (42 x 16) characters.
- GU320X32D-3900 can display 212 (53 x 4) characters.

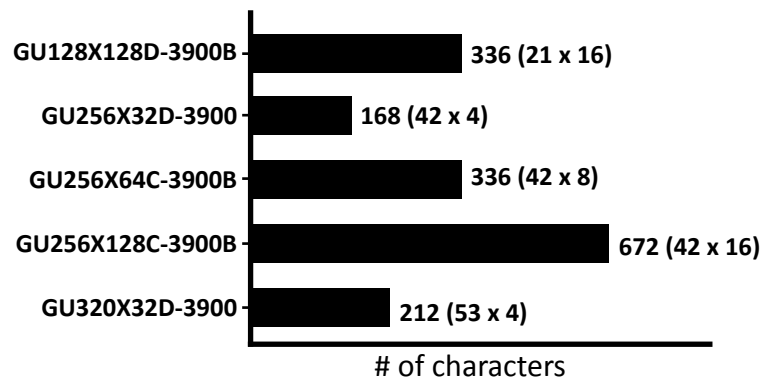


Large characters

3000 Series offers VFD modules with larger characters which can be read from further away.

- GU256X16M-3900B, 13 mm character height.
- GU384X32L-3900, 12 mm character height.
- GU512X32H-3900B, 6 mm character height.

3000 Series has multiple font sizes and display even larger characters.

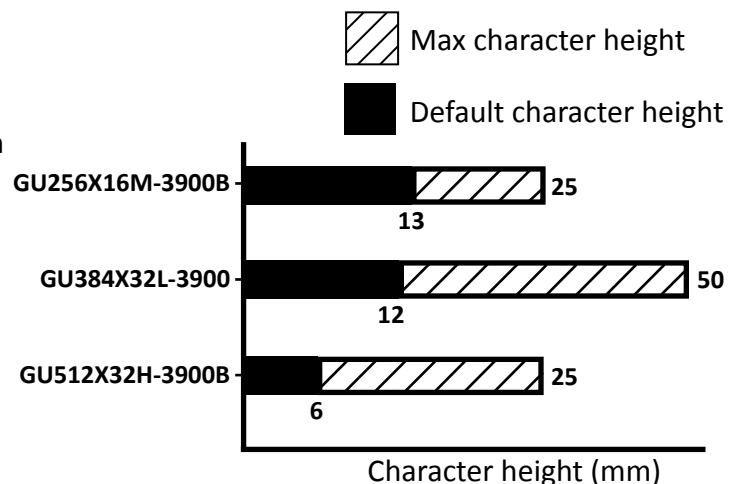


More features

- GPIO (General purpose I/O)
- Flash memory.
- Built-in ASCII and international font tables.
- Built-in Japanese, Korean and Chinese font tables.
- LED backlight model GU512X32H-3940
Emits red, green and blue color with 16 brightness level settings each.



Included font tables
ASCII
Extended ASCII
International
Japanese
Korean
Simplified Chinese
Traditional Chinese

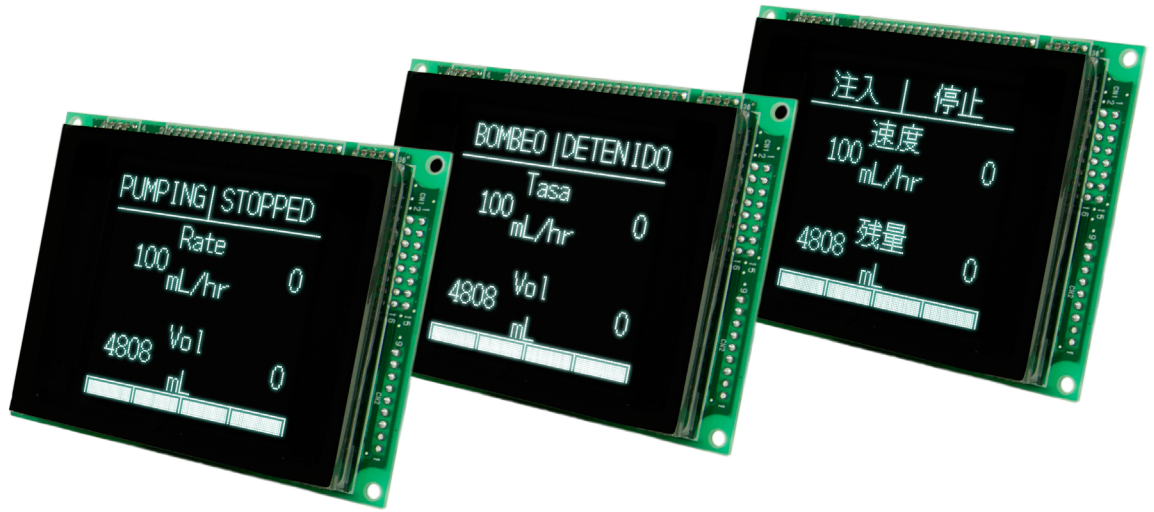

Part Number	Number of Characters	Display Bitmap	Character Height (mm)	Display Size (mm)	PCB Size (mm)	Interface	Power Supply Typical	Notes		
New GU128X128D-3900B	21 x 16	128 x 128	3	51.1 x 51.1	96.5 x 75.0	CMOS parallel RS232 async serial	5V / 700 mA	GPIO (General purpose I/O) Flash memory		
New GU256X16M-3900B	42 x 2	256 x 16	13	307.0 x 25.4	372.0 x 49.0		5V / 50 mA 24V / 240 mA			
GU256X16M-3900						5V / 80 mA 24V / 270 mA				
GU256X32D-3900	42 x 4	256 x 32	3	115.1 x 14.3	159.0 x 35.0	5V / 450 mA				
New GU256X64C-3900B	42 x 8	256 x 64	2	83.1 x 20.7	133.0 x 38.0	5V / 430 mA				
GU256X64C-3900						5V / 850 mA				
New GU256X64D-3900B							3		115.1 x 28.7	159.0 x 50.0
GU256X64D-3900							5V / 1160 mA			
New GU256X64E-3900B						4			140.7 x 35.1	188.0 x 62.0
GU256X64E-3900	5V / 1160 mA									
GU256X64F-3101		5	166.3 x 41.5	226.0 x 70.0	USB	24V / 280 mA	USB Flash memory			
GU256X64F-3900	42 x 16	256 x 128	3	83.1 x 41.5	131.0 x 66.0	CMOS parallel RS232 async serial	5V / 850 mA	GPIO Flash memory		
New GU256X128C-3900B							5V / 1200 mA			
GU256X128C-3900						5V / 100 mA 12V / 1000 mA				
New GU256X128D-3900B								3	115.1 x 57.5	170.0 x 90.0
GU256X128D-3900							5V / 100 mA 24V / 380 mA			
GU256X128E-3900	4	140.7 x 70.3	214.0 x 110.0							
GU256X128E-3910	5V / 100 mA 24V / 380 mA									
GU320X32D-3900		53 x 4	320 x 32	3	143.9 x 14.3	189.0 x 33.0	5V / 480 mA			
GU384X32L-3900	64 x 4	384 x 32	12	468.2 x 50.3	551.0 x 91.0	5V / 80 mA 24V / 650 mA				
New GU512X32H-3900B	85 x 4	512 x 32	6	307.0 x 25.4	372.0 x 49.0	5V / 50 mA 24V / 240 mA	LED backlight Flash memory			
GU512X32H-3900						5V / 80 mA 24V / 270 mA				
GU512X32H-3940						5V / 110 mA 24V / 250 mA				

Noritake Co., Inc.
 Electronics Division Headquarter
 2635 Clearbrook Drive
 Arlington Heights, IL 60005
 Toll free: (800) 779 - 5846
 Phone: (847) 439 - 9020
 support.ele@noritake.com
www.noritake-elec.com

East Coast
New Jersey Branch
 15-22 Fair Lawn Ave.
 Fair Lawn, NJ 07410
 Toll free: (888) 296 - 3423
 Phone: (201) 475 - 5200
 Fax: (201) 796 - 2269

Midwest, Canada, and Mexico
Chicago Branch
 2635 Clearbrook Dr.
 Arlington Heights, IL 60005
 Toll free: (800) 779 - 5846
 Phone: (847) 439 - 9020
 Fax: (847) 593 - 2285

West Coast
Los Angeles Branch
 21081 S. Western Ave. Ste 180
 Torrance, CA 90501
 Toll free: (888) 795 - 3423
 Phone: (310) 320 - 1700
 Fax: (310) 320 - 2900

Noritake itron
 The brighter side of electronics

E-M-0035-01