


NO	DESCRIPTION	DATE
△	REDUCE SPRING FROM 2PCS TO 1 PC	06.06.97
△	BACKGROUND FORMAT UPDATED	07.08.02'
△	BACKGROUND FORMAT UPDATED	11.18.08'

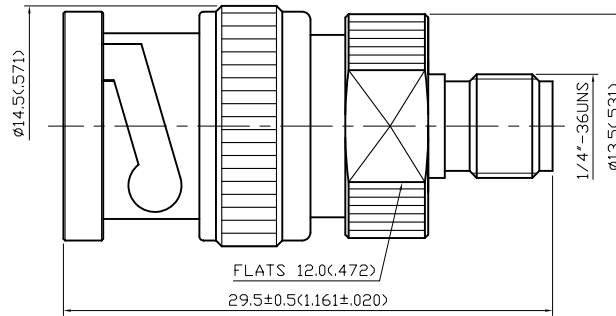

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1000 VOLTS
- 1.5 VSWR: 1.3 MAX.

**2.0 MATERIALS**

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

**3.0 FINISHES AND OTHERS**

- 3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 MECHANICAL**

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

**5.0 ENVIRONMENTAL**

- 5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C

9	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
8	BODY	BRASS	1	NICKEL 100μ" MIN.
7	WASHER	BRASS	1	NICKEL
6	SPRING WASHER	SK-5	1	NICKEL
5	GASKET	RUBBER	1	RED
4	WASHER	BRASS	1	NICKEL
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		SMA JACK-BNC PLUG	
製圖	DRAWN <i>Yoko</i>	TOLERANCE	品名 19-38-1 T.G.N
檢圖	CHECK <i>Lewis</i>	.X ±0.2 .XX ±0.1 .XXX ±0.05	ROHS COMPLIANT (50Ω) DATE 11.27.95' 版次 A-3
認定	APPROVAL <i>Lewis</i>	ANGLE ±5°	UNIT mm(in) DWG.NO. 19-0136
		SCALE 4:1	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.