

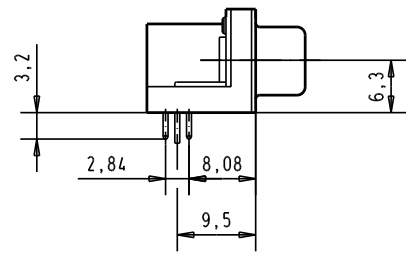
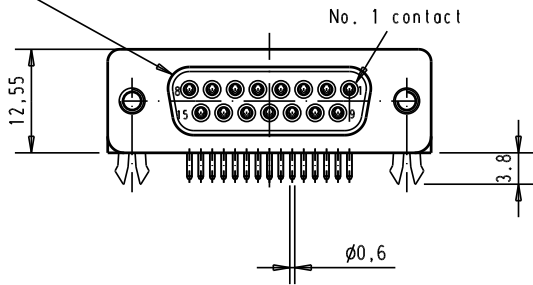


Alle Rechte vorbehalten / All rights reserved

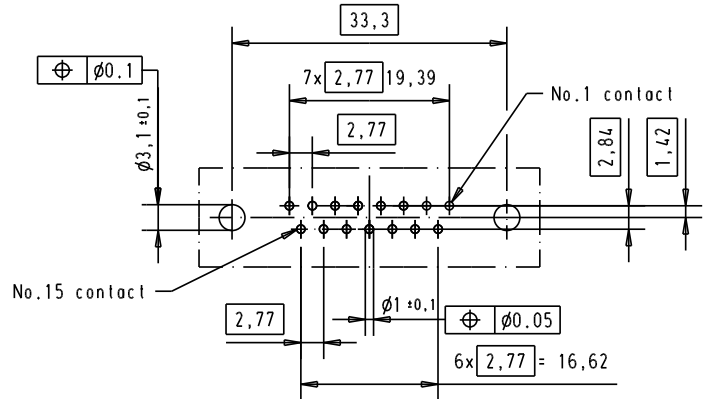

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

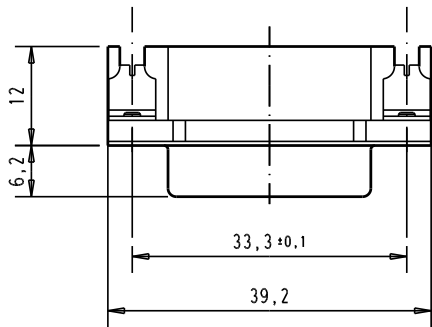

Printed board layout (1,6±0,2 thick)
View component side



Connector insertion force on PCB = maxi 80 N

							Del.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub female connector, US Footprint, 15 poles with solder pins, nuts and grounding board lock	Maßstab/ Scale
							Detail: 28-FEB-02	CV			1,5:1
09 68 253 7611	M3	3					Insp.		 Sub.	TB 09 68 253 X61X	Blatt / Page 1 /
09 68 253 5611	M3	0,76 µm Au				Stand.					
09 68 253 7612	4-40 UNC	3	32121	29-JUN-04	TR						
09 68 253 5612	4-40 UNC	0,76 µm Au	29751	28-FEB-01	CV						
Part number	nut thread	Performance level	Mod.	Del.	Name	HARTING EURL F-95972 Paris					