- o Check Distributor Inventory
- Find Authorized Distributors

# . My Account


- o Sign In
- o Register

# . Customer Support

- o Support
- o RoHS Support Center
- o Glossary of Terms
- o eBulletin Newsletter

Home > Products > By Type > Power Products (>10 Amps/Contact) > Product Feature Selector > Product Details

# 201358-3 Product Details

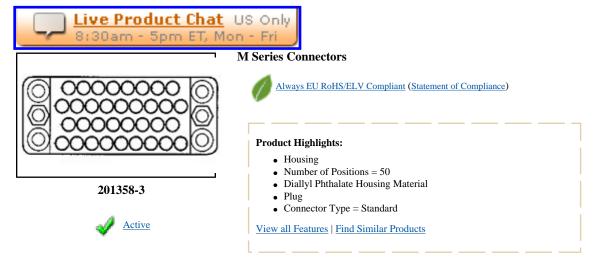

**Documentation & Additional Information** 

Quick Links

- Check
  Pricing &
  Availability
- Search for Tooling
- Product
  Feature
  Selector
- Contact Us
  About This
  Product

## **Product Drawings:**

• BLOCK, MALE, 50 POSN, MINIATURE RECTANGULAR, M SERIES (PDF, English)

## Catalog Pages/Data Sheets:

• M SERIES PIN AND SOCKET CONNECTORS (PDF, English)

#### **Product Specifications:**

• None Available

## **Application Specifications:**

• Ferrules For M Series Connectors (PDF, English)

#### **Instruction Sheets:**

- AMP\* 20 HVC, 34 AND 50 POSITION SERIES "M" CONNECTOR (PDF, English)
- LATCHING SHIELD AND PIN HOOD FOR 50 POSITION "M" S... (PDF, English)

## CAD Files: (CAD Format & Compression Information)

- 2D Drawing (DXF, Version T)
- 3D Model (IGES, Version T)
- 3D Model (STEP, Version T)

#### **Additional Information:**

• Product Line Information

#### **Related Products:**

Tooling

## List all Documents

# Product Features (Please use the Product Drawing for all design activity)

## **Product Type Features:**

- Product Type = Housing
- Number of Positions = 50
- Gender = Plug
- Connector Type = Standard
- Mount = Free Hanging, Panel Mount
- Comment = Housing accepts type II, type III+ and Subminiature Coaxicon contacts.; Pins and/or sockets may be used in any housing.; Housing cavity identification are mirror image.

## **Mechanical Attachment:**

• Mounting Hardware = None

# **Electrical Characteristics:**

• <u>High Voltage</u> = No

# **Body Related Features:**

• Center Fastener = No

#### **Housing Related Features:**

- Housing Material = Diallyl Phthalate
- Housing Color = Blue

#### **Industry Standards:**

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- <u>Lead Free Solder Processes</u> = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### **Packaging Related Features:**

• Packaging Method = Loose Piece

#### Other:

• Brand = AMP

Provide Website Feedback | Contact Customer Support

Home | Customer Support | Suppliers | Site Map | Privacy Policy | Browser Support

© 2008 Tyco Electronics Corporation All Rights Reserved