


Connectors for Copper Conductor

Two-Hole Lugs — Standard Barrel 600V to 35KV

Material: High-Conductivity Wrought Copper

Finish: Electro Tin Plate

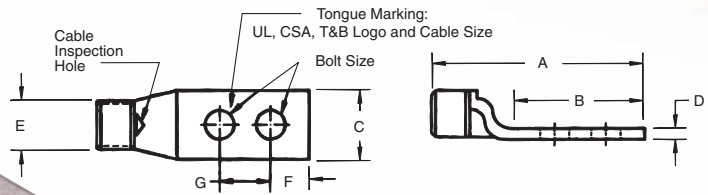

Color-Keyed Compression

| CAT. NO. | CODE | WIRE SIZE | | | DIMENSIONS (IN.) | | | | | | | DIE CODE | DIE COLOR |
|----------------|------------|---------------------------------|----------------|-----------|------------------|------|-----|-----|-----|---|-----|----------|-----------|
| | | FLEX CLASS | G, H, I, K, M† | BOLT SIZE | A | B | C | D | E | F | G | | |
| 54201 | #14-10 AWG | | | ¼ | 1.86 | 1.19 | .50 | .05 | .20 | ¼ | ¾ | ERG2002 | YELLOW |
| 256-30695-1302 | | | | ¾ | 2.48 | 1.81 | .56 | .04 | .22 | ¾ | 1 | ERG2002 | YELLOW |
| 54204 | #10 | | | #10 | 1.88 | 1.18 | .42 | .08 | .26 | ¼ | ¾ | 21 | RED |
| 256-31426-33* | | | | #10 | 1.88 | 1.18 | .41 | .06 | .26 | ½ | ¾ | 21 | RED |
| 256-31426-33PH | 8 AWG | 23 Navy | | #10 | 1.88 | 1.18 | .41 | .06 | .26 | ½ | ¾ | 21 | RED |
| 542040410 | | #8 Weld | | ¼ | 2.01 | 1.31 | .42 | .08 | .26 | ¼ | ¾ | 21 | RED |
| 542040416 | | 37/24 = 14.9 kcmil | | ¼ | 2.38 | 1.68 | .42 | .08 | .26 | ¼ | 1 | 21 | RED |
| 256-30695-1094 | | | | ¼ | 2.50 | 1.81 | .56 | .05 | .26 | ¼ | ¾ | 21 | RED |
| 256-30695-251 | | | | ¾ | 2.50 | 1.81 | .56 | .05 | .26 | ¾ | 1 | 21 | RED |
| 256-30695-1070 | | | | #12 | 1.81 | 1.19 | .44 | .11 | .30 | ¼ | ½-¾ | 24 | BLUE |
| 256-30695-1153 | | | | #10 | 1.98 | 1.28 | .44 | .08 | .30 | ¼ | ¾ | 24 | BLUE |
| 256-30695-1183 | | | | #10 | 1.98 | 1.19 | .44 | .08 | .30 | ½ | ¾-¾ | 24 | BLUE |
| 54205 | #6 AWG | 30 Navy | | ¼ | 1.98 | 1.28 | .44 | .08 | .30 | ¼ | ¾ | 24 | BLUE |
| 256-30695-1095 | | #6 Weld | | ¼ | 2.13 | 1.31 | .43 | .08 | .30 | ¼ | ¾ | 24 | BLUE |
| 256-30695-252 | | 61/24 = 24.6 kcmil | | ¼ | 2.38 | 1.63 | .43 | .08 | .30 | ¼ | 1 | 24 | BLUE |
| 256-30695-372 | | 133/.014 | | ¼ | 2.13 | 1.43 | .43 | .08 | .30 | ¼ | ¾ | 24 | BLUE |
| 256-30695-913 | | | | ¼ | 2.38 | 1.75 | .43 | .08 | .30 | ¼ | 1 | 24 | BLUE |
| 256-30695-253 | | | | ¾ | 2.58 | 1.81 | .55 | .08 | .30 | ¾ | 1 | 24 | BLUE |
| 54206 | #4 AWG | 40-50 Navy | | ¼ | 2.03 | 1.28 | .52 | .10 | .37 | ¼ | ¾ | 29 | GRAY |
| 256-30695-1184 | | 91/24 = 36.7 kcmil | | ¾ | 2.31 | 1.63 | .52 | .10 | .37 | ¾ | 1 | 29 | GRAY |
| 256-30695-255 | | 133/.0177, 49/.029 | | ¾ | 2.56 | 1.81 | .59 | .09 | .37 | ¾ | 1 | 29 | GRAY |
| 54207 | | | | ¼ | 2.13 | 1.28 | .59 | .11 | .41 | ¼ | ¾ | 33 | BROWN |
| 256-30695-1355 | #2 AWG | 60 Navy | | ¼ | 2.15 | 1.31 | .59 | .13 | .41 | ¼ | ¾ | 33 | BROWN |
| 256-30695-1185 | | 125/24 = 50.4 kcmil | | ¼ | 2.38 | 1.53 | .59 | .11 | .41 | ¼ | 1 | 33 | BROWN |
| 256-30695-257 | | #4 Weld | | ¾ | 2.67 | 1.81 | .60 | .1 | .41 | ¾ | 1 | 33 | BROWN |
| 256-30695-1049 | | | | ½ | 3.75 | 2.88 | .75 | .09 | .41 | ¾ | 1¼ | 33 | BROWN |
| 54208 | #1 AWG | 75 Navy | | ¼ | 2.13 | 1.28 | .68 | .11 | .47 | ¼ | ¾ | 37 | GREEN |
| 256-30695-1233 | | 150/24 = 60.5 kcmil | | ¾ | 2.69 | 1.62 | .69 | .13 | .47 | ½ | 1 | 37 | GREEN |
| 256-30695-1236 | | 175/24 = 70.6 kcmil, 133/.0223 | | ¾ | 2.75 | 1.81 | .68 | .11 | .47 | ¾ | 1 | 37 | GREEN |
| 256-30695-329 | | | | ¼ | 2.75 | 1.81 | .75 | .14 | .52 | ¾ | ¾ | 42 | PINK |
| 54255 | 1/0 AWG | 100 Navy | | ¾ | 2.56 | 1.56 | .75 | .14 | .52 | ¾ | ¾ | 42 | PINK |
| 256-30695-1234 | | #1 Weld | | ¾ | 2.75 | 1.78 | .75 | .14 | .52 | ½ | 1 | 42 | PINK |
| 54209 | | 225/24 = 90.8 kcmil | | ¾ | 2.88 | 1.93 | .75 | .13 | .52 | ¾ | 1 | 42 | PINK |
| 256-30695-1265 | | 133/.0254 | | ¾ | 3.50 | 2.57 | .75 | .14 | .52 | ¾ | 1¼ | 42 | PINK |
| 256-30695-886 | | | | ½ | 3.78 | 2.83 | .75 | .13 | .52 | ½ | 1¼ | 42 | PINK |
| 256-30695-1175 | 2/0 AWG | 125 Navy | | ¼ | 2.45 | 1.44 | .83 | .14 | .57 | ¼ | ¾ | 45 | BLACK |
| 54261 | | 1/0 Weld | | ¾ | 2.70 | 1.63 | .83 | .14 | .57 | ½ | ¾ | 45 | BLACK |
| 256-30695-832 | | 275/24 = 111 kcmil | | ¾ | 2.88 | 1.81 | .81 | .14 | .57 | ¾ | 1 | 45 | BLACK |
| 54210 | | 133/.0282 | | ¾ | 2.93 | 1.93 | .83 | .13 | .57 | ¾ | 1 | 45 | BLACK |
| 54260 | | | | ½ | 3.83 | 2.81 | .83 | .14 | .57 | ¾ | 1¼ | 45 | BLACK |
| 54266 | | 150 Navy, 2/0 Weld | | ¾ | 2.88 | 1.75 | .94 | .14 | .63 | ½ | 1 | 50 | ORANGE |
| 54211 | 3/0 AWG | 325/24 = 131 kcmil | | ¾ | 2.94 | 1.81 | .94 | .14 | .63 | ¾ | 1 | 50 | ORANGE |
| 54265 | | 133/.0316, 259/.0227, 427/.0177 | | ½ | 3.94 | 2.81 | .94 | .14 | .63 | ½ | 1¼ | 50 | ORANGE |

† Contact Technical Services for specific stranding listings

Tooling: pp. B76-B92

Die Selector Chart: pp. B93-B95

* Blind End

United States
Tel: 901.252.8000
800.816.7809
Fax: 901.252.1354

Canada
Tel: 450.347.5318
Fax: 450.347.1976

Technical Services
Tel: 888.862.3289

Thomas & Betts

www.tnb.com