

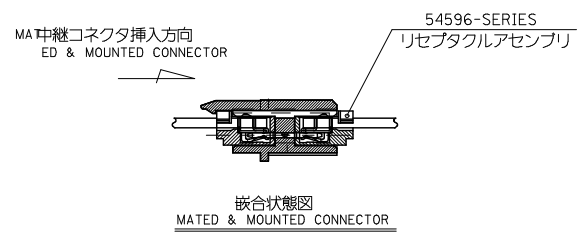
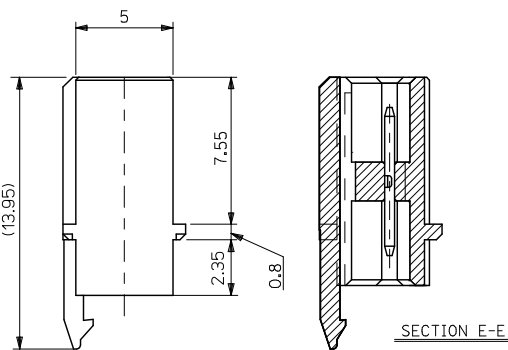
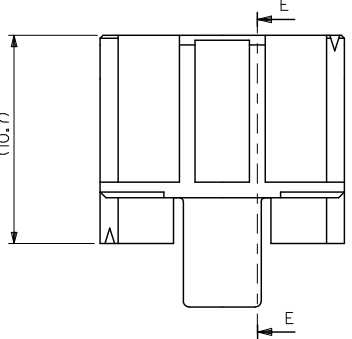


10 9 8 7 6 5 4 3 2 1

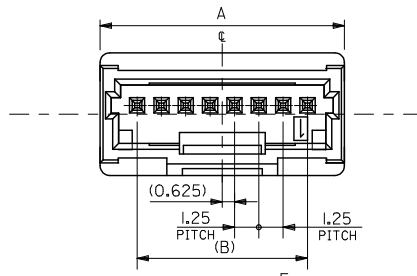

23.75	27.55	55482-2039	20
22.5	26.3	55482-1939	19
21.25	25.05	55482-1839	18
20	23.8	55482-1739	17
18.75	22.55	55482-1639	16
17.5	21.3	55482-1539	15
16.25	20.05	55482-1439	14
15	18.8	55482-1339	13
13.75	17.55	55482-1239	12
12.5	16.3	55482-1139	11
11.25	15.05	55482-1039	10
10	13.8	55482-0939	9
8.75	12.55	55482-0839	8
7.5	11.3	55482-0739	7
6.25	10.05	55482-0639	6
5	8.8	55482-0539	5
3.75	7.55	55482-0439	4
2.5	6.3	55482-0339	3
1.25	5.05	55482-0239	2
B	A	TRAY	CIRCUITS

- 注記 1.材質 MATERIAL  
 ウエハ: ホリアミド, UL94-V0, ナチュラル色  
 WAFER: PA, UL94-V0, COLOR NATURAL  
 ピン: 黄銅, 銅下地 鍍メッキ  
 PIN: BRASS, PRE-TINNED
- 2.嵌合相手 MATE WITH  
 リセブタクルアセンブリ: 54596 シリーズ  
 REC.ASS'Y: 54596 SERIES  
 ピン: リン青銅, 鍍メッキ  
 PIN: PHOSPHOR BRONZE, PRE-TINNED
- 3.本製品は 55482-\*\*\*30 の鉛フリー品である。  
 THIS PRODUCT IS LEAD FREE OF 55482-\*\*\*30.
- 4.ELV AND RoHS COMPLIANT.



REVISED EC NO: J2010-0170 DRAWN BY: CHYDKASAKANA APPROVED BY: APRRNIKITA	2009/07/27	2009/07/28	2009/07/29	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER	30 UNDER			±0.2	±0.25	±0.3	DRAWN BY T. UENO	DATE 2004/06/07	TITLE MINI M12 1-ROW RELAY WAFER ASSY -LEAD FREE-		
	10 OVER	30 OVER			±0.25	±0.3	±0.3	CHECKED BY M. SASAO	DATE 2004/06/07	MOLEX INCORPORATED		
	30 OVER				±0.3	±0.3	±0.3	APPROVED BY M. SASAO	DATE 2004/06/07	DOCUMENT NO. SD-55482-005		
A				REV	ANGULAR ±3°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	SIZE A3	SHEET NO. 1 OF 1			