


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

Specifications

1. Material: Body - Zinc, Nickel Plated
Contact: Brass, Gold Plated
Insulator: TPX
2. Flammability: UL94-HB
3. Contact Resistance: Center-2.1 milliohms
4. Working Voltage: 500V
5. Dielectric Strength: 1500V
6. Impedance: 50 Ohms
7. Temperature Range: -55°C to 85°C


REVISIONS							DOC. NO. SPC-FD05 * Effective: 12/21/98 * DCP No: 480	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
366	B	Redrawn	JWM	1/8/02	JC	2/6/02	JC	2/6/02

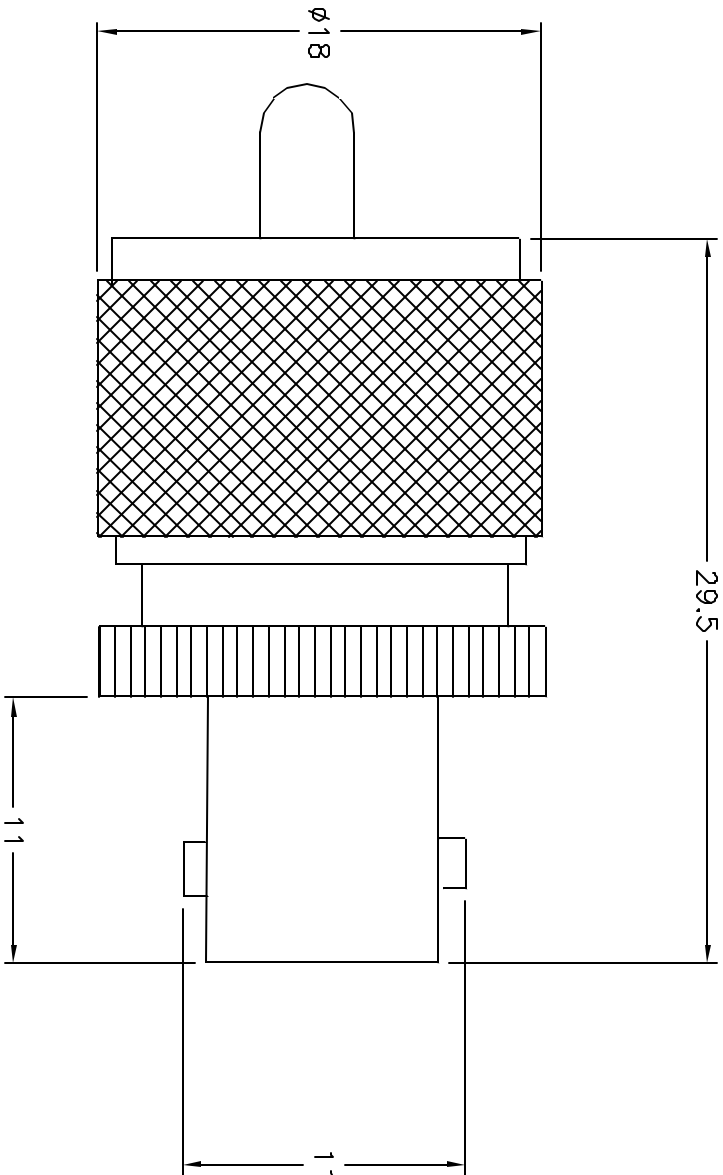

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

SPC-FD05.DWG

**SPC TECHNOLOGY**

DRAWING TITLE: Adapter, BNC Jack to UHF Plug

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	BNC Jack/UHF Plug	81N5463.dwg	B

SCALE:	NTS	U.O.M.: Millimeters	SHEET: 1 OF 1
--------	-----	---------------------	---------------