


# CWT-9001 Product Details

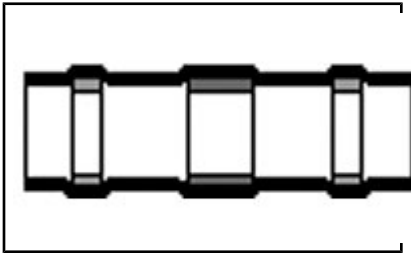

**CWT-9001**

TE Part Number: 054955-000

 [Active](#)

 [Add to Part List](#)

## Solder Sleeve Wire Splices

[Not EU RoHS or ELV Compliant](#)

### Product Highlights:

- Sealing = Splash proof
- CMA (Min.-Max) = 450 - 1,500 CMA
- Wire Temperature Rating Range (Max.) = 85°C to 125°C

[View all Features](#) | [Find Similar Products](#)

## Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)
- [Request Samples](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [Solder Sleeve One-Step Wire Terminator, Low Temperature](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [Wire and Cable, Harnessing and Protection Products](#) (PDF, English)

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files:

- None Available

### Related Products:

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- Connection Type = Solder

**Housing Related Features:**

- Sealing = Splash proof
- CMA (Min.-Max) (CMA [mm<sup>2</sup>]) = 450 – 1,500 [0.20 – 0.75]

**Industry Standards:**

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process

**Conditions for Usage:**

- Wire Temperature Rating Range (Max.) = 85°C to 125°C
- Operating Temperature (Max.) (°C) = 125

**Operation/Application:**

- Application = Wire to Wire Splicing

**Other:**

- Brand = Raychem