



Compact Flash Card Connector Type II

SPECIFICATIONS

Materials

Insulator: Glass reinforced LCP UL 94V-0 white color
 Contacts: Brass
 Cover: Stainless steel
 Push button: Glass reinforced PBT UI94V-0
 Mount Ear: Brass, tin plated overall


Contact Plating

Contact Area: 1Ø selective gold
 Solder Tail Area: 10Ø tin plating over 4Ø nickel

Electrical

Insulation Resistance: 1000 M Ω Min.
 Contact Resistance: 40 m Ω Max.
 Current Rating: 1Amp Max.

(click on the drawing for a more detailed view)

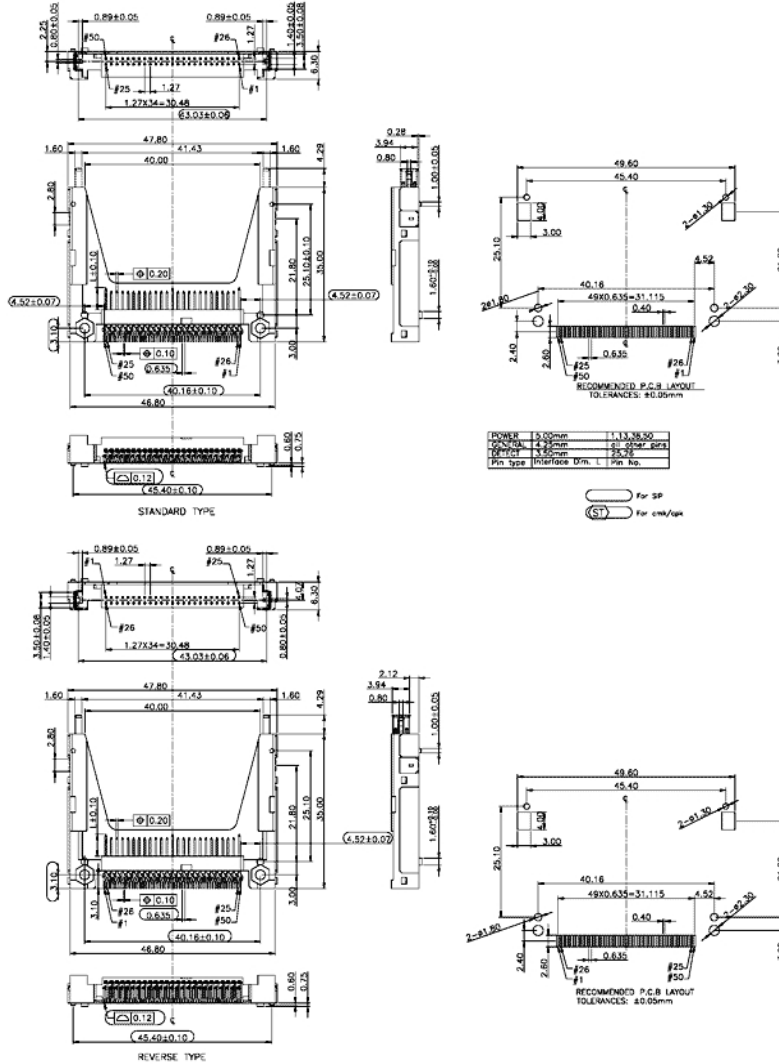

Order Information

33CFA2 S1 - 1 1 A
 1 2 3 4 5

1. Series No.
 33CFA2

3. Stand Off
 1: 0mm
 2: 2.2mm (standard type)

5. Board Mount
 A: Standard type
 B: Reverse type

2. Terminal Version
 S1: SMT

4. Lock Option
 0: Without
 1: Nuts