

[Skip to content](#)

Search By: Part Number Text [Tips](#)




Thursday, May 04, 2006

[Sign In](#)

[Home](#) > [Products](#) > [By Type](#) > [PolySwitch Resettable Devices](#) > [Product Feature Selector](#) > Product Details

## Product Details for MICROSMD035F-2

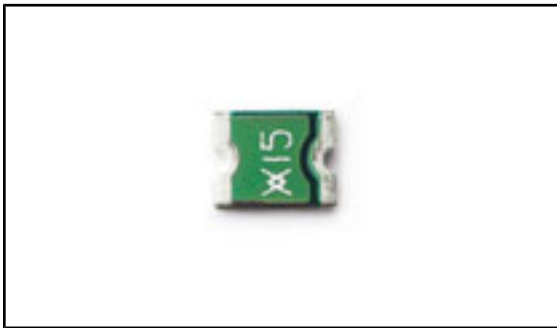

### MICROSMD035F-2

Tyco Part Number: A72665-000

[Active](#)

### PolySwitch Resettable Devices

[RoHS Compliant](#)

#### Product Highlights:

- Surface Mount Application
- Family Name = microSMD
- Surface Mount Construction
- IH (Room Temperature) = .35 Amps.
- IT (Room Temperature) = .75 Amps.

[View all Features](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [microSMD035F](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)****Product Type Features:**

- UL Listed = 290300-E74889

**Electrical Characteristics:**

- [IH \(Room Temperature\) \(Amps.\)](#) = 0.35
- [IT \(Room Temperature\) \(Amps.\)](#) = 0.75
- [Vmax Operating \(V\)](#) = 6
- [Rmin \( \)](#) = 0.32
- [R1 Max \[Post Trip\] \( \)](#) = 1.30
- [UL Rated Current \(Amps.\)](#) = 40
- Tripped Power Dissipation (Typical) (W) = 0.80

**Termination Related Features:**

- Construction = Surface Mount

**Body Related Features:**

- CSA File No. = 1031175 (CA 78165-1)

**Contact Related Features:**

- [Family Name](#) = microSMD

**Configuration Related Features:**

- [Form Factor \(inches\)](#) = 1210
- [Form Factor \(mm\)](#) = 3225

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- TUV Certificate No. = R72041438

**Conditions for Usage:**

- [Operating Temperature \(Max.\) \(°C\)](#) = 85

**Operation/Application:**

- Application = Surface Mount

**Packaging Related Features:**

- Packaging Method = Tape & Reel

**Other:**

- Brand = Raychem

**Languages:** English | [Deutsch](#) | [Español](#) | [Português \(do Brasil\)](#) | [Italiano](#) | [正體中文 \(繁體\) \(Chinese\)](#) | [中文 \(•体\) \(Simplified Chinese\)](#) | [日本語 \(Japanese\)](#)

**Country Sites:** [China](#) | [Japan](#)

© 2006 Tyco Electronics All Rights Reserved

[Home](#) | [Customer Support](#) | [Supplier](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)