MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSQ300



CIRCUIT DIAGRAM

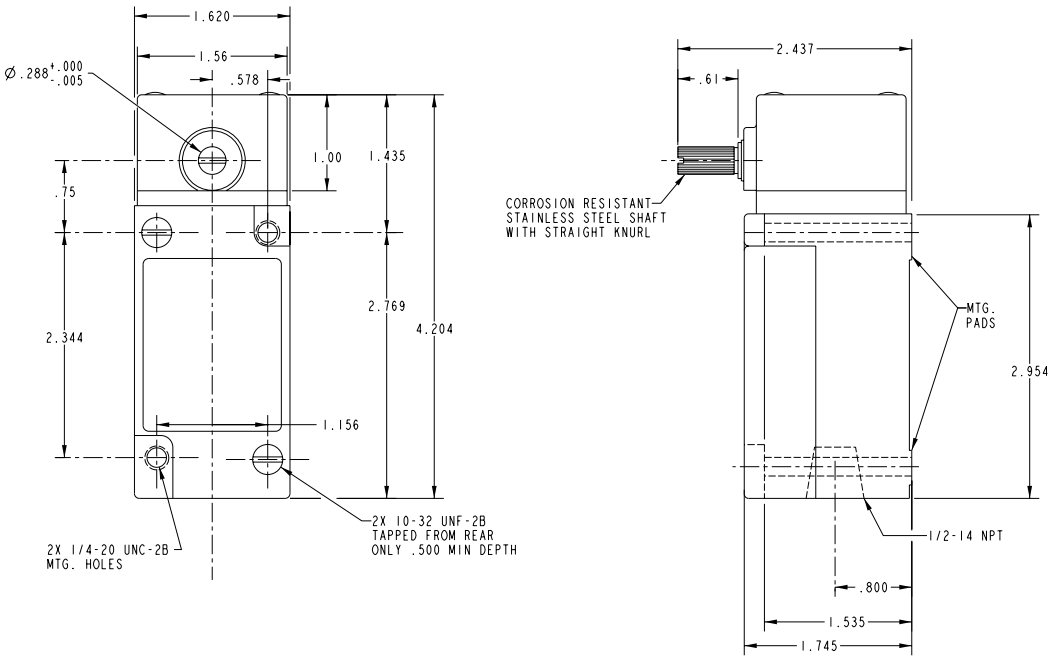

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING TORQUE	4 IN LBS MAX
PRETRAVEL	55°
CONTACT TRANSFER	60°
SEGMENT POSITION	90°
TOTAL SHAFT ROTATION	360° CW OR CCW

ELECTRICAL DATA
CONTACT ARRANGEMENT
SPDT

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

NOTES

1 - SWITCH USES FLUOROSILICONE SEALS IN OPERATING HEADS ONLY

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING LSQ300 | PAGE 1 OF 1 | RELEASE NO. PR-22474 | REPLACES
ISSUE 1
REVISIONS
DRAWN GLH 30 OCT 96
PTC/CAD
CHECK
CHECK
CHECK
CHECK

Downloaded from Elcodis.com electronic components distributor