


PRODUCT BRIEF:  
Logic :: Freescale

## ZOOM™ i.MX LITEKIT Development Kit

By providing a product-ready software and hardware platform, Logic's embedded product solutions fast forward product development and helps your company stay focused on its high-value core technologies. The Zoom™ Freescale i.MX LITEKIT is a low-cost, high-performance application development kit for evaluating the functionality of the Freescale i.MX processor and System on Module (SOM).

Application development is performed right on the product-ready i.MX SOM-LV and software Board Support Packages (BSPs) included in the kit, which enables you to seamlessly transfer your application code and hardware into production.

The i.MX SOM-LV is ideal for applications in the medical, point-of-sale, industrial, and security markets. From patient monitoring and medical imaging, to card payment terminals and bar code readers, to CCTV cameras and intruder alarms, the i.MX SOM-LV allows for powerful versatility and long-life products.

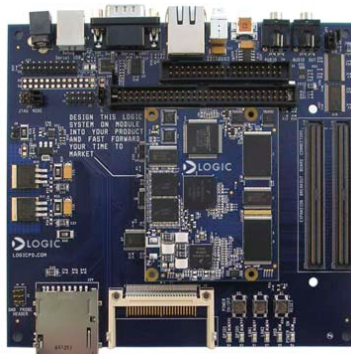

ZOOM™ i.MX LITEKIT WITH i.MX SOM-LV INCLUDED

The Zoom i.MX LITEKIT includes the i.MX SOM-LV, application baseboard, and accessories required to immediately begin development work.

### ZOOM™ i.MX LITEKIT :: HIGHLIGHTS:

- + Low-cost development kit
- + Includes product-ready SOM-LV
- + Compact size
- + Ready to run Board Support Packages (BSPs)

### i.MX SOM-LV :: BENEFITS:

- + Long product life-cycle
- + Scalability
- + Compact SOM-LV form factor
- + See i.MX27/31 SOM-LV product brief for more information



## ZOOM™ i.MX LITEKIT Ordering Information

Freescal P/N	SOM-LV Configuration	Recommended Resale
MCIMX27LITEKIT	MIMX27CSOM	\$675
MCIMX31LITEKIT	MIMX31CSOM	\$675

## i.MX27 SOM-LV Ordering Information

Freescal P/N	Speed (MHz)	DDR Mem (MB)	NOR Flash (MB)	NAND Flash (MB)	Touch	Audio	Ethernet
MIMX27BSOM	up to 400	64	2	64	Y	Y	Y
MIMX27CSOM	up to 400	128	2	64	Y	Y	Y

## i.MX31 SOM-LV Ordering Information

Freescal P/N	Speed (MHz)	DDR Mem (MB)	NOR Flash (MB)	NAND Flash (MB)	Touch	Audio	Ethernet
MIMX31ASOM	up to 532	64	2	64	Y	Y	--
MIMX31BSOM	up to 532	64	2	64	Y	Y	Y
MIMX31CSOM	up to 532	128	2	64	Y	Y	Y

## ZOOM™ Display Kit Ordering Information

Logic Model	Sharp LCD P/N	Display Size	Display Format	LCD Interface	Key Features
LCD-3.5-QVGA-20	LQ035Q7DB02	3.5"	QVGA 240x320	TFT	Color, transreflective
LCD-3.6-QVGA-10R	LQ036Q1DA01	3.6"	QVGA 320x240	TFT	Color, transmissive
LCD-5.7-QVGA-10	LQ057Q3DC02	5.7"	QVGA 320x240	TFT	Color, transmissive
LCD-6.4-VGA-10R	LQ64D343	6.4"	VGA 640x480	TFT	Color, transmissive
LCD-10.4-VGA-10	LQ10D368	10.4"	VGA 640x480	TFT	Color, transmissive
LCD-12.1-SVGA-10	LQ121S1DG41	12.1"	SVGA 800x600	TFT	Color, transmissive

### LOGIC WEBSITE :: DESIGN RESOURCES:

- +Logic Technical Support : <http://www.logicpd.com/support/>
- +Technical Discussion Group : <http://www.logicpd.com/support/tdg/>
- +Frequently Asked Questions (FAQ) : <http://www.logicpd.com/support/faq/>
- +For more information contact Logic Sales : [product.sales@logicpd.com](mailto:product.sales@logicpd.com)



embedded product solutions

411 N. Washington Ave. Suite 400 Minneapolis, MN 55401  
T : 612.672.9495 F : 612.672.9489 I : [www.logicpd.com](http://www.logicpd.com)

## Product Features

### Freescal i.MX SOM-LV Included

#### LCD Display Connector

- +Integrated LCD, touch, and backlight connector for Zoom Display Kits

#### Audio

- +Stereo input and output jacks

#### Network Support

- +One RJ45 Ethernet jack connector with magnetics (application/debug)

#### PC Card Expansion

- +CompactFlash® Type I card
- +MMC/SD card

#### ATA Support

#### USB

- +One USB 2.0 high-speed host
- +One USB high-speed On-the-Go device

#### Serial Ports

- +115.2kbps RS-232 debug serial port

#### Software

- +LogicLoader™ (bootloader/monitor)
- +Windows® CE 5.0 BSP
- +GNU cross development toolchain (compiler, linker, assembler, debugger)

#### Cables

- +Serial cable (null-modem)
- +Ethernet crossover cable
- +USB A to mini-B cable
- +5 volt power supply (with Europe, Japan, UK, & US adapters)

#### Mechanical

- +146.1 mm wide x 158.8 mm long x 17.1 mm high

#### RoHS Compliant

