

10BASE-T LAN MAGNETICS

Quad Transformer Module

LM00502


- Transformer turns ratio RX 1 : 1 and TX 1CT : 2CT
- Filterless quad, four-port designs with common footprint and pinouts
- Optimized for use with stackable RJ-45 connectors
- Utilizes standard 40 pin SMD packaging
- Low profile, surface mount packaging rated to 225° C peak IR reflow temperature
- Quad design offers best space, performance and cost efficiency
- Operating temperature 0° to 70° C
- Minimum interwinding breakdown voltage of 1500 Vrms

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Insertion Loss dB max	Return Loss dB min	Common to Common Mode Rejection dB min			Crosstalk dB min
	1MHz to 10MHz	5MHz to 10MHz	5MHz to 10MHz	10MHz to 30MHz	30MHz to 100MHz	100KHz to 30MHz
S553-5999-28	-1.0	-16	-40	-35	-30	-40

SCHEMATIC


S553-5999-28

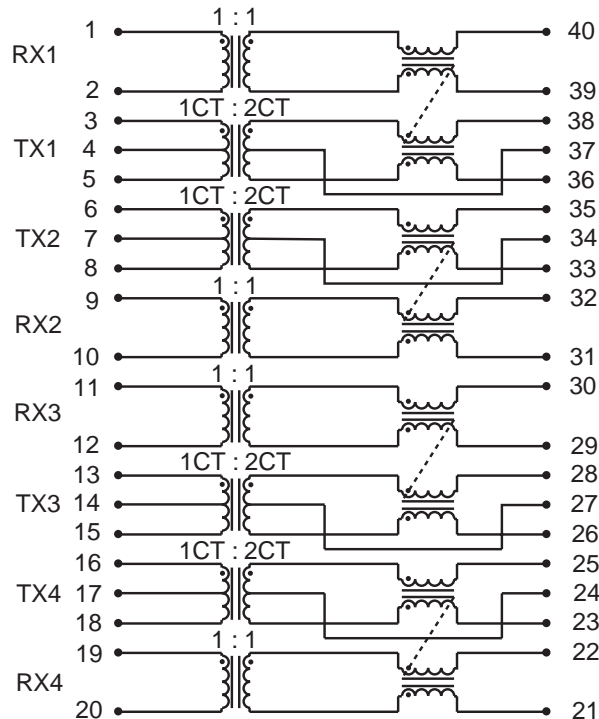

©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01

MECHANICAL

S553-5999-28

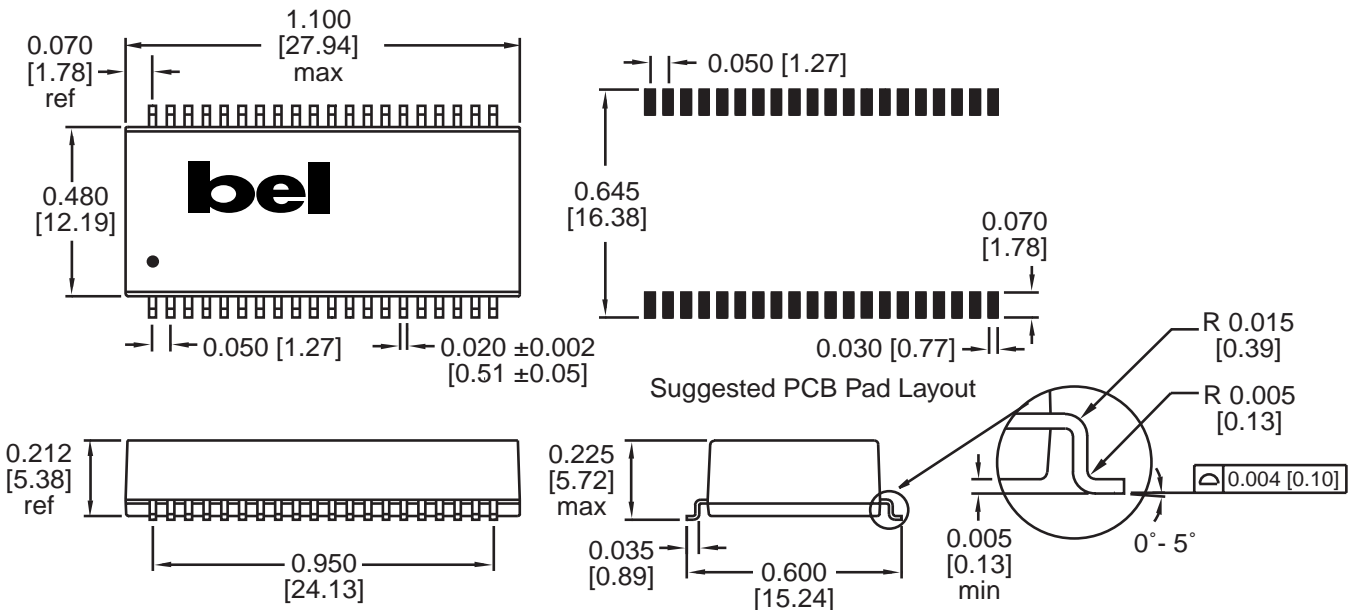

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

L5-10

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com