MICRO SWITCH
FREEPORT ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING
BE-2RQ1-A2

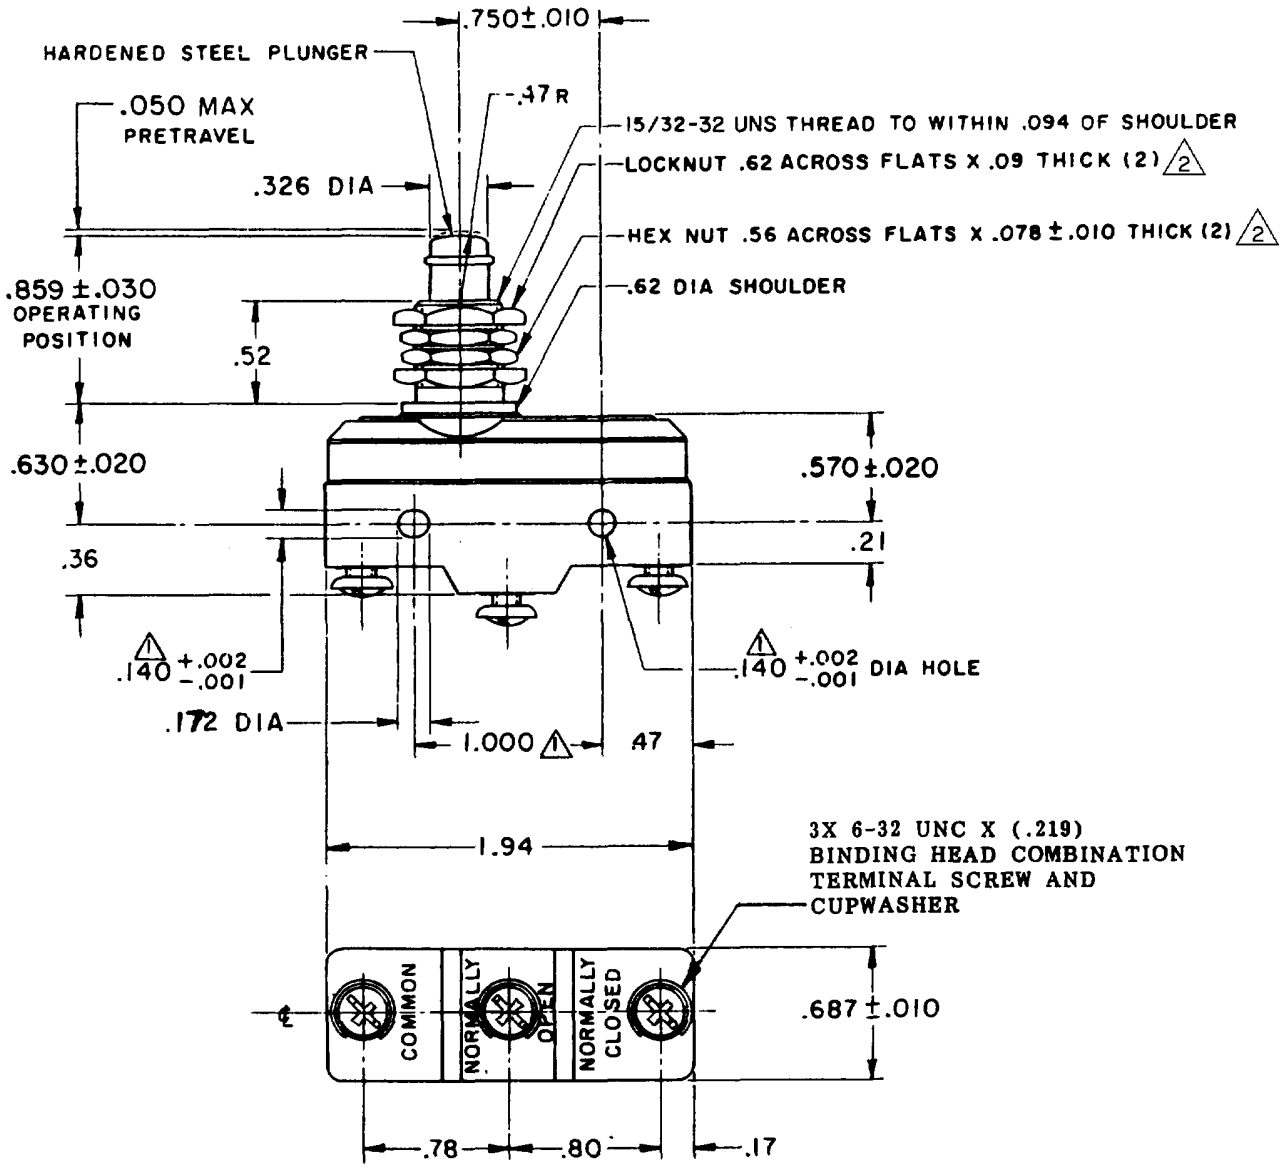

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE ——— 14-22 OZ

RELEASE FORCE ——— 10 OZ MIN

DIFFERENTIAL TRAVEL —.0020—.0075

OVERTRAVEL ——— .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A—125 or 250VAC
1HP—125VAC; 2HP—250VAC
PILOT DUTY 750VA—125, 250, 277VAC
60/75°C (Cu)

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.018	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.005	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS — SI METRIC ☐ — US CUSTOMARY ■

WEIGHT .084 LB

REPLACES X69099-BE
RELEASE NO. PR-7948
DRAWING NUMBER M BE-2RQ1-A2
ISSUE X 8 5 4 8
CHECK
REVISIONS
A CO 58782 WJM 25 JAN 86
B CO-73287-J JAL 22 NOV 93
C CO 77590 SAD 9 JUN 94
D CO-82133 CSL 26 JUL 96
CHECK
CHECK 19 JUNE 79
CHECK CEB 19 JUNE 79
DRAWN J A P 13 JUN 79
FORMTEK FO-52848-A

Downloaded from Elcodis.com electronic components distributor