


Resetting case		
V-10		
10 A		
	1.96 N {200 gf}	0.98 N {100 gf}
Standard	Standard	Standard
Standard	Standard	Standard
Semi-standard	Semi-standard	Semi-standard
Standard	Standard	Standard
Standard	Standard	Standard
Semi-standard	Semi-standard	Semi-standard
---	---	---
---	---	---
---	---	---
---	---	---
Standard	Standard	Standard
Semi-standard	Semi-standard	Semi-standard
---	---	---


Non-Sealed Microswitches



Left-hand barrier
V-21-1CL6
V-21-2CL6
V-21-3CL6
V-211-1CL6
V-212-1CL6
V-213-1CL6
V-214-1CL6
V-215-1CL6
V-216-1CL6

10 A
OF: 0.98 N {100 gf}
V-10-1A4-T
V-101-1A4-T
V-102-1A4-T
V-103-1A4-T
V-104-1A4-T
V-105-1A4-T
V-106-1A4-T


Non-Sealed Microswitches





load	
Motor load	
NC	NO
A	
A	
A	
.1 A	
.05 A	
A	
A	
A	
.1 A	
.05 A	
A	
A	
A	
.1 A	
.05 A	
A	
A	
A	
.1 A	
.05 A	

which vary with the normal


Non-Sealed Microswitches



V-10

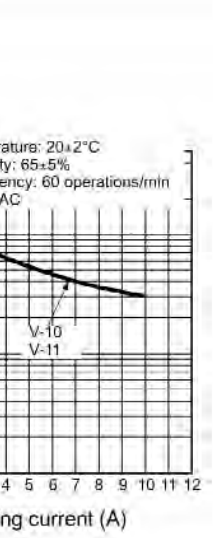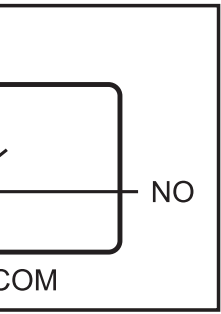

Non-Sealed Microswitches




with a switching current of
 only. Terminals A, C2,
 85 for these terminals.

V-16-1□5	
1.96 N {200 gf}	
0.49 N {50 gf}	

V-11-1□4	
0.98 N {100 gf}	
0.20 N {20 gf}	
1.2 mm	
1.0 mm	
0.4 mm	
14.7±0.4 mm	

Non-Sealed Microswitches




V-161-1□5	
1.96 N {200 gf}	
0.49 N {50 gf}	

V-111-1□4	
0.98 N {100 gf}	
0.15 N {15 gf}	
1.6 mm	
0.8 mm	
0.6 mm	
15.2±0.5 mm	

V-105-1□5	V-105-1□4
	1.18 N {120 gf}
	0.15 N {15 gf}
8 mm	

V-106-1□5	V-106-1□4
	0.59 N {60 gf}
	0.06 N {6 gf}
2 mm	

Non-Sealed Microswitches



the screw terminals.

25-3

Insulation thickness for this clearance distance should be 1.9 mm. If the product incorporating an insulating barrier or use a Separation barrier.

0.03527.