



All information is subject to change without notice. Please read bottom notes.


RoHS compatible

- FEATURES :** (1)5.7" VGA color display
 (2)Wide Viewing Angle & Wide Operating temperature
 (3) Built in Long Life LEDs (MTBF:100,000 h)
 (Condition; $T_a=25^{\circ}\text{C}$, PWM=100%(continuous lighting))
 (4)Replaceable structure of LED unit / Include LED driving circuit
 (5)Main Viewing Angle Direction : 12 o'clock

TENTATIVE

Specification

Display size	5.7type(14cm)
Number of Pixels	640(W) X 480(H) (VGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.18(W) X 0.18(H)
Luminance (typ.)	350 cd/m ²
Response Time (typ.)	$T_{ON}=15\text{ms}$, $T_{OFF}=25\text{ms}$
Contrast	500
Viewing Angle (CR \geq 10)	Vertical : 100 degrees, Horizontal : 120 degrees
I/F Format & Supply voltage	LVDS RGB 6/8bit, H/V sync+DE or DE-only, $V_{DD}=3.3\text{V}$
Operating Temperature	-20 to 70 degree C.
Outline dimension (mm)	144.0(W) X 104.6(H) X (12.3)(D)mm
Weight (approximately)	TBD
Backlight	Sidelight (LEDs)
Power Consumption	TBD

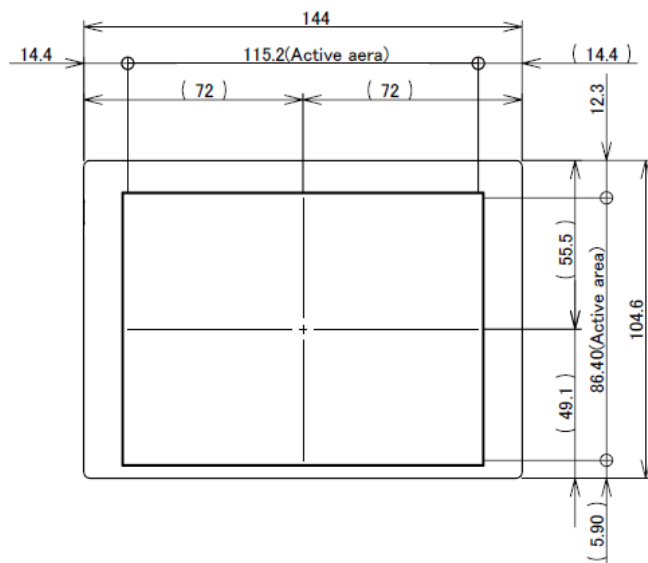

Rev.0.1R (2009/08/21)

*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.