

- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

[My Account](#)

- [Sign In](#)
- [Register](#)


[Customer Support](#)

- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [PCB Connectors](#) > [Product Feature Selector](#) > Product Details

6-535541-0 Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

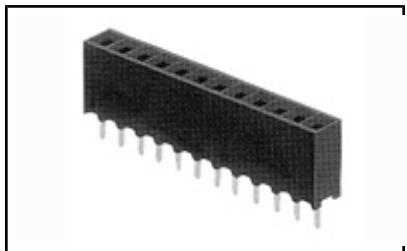

6-535541-0



.100 inch AMPMODU Receptacles



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Receptacle
- Mod IV
- Number of Positions = 12
- Number of Rows = Single
- Low Profile

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [RECPT.ASSY, MOD IV, SINGLE ROW, .100CL, VERTICAL BOA...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- [AMPMODU Mod II and Mod IV Printed Circuit Board Conn...](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version N)
- [3D Model](#) (IGES, Version N)
- [3D Model](#) (STEP, Version N)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Receptacle
- [Connector Series](#) = Mod IV
- [Number of Positions](#) = 12
- [Profile](#) = Low
- [Mount Angle](#) = Vertical
- [Mounting Pattern \(mm \[in\]\)](#) = 2.54 [.100]
- [Sealed](#) = No
- [Holddown Feature](#) = Without
- PCB Retention Feature = Yes
- Closed Entry = With
- Board Standoff = With
- Comment = To obtain the minimum mating post length, add 0.51 [.020] (not including the post lead in chamfer) to the maximum point-of-contact dimension.; Tyco Electronics recommends mating gold or duplex plated headers with duplex plated receptacle assemblies.

Mechanical Attachment:

- [Stackable](#) = Yes

Electrical Characteristics:

- Contact Current Rating (Amps.) = 2
- Contact Resistance (m \bullet) = 12
- Insulation Resistance (M \bullet) = 5,000
- Dielectric Withstanding Voltage (V) = 750

Termination Related Features:

- Termination Method = Through Hole
- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.18 [0.125]
- Solder Tail Contact Plating = Tin over Nickel

Body Related Features:

- [Number of Rows](#) = Single
- [Connector Height \(mm \[in\]\)](#) = 6.22 [0.245]
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 [.100]
- [PCB Retention Method](#) = Retention Solder Tails

Contact Related Features:

- [Contact Mating Area Plating Material](#) = Gold (30)
- Contact Material = Phosphor Bronze
- Approved Standards = UL E28476, CSA LR7189
- Contact Type = Short Point

Housing Related Features:

- Housing Entry Style = Top
- Housing Material = Polyester PCT
- Housing Flammability Rating = UL 94V-0
- Housing Color = Black

Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -65 – +105
- High Temperature Compatible = No

Packaging Related Features:

- Packaging Method = Gang of Tubes

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2008 Tyco Electronics Corporation All Rights Reserved