

All information is subject to change without notice. Please read bottom notes.


- FEATURES :** (1) 15.4WIDE-XGA(1280x800 pixels) display size
(2) LVDS interface system (H-Sync, V-Sync)
(3) High Brightness with low power consumption

RoHS compatible

Specification

TENTATIVE

Display size	15.4type(39cm)
Number of Pixels	1280(W) X 800(H) (WXGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.2595(W) X 0.2595(H)
Luminance (typ.)	225 cd/m ² at I _{FL} =6.5 mA(rms)
Response Time (max.)	T _{ON} = 50ms, T _{OFF} =50ms
Contrast (min.)	150
Viewing Angle (CR≥10)	Vertical : 90 degree, Horizontal : 100 degree
I/F Format & Supply voltage	LVDS 6bit, H/V sync+DE or DE-Only, V _{DD} =3.3V
Operating Temperature	0 to 50 degree C
Outline dimension (mm)	344.0(W) X 222.0(H) X 6.5max.(D)(max.)mm
Weight (approximately)	570g
Backlight	Single CCFL, Sidelight type
Power Consumption	5.12 W (Except the efficiency of FL inverter)

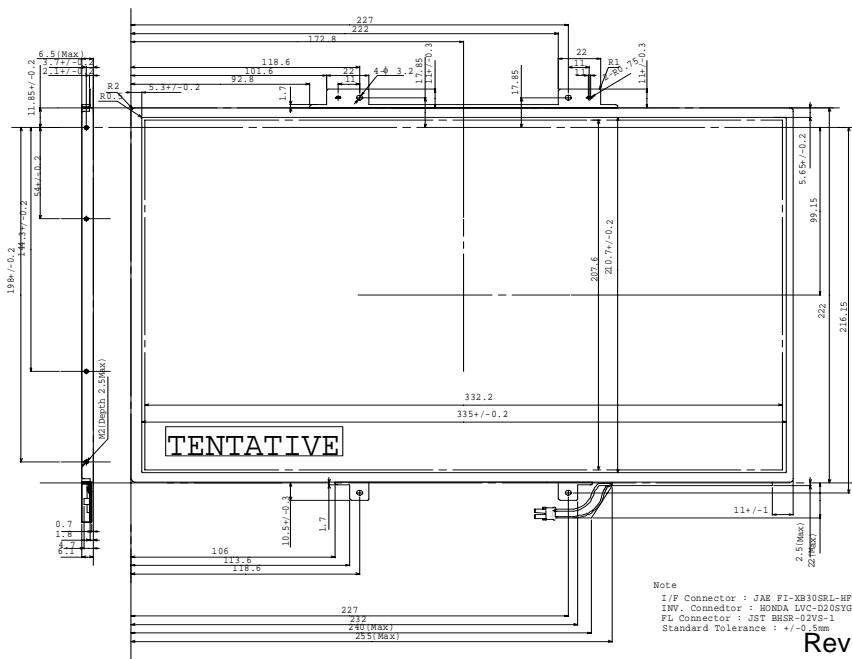

Note
I/F Connector : JAE FL-KB308RL-HP11
FW Connector : HONDA LVC-0205V
FL Connector : JST BHSR-02VS-1
Standard Tolerance : +/-0.5mm

Rev.0.1R (2007/07/12)

*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.