

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LTR	DESCRIPTION	DATE	BY
AD	00			
Z		ECO-06-11106	10AUG06	MB NE

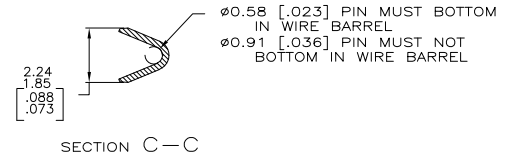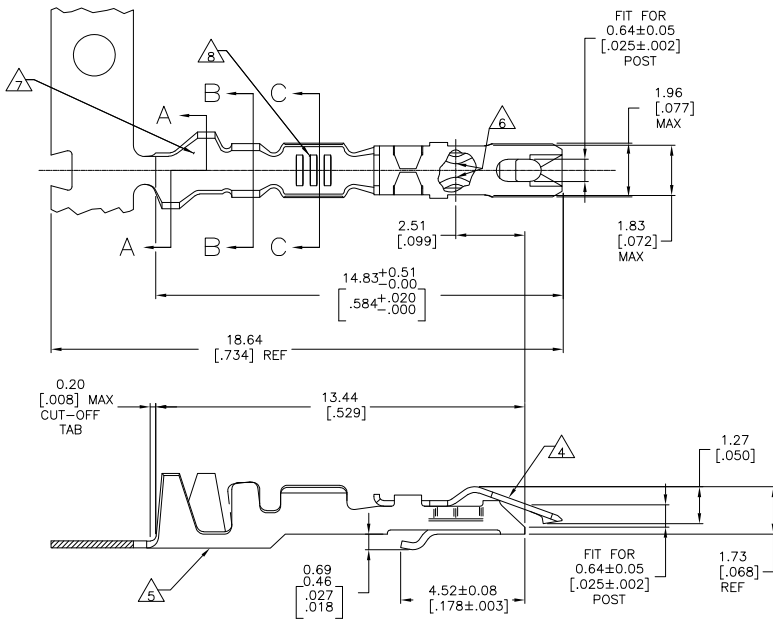

1. REELED FOR MINI APPLICATOR.
- ▲ PLATED WITH .00254 [0.00100] TIN LEAD OVER .00127 [0.00050] NICKEL ENTIRE CONTACT.
 - ▲ PLATED WITH .00076 [0.00030] GOLD IN CONTACT AREA, GOLD FLASH ON REMAINDER, OVER .00127 [0.00050] NICKEL.
 - ▲ SPRING MATERIAL: STAINLESS STEEL.
 - ▲ BODY MATERIAL: PHOSPHORUS BRONZE (SEE TABLE FOR FINISH.)
 - ▲ POINT OF PLATING MEASUREMENT.
 - ▲ INSULATION BARREL RANGE Ø0.71 [0.038]-Ø1.57 [0.062].
 - ▲ WIRE BARREL RANGE #20
 - ▲ PLATED WITH .00254 (.000100) TIN OVER .00127 (.000050) NICKEL, ENTIRE CONTACT.

SUPERSEDED BY 5-867052-1

FINISH	PART NUMBER
▲	5-867052-1
▲	867052-3
▲	867052-2
▲	867052-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW E. BRANDBERG 17-1-93	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS mm [INCHES]		CHK S. SHUEY 26-1-93	NAME S. SHUEY	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PRODUCT SPEC 108-36028	APPLICATION SPEC 114-25006	
MATERIAL AS SHOWN		WEIGHT -	SIZE A2	CAGE CODE 00779
FINISH AS SHOWN		DRAWING NO. C=867052		RESTRICTED TO -
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV Z

AMP 1471-9 REV 31MM2000

867052

A