

## ADSL Magnetics

For Texas Instruments TNETD4000R

TM00325

- Designed to meet IEC 950 safety requirements for supplementary insulation at 250V
- Minimum interwinding breakdown voltage of 1500 Vrms
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias


### ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Package	Turns Ratio ± 2%	Inductance <sup>1</sup> mH ±5%	Leakage Inductance µH max	DCR Ω Max		Longitudinal Balance db min	Insertion Loss <sup>2</sup> dB max	Frequency Response <sup>2</sup> dB	Harmonic Distortion <sup>2</sup> dB max
		Chip : Line	Line Side	Line Side	Chip Side	Line Side	30 kHz - 1.1 MHz	300 kHz	30 kHz - 1.1 MHz	100 kHz 15 Vp-p
0560-6600-64	THT	1 : 1.423	1.5	18	0.7	3.8	50	0.5	± 0.5	-80
S560-6600-P3	SMD	1 : 1.423	1.5	18	0.7	3.8	50	0.5	± 0.5	-80

1. measured at 10 kHz, 0.1 Vac  
2. Source resistance equals 100Ω

### SCHEMATIC




**0560-6600-64**  
**S560-6600-P3**

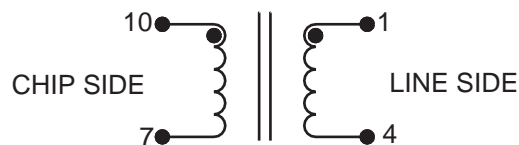



TM00325

### MECHANICAL


0560-6600-64

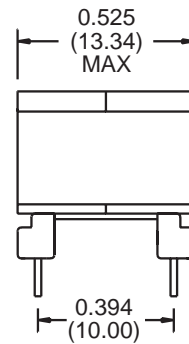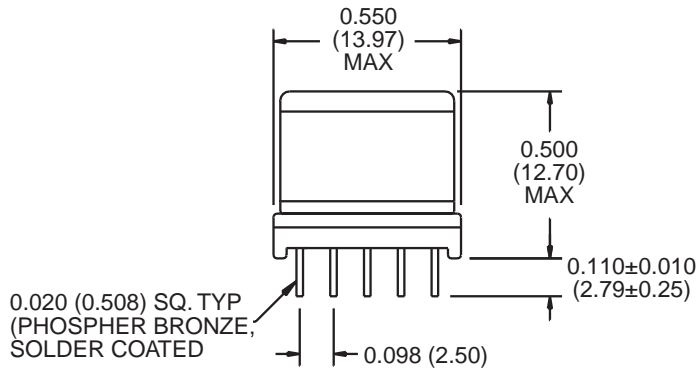

S560-6600-P3



### SUGGESTED PCB PAD LAYOUT

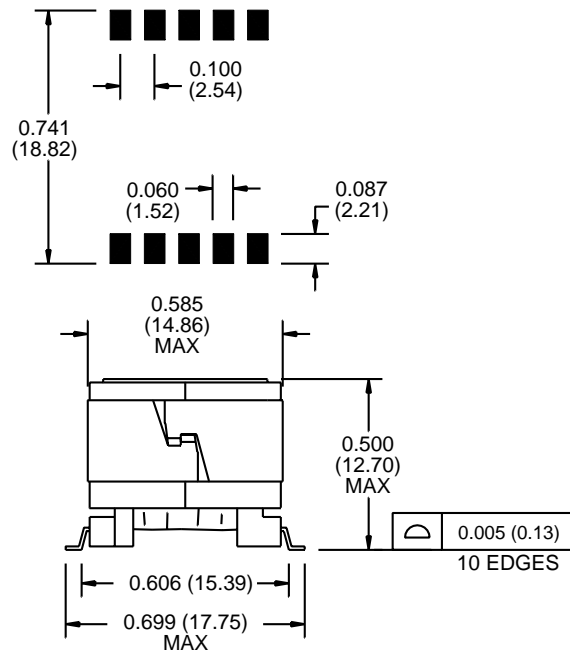

©2000 Bel Fuse Inc. Specifications subject to change without notice. 06.00

### CORPORATE

**Bel Fuse Inc.**  
198 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

T3-70

### FAR EAST

**Bel Fuse Ltd.**  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com