

## Datasheet

### Features

- Single 3.3V Power Supply
- Industrial Temperature Range (–40°C to 110°C) and Military Temperature Range (–55°C to 125°C)
- Symmetrical High-speed Read and Write with Fast Access Time (35 ns)
- Equal Address and Chip-enable Access Times
- Automatic Data Protection with Low-voltage Inhibit Circuitry to Prevent Writes on Power Loss
- All Inputs and Outputs are Transistor-transistor Logic (TTL) Compatible
- Fully Static Operation
- Full Nonvolatile Operation with 20 Years Minimum Data Retention

### Introduction

The EV2A08A is a 4,194,304-bit magnetoresistive random access memory (MRAM) device organized as 524,288 words of 8 bits. The EV2A08A is equipped with chip enable ( $\overline{E}$ ), write enable ( $\overline{W}$ ), and output enable ( $\overline{G}$ ) pins, allowing for significant system design flexibility without bus contention.

MRAM is a nonvolatile memory technology that protects data in the event of power loss and does not require periodic refreshing. The EV2A08A is the ideal memory solution for applications that must permanently store and retrieve critical data quickly.

The EV2A08A is available in a 400-mil, 44-lead plastic small-outline TSOP type-II package RoHS compliant (MSL3 according to Jedec standard) with an industry-standard center power and ground SRAM pinout.

The EV2A08A is available in Industrial (–40°C to 110°C) and Military (–55°C to +125°C) temperature ranges.

Visit our website: [www.e2v.com](http://www.e2v.com)  
for the latest version of the datasheet

## 1. Device Pin Assignment

Figure 1-1. Block Diagram


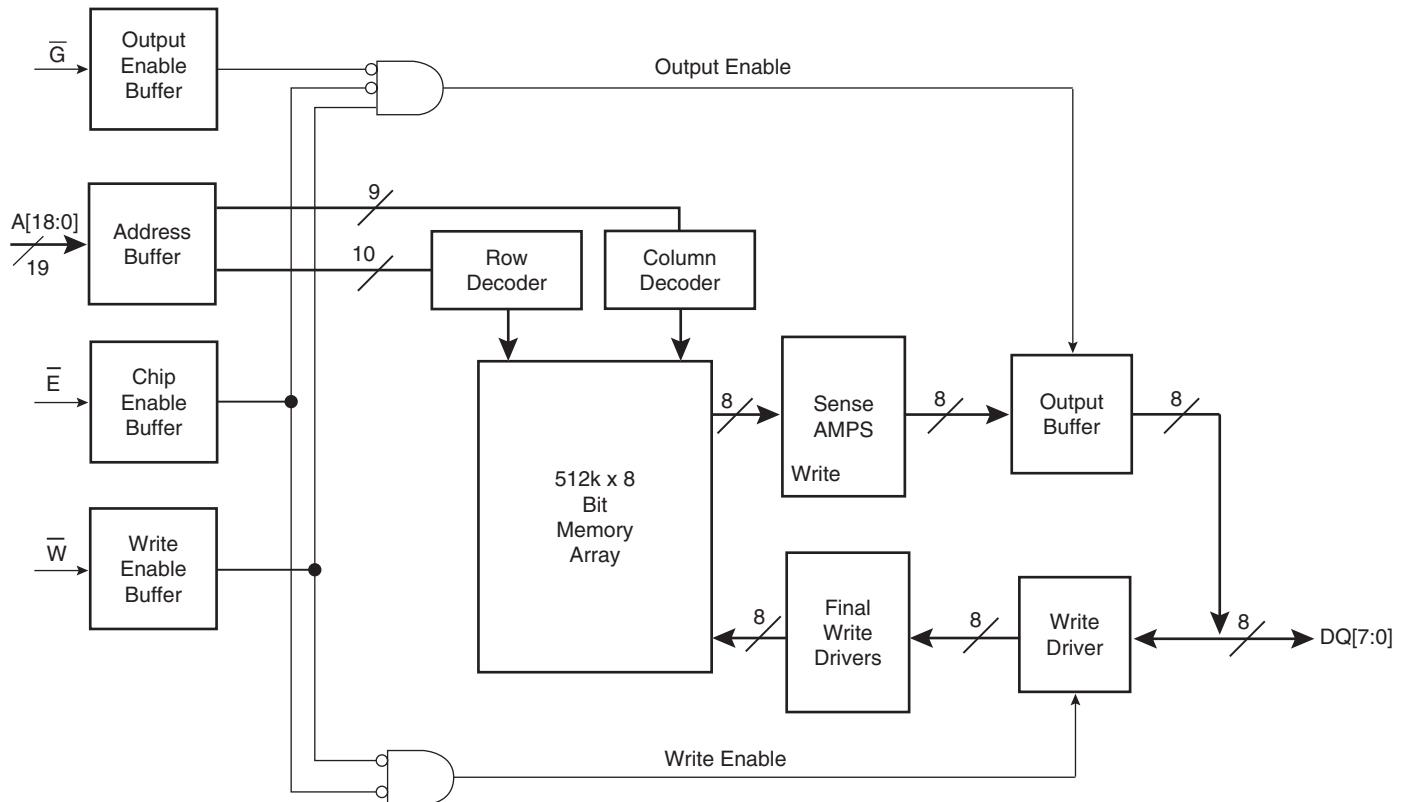


Table 1-1. Pin Functions

Signal Name	Function
A	Address Input
$\bar{E}$	Chip Enable
$\bar{W}$	Write Enable
$\bar{G}$	Output Enable
DQ	Data I/O
$V_{DD}$	Power Supply
$V_{SS}$	Ground
DC	Do Not Connect
NC	No Connection – Pin 2, 43 (TSOPII); Reserved For Future Expansion

Figure 1-2. Pin Diagrams for Available Packages (Top View)

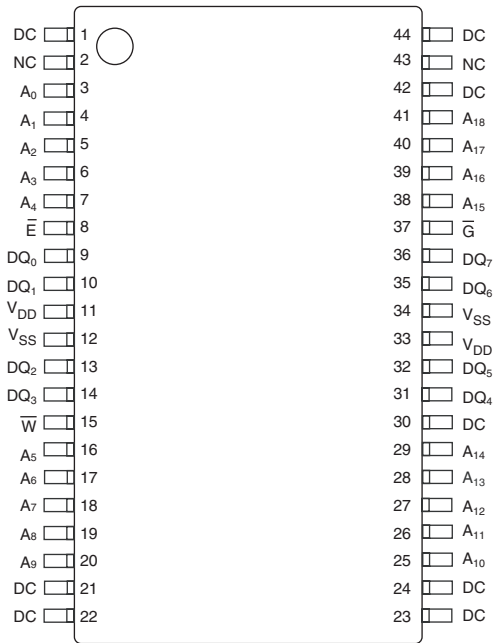

44 Pin TSOP II

Table 1-2. Operating Modes

$\bar{E}^{(1)}$	$\bar{G}^{(1)}$	$\bar{W}^{(1)}$	Mode	$V_{DD}$ Current	DQ[7:0] <sup>(2)</sup>
H	X	X	Not selected	$I_{SB1}, I_{SB2}$	Hi-Z
L	H	H	Output disabled	$I_{DDR}$	Hi-Z
L	L	H	Byte Read	$I_{DDR}$	$D_{Out}$
L	X	L	Byte Write	$I_{DDW}$	$D_{In}$

Notes: 1. H = high, L = low, X = don't care  
 2. Hi-Z = high impedance

## 2. Electrical Specifications

### 2.1 Absolute Maximum Ratings

This device contains circuitry to protect the inputs against damage caused by high static voltages or electric fields; however, it is advised that normal precautions be taken to avoid application of any voltage greater than maximum rated voltages to these high-impedance (Hi-Z) circuits.

The device also contains protection against external magnetic fields. Precautions should be taken to avoid application of any magnetic field more intense than the maximum field intensity specified in the maximum ratings.

**Table 2-1.** Absolute Maximum Ratings<sup>(1)</sup>

Parameter	Symbol	Value	Unit
Supply voltage <sup>(2)</sup>	$V_{DD}$	-0.5 to 4.0	V
Voltage on an pin <sup>(2)</sup>	$V_{IN}$	-0.5 to $V_{DD} + 0.5$	V
Output current per pin	$I_{OUT}$	±20	mA
Package power dissipation	$P_D$	0.600	W
Temperature under bias EV2A08AM	$T_{BIAS}$	-55 to 125	°C
Storage Temperature	$T_{stg}$	-55 to 125	°C
Lead temperature during solder (3 minute max)	$T_{Lead}$	260	°C
Maximum magnetic field during write EV2A08A (All Temperatures)	$H_{max\_write}$	2000	A/m
Maximum magnetic field during read or standby	$H_{max\_read}$	8000	A/m

- Notes:
1. Permanent device damage may occur if absolute maximum ratings are exceeded. Functional operation should be restricted to recommended operating conditions. Exposure to excessive voltages or magnetic fields could affect device reliability.
  2. All voltages are referenced to  $V_{SS}$ .
  3. Power dissipation capability depends on package characteristics and use environment.

**Table 2-2.** Operating Conditions

Parameter	Symbol	Value	Typical	Max	Unit
Power supply voltage	$V_{DD}$	3.0 <sup>(1)</sup>	3.3	3.6	V
Write inhibit voltage	$V_{WI}$	2.5	2.7	3.0 <sup>(1)</sup>	V
Input high voltage	$V_{IH}$	2.2	–	$V_{DD} + 0.3$ <sup>(2)</sup>	V
Input low voltage	$V_{IL}$	-0.5 <sup>(3)</sup>	–	0.8	V
Operating temperature EV2A08AV (Industrial) EV2A08AM (Military)	$T_{case}$	-40 -55		110 125	°C

- Notes:
1. There is a 2 ms startup time once  $V_{DD}$  exceeds  $V_{DD}(min)$ . See Power Up and Power Down Sequencing below.
  2.  $V_{IH}(max) = V_{DD} + 0.3 V_{DC}$ ;  $V_{IH}(max) = V_{DD} + 2.0 V_{AC}$  (pulse width = 10 ns) for  $I = 20.0$  mA.
  3.  $V_{IL}(min) = -0.5 V_{DC}$ ;  $V_{IL}(min) = -2.0 V_{AC}$  (pulse width = 10 ns) for  $I = 20.0$  mA.
  4. Automotive temperature profile assumes 10% duty cycle at maximum temperature (2-years out of 20-year life).


## 2.2 Power Up and Power Down Sequencing

MRAM is protected from write operations whenever  $V_{DD}$  is less than  $V_{WI}$ . As soon as  $V_{DD}$  exceeds  $V_{DD}(\min)$ , there is a startup time of 2 ms before read or write operations can start. This time allows memory power supplies to stabilize.

The  $\bar{E}$  and  $\bar{W}$  control signals should track  $V_{DD}$  on power up to  $V_{DD} - 0.2\text{ V}$  or  $V_{IH}$  (whichever is lower) and remain high for the startup time. In most systems, this means that these signals should be pulled up with a resistor so that signal remains high if the driving signal is Hi-Z during power up. Any logic that drives  $\bar{E}$  and  $\bar{W}$  should hold the signals high with a power-on reset signal for longer than the startup time.

During power loss or brownout where  $V_{DD}$  goes below  $V_{WI}$ , writes are protected and a startup time must be observed when power returns above  $V_{DD}(\min)$ .

**Figure 2-1.** Power Up and Power Down Diagram

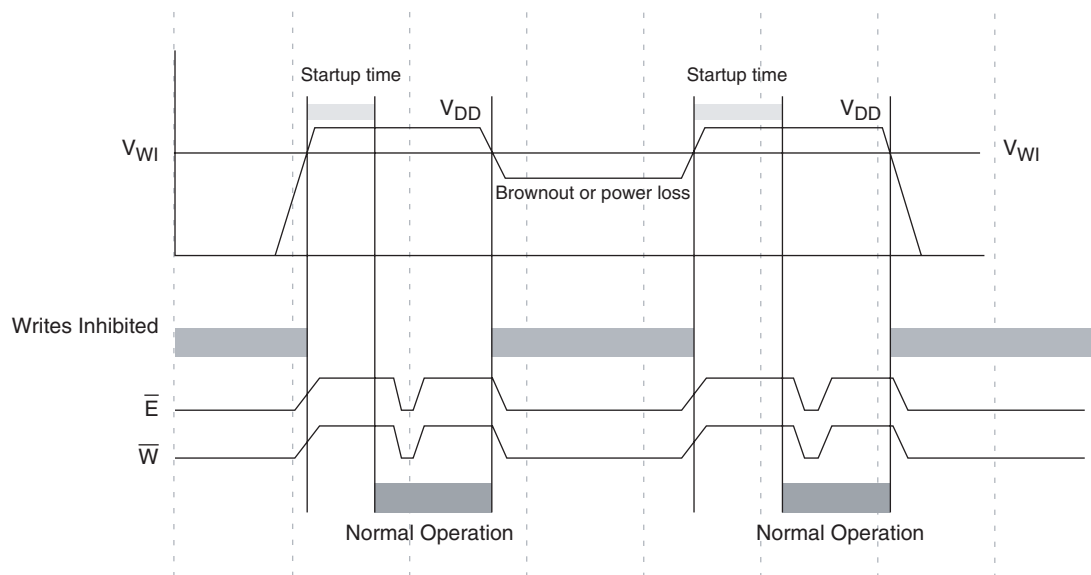

**Table 2-3.** DC Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Input leakage current	$I_{lkg(I)}$	–	–	$\pm 1$	$\mu\text{A}$
Output leakage current	$I_{lkg(O)}$	–	–	$\pm 1$	$\mu\text{A}$
Output low voltage ( $I_{OL} = +4\text{ mA}$ ) ( $I_{OL} = +100\ \mu\text{A}$ )	$V_{OL}$	–	–	0.4 $V_{SS} + 0.2$	V
Output high voltage ( $I_{OL} = -4\text{ mA}$ ) ( $I_{OL} = -100\ \mu\text{A}$ )	$V_{OH}$	2.4 $V_{DD} - 0.2$	–	–	V

**Table 2-4.** Power Supply Characteristics

Parameter	Symbol	Typical	Max	Unit
AC active supply current-read modes <sup>(1)</sup> ( $I_{OUT} = 0\text{mA}$ , $V_{DD} = \text{max}$ )	$I_{DDR}$	30	66	mA
AC active supply current-write modes <sup>(1)</sup> ( $V_{DD} = \text{max}$ ) EV2A08AV (Industrial) EV2A08AM (Military)	$I_{DDW}$	50 50	135 135	mA
AC standby current ( $V_{DD} = \text{max}$ , $\bar{E} = V_{IH}$ ) no other restrictions on other inputs	$I_{SB1}$	13	20	mA
CMOS standby current ( $\bar{E} \geq V_{DD} - 0.2\text{V}$ and $V_{In} \leq V_{SS} + 0.2\text{V}$ or $\geq V_{DD} - 0.2\text{V}$ ) ( $V_{DD} = \text{max}$ , $f = 0\text{MHz}$ )	$I_{SB2}$	8	10	mA

Note: 1. All active current measurements are measured with one address transition per cycle and at minimum cycle time.



**Table 2-5.** Capacitance<sup>(1)</sup>

Parameter	Symbol	Typical	Max	Unit
Address input capacitance	$C_{In}$	–	6	pF
Control input capacitance	$C_{In}$	–	6	pF
Input/Output capacitance	$C_{I/O}$	–	8	pF

Note: 1.  $f = 1.0\text{MHz}$ ,  $dV = 3.0\text{V}$ ,  $T_A = 25\text{°C}$ , periodically sampled rather than 100% tested.

**Table 2-6.** AC Measurement Conditions

Parameter	Value	Unit
Logic input timing measurement reference level	1.5	V
Logic output timing measurement reference level	1.5	V
Logic input pulse levels	0 or 3.0	V
Input rise/fall time	2	ns
Output load for low and high impedance parameters	See <a href="#">Figure 2-2 on page 7</a>	
Output load for all other timing parameters	See <a href="#">Figure 2-3 on page 7</a>	

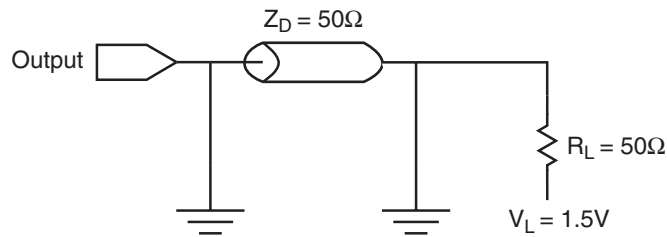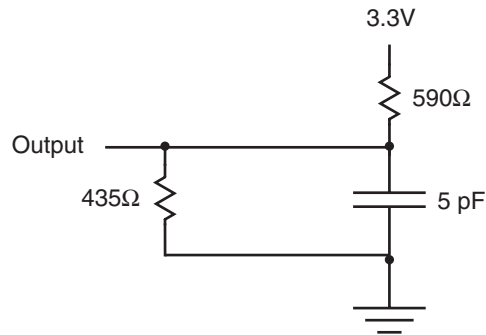**Figure 2-2.** Output Load Test Low and High**Figure 2-3.** Output Load Test All Others


## 2.3 Read Mode

**Table 2-7.** Read Cycle Timing<sup>(1)</sup>

Parameter	Symbol	Min	Max	Unit
Read cycle time	$t_{AVAV}$	35	–	ns
Address access time	$t_{AVQV}$	–	35	ns
Enable access time <sup>(2)</sup>	$t_{ELQV}$	–	35	ns
Output enable access time	$t_{GLQV}$	–	15	ns
Output hold from address change	$t_{AXQX}$	3	–	ns
Enable low to output active <sup>(3)</sup>	$t_{ELQX}$	3	–	ns
Output enable low to output active <sup>(3)</sup>	$t_{GLQX}$	0	–	ns
Enable high to output Hi-Z <sup>(3)</sup>	$t_{EHQZ}$	0	15	ns
Output enable high to output Hi-Z <sup>(3)</sup>	$t_{GHQZ}$	0	10	ns


- Notes:
- $\bar{W}$  is high for read cycle. Power supplies must be properly grounded and decoupled, and bus contention conditions must be minimized or eliminated during read or write cycles.
  - Addresses valid before or at the same time  $\bar{E}$  goes low.
  - This parameter is sampled and not 100% tested. Transition is measured  $\pm 200$  mV from the steady-state voltage.

**Figure 2-4. Read Cycle 1**

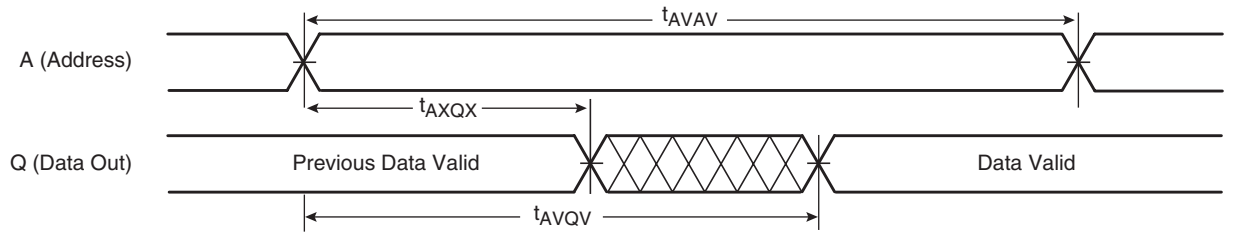

Note: Device is continuously selected ( $\bar{E} \leq V_{IL}$ ,  $\bar{G} \leq V_{IL}$ ).

**Figure 2-5. Read Cycle 2**

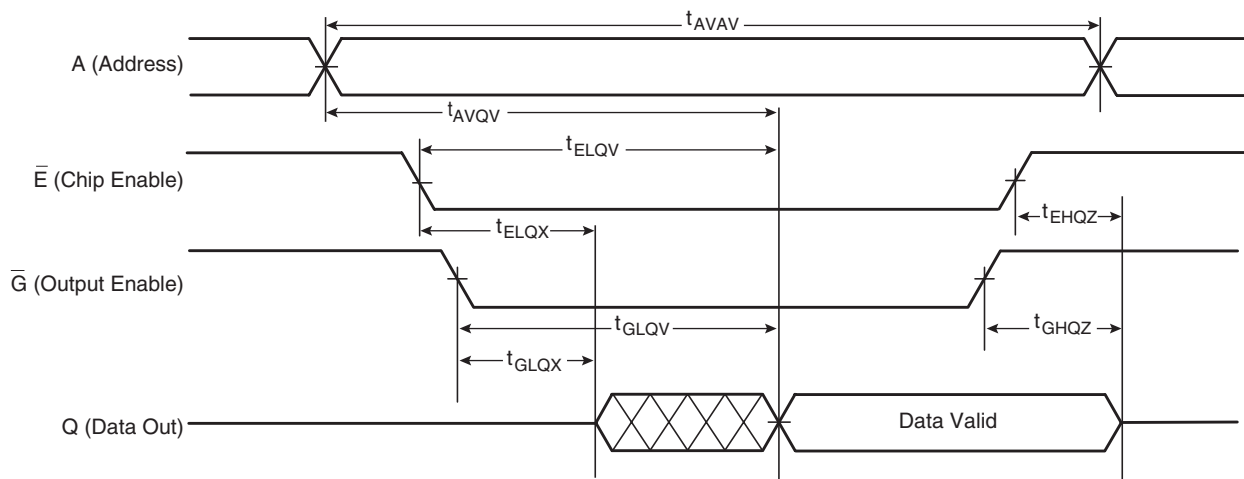




## 2.4 Write Mode

**Table 2-8.** Write Cycle Timing 1 ( $\overline{W}$  Controlled)<sup>(1)</sup>

Parameter	Symbol	Min	Max	Unit
Write cycle time <sup>(2)</sup>	$t_{AVAV}$	35	–	ns
Address set-up time	$t_{AVWL}$	0	–	ns
Address valid to end of write ( $\overline{G}$ high)	$t_{AVWH}$	18	–	ns
Address valid to end of write ( $\overline{G}$ low)	$t_{AVWH}$	20	–	ns
Write pulse width ( $\overline{G}$ high)	$t_{WLWH}$ $t_{WLEH}$	15	–	ns
Write pulse width ( $\overline{G}$ low)	$t_{WLWH}$ $t_{WLEH}$	15	–	ns
Data valid to end of write	$t_{DVWH}$	10	–	ns
Data hold time	$t_{WHDX}$	0	–	ns
Write low to data Hi-Z <sup>(3)</sup>	$t_{WLQZ}$	0	12	ns
Write high to output active <sup>(3)</sup>	$t_{WHQX}$	3	–	ns
Write recovery time	$t_{WHAX}$	12	–	ns

- Notes:
1. All write occurs during the overlap of  $\overline{E}$  low and  $\overline{W}$  low. Power supplies must be properly grounded and decoupled and bus contention conditions must be minimized or eliminated during read and write cycles. If  $\overline{G}$  goes low at the same time or after  $\overline{W}$  goes low, the output will remain in a high impedance state. After  $\overline{W}$  or  $\overline{E}$  has been brought high, the signal must remain in steady-state high for a minimum of 2 ns. The minimum time between  $\overline{E}$  being asserted low in one cycle to  $\overline{E}$  being asserted low in a subsequent cycle is the same as the minimum cycle time allowed for the device.
  2. All write cycle timings are referenced from the last valid address to the first transition address.
  3. This parameter is sampled and not 100% tested. Transition is measured  $\pm 200$  mV from the steady-state voltage. At any given voltage or temperature,  $t_{WLQZ}(\text{max}) < t_{WHQX}(\text{min})$ .

**Figure 2-6.** Write Cycle Timing 1 ( $\overline{W}$  Controlled)

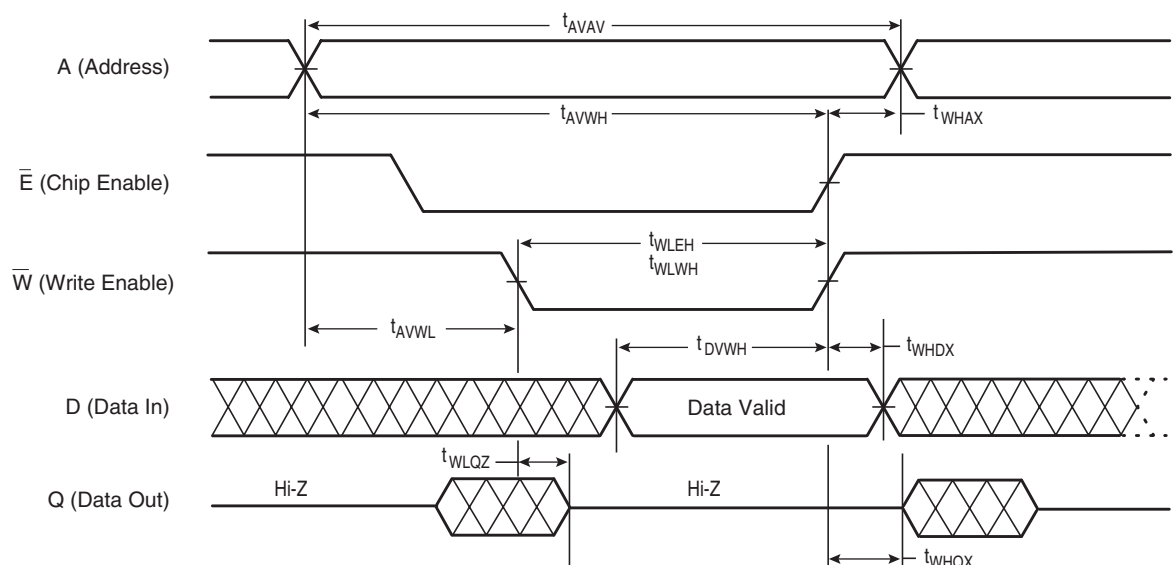


**Table 2-9.** Write Cycle Timing 2 ( $\bar{E}$  Controlled)<sup>(1)</sup>

Parameter	Symbol	Min	Max	Unit
Write cycle time <sup>(2)</sup>	$t_{AVAV}$	35	–	ns
Address set-up time	$t_{AVEL}$	0	–	ns
Address valid to end of write ( $\bar{G}$ high)	$t_{AVEH}$	18	–	ns
Address valid to end of write ( $\bar{G}$ low)	$t_{AVEH}$	20	–	ns
Enable to end of write ( $\bar{G}$ high)	$t_{ELEH}$ $t_{ELWH}$	15	–	ns
Enable to end of write ( $\bar{G}$ low) <sup>(3)</sup>	$t_{ELEH}$ $t_{ELWH}$	15	–	ns
Data valid to end of write	$t_{DVEH}$	10	–	ns
Data hold time	$t_{EHDX}$	0	–	ns
Write recovery time	$t_{EHAX}$	12	–	ns


- Notes:
1. All write occurs during the overlap of  $\bar{E}$  low and  $\bar{W}$  low. Power supplies must be properly grounded and decoupled and bus contention conditions must be minimized or eliminated during read and write cycles. If  $\bar{G}$  goes low at the same time or after  $\bar{W}$  goes low, the output will remain in a high impedance state. After  $\bar{W}$  or  $\bar{E}$  has been brought high, the signal must remain in steady-state high for a minimum of 2 ns. The minimum time between  $\bar{E}$  being asserted low in one cycle to  $\bar{E}$  being asserted low in a subsequent cycle is the same as the minimum cycle time allowed for the device.
  2. All write cycle timings are referenced from the last valid address to the first transition address.
  3. If  $\bar{E}$  goes low at the same time or after  $\bar{W}$  goes low, the output will remain in a high-impedance state. If  $\bar{E}$  goes high at the same time or before  $\bar{W}$  goes high, the output will remain in a high-impedance state.

**Figure 2-7.** Write Cycle Timing 2 ( $\bar{E}$  Controlled)

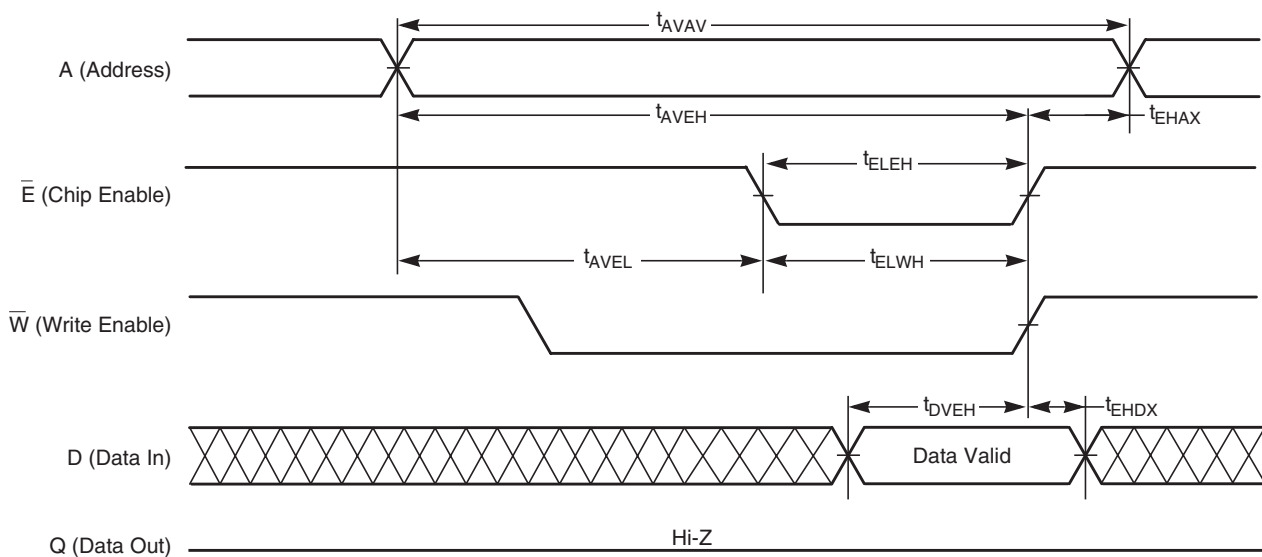

### 3. Mechanical Drawing

Figure 3-1. TSOP-II

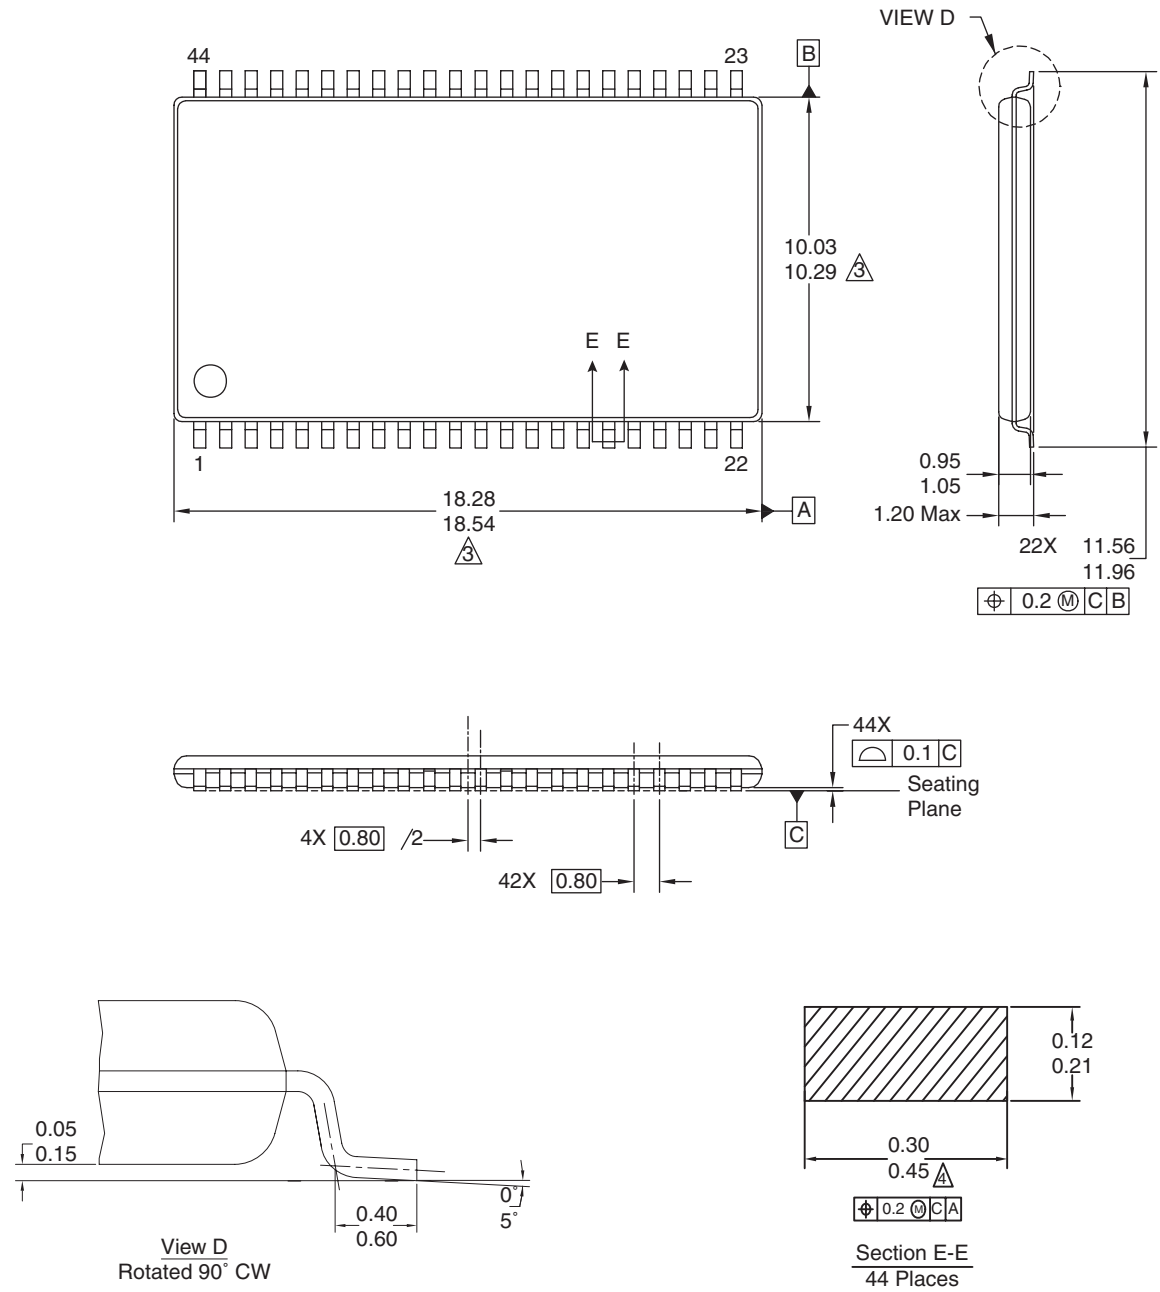

Print Version Not To Scale

1. Dimensions and tolerances per ASME Y14.5M - 1994.
2. Dimensions in Millimeters.
3. Dimensions do not include mold protrusion.
4. Dimension does not include DAM bar protrusions.  
DAM Bar protrusion shall not cause the lead width to exceed 0.58.

## 4. Ordering Information

Figure 4-1. Ordering Information <sup>(1)</sup>

EV	2	A	16	A	x	N	Y	U	35
	Density Code	Memory Type	I/O Configuration	Revision	Operating Temperature Range	Package Type	RoHS compliance	Upscreening	Timing Set
e2v Prefix	2 = 4 Mb	A = async	08 = 08 bits	A = 180 nm	V = -40 to 110°C M = -55 to 125°C	N = TSOP II ZP = PBGA	Y: RoHS <sup>(2)</sup> compliant	U	35 = 35 ns

- Notes: 1. For availability of the different versions, contact your local e2v sales office.  
2. Lead finishing: pure tin (Sn 99,99%)

## 5. Document Revision History

Table 5-1 provides a revision history for this hardware specification.

Table 5-1. Document Revision History

Rev. No	Date	Substantive Change(s)
1024B	28/09/10	Updated <a href="#">Table 2-2 on page 4</a> .
1024A	06/2010	Initial revision.



## How to reach us

Home page: [www.e2v.com](http://www.e2v.com)

### Sales offices:

#### Europe Regional sales office

##### e2v ltd

106 Waterhouse Lane  
Chelmsford Essex CM1 2QU  
England

Tel: +44 (0)1245 493493

Fax: +44 (0)1245 492492

mailto: [enquiries@e2v.com](mailto:enquiries@e2v.com)

##### e2v sas

16 Burospace  
F-91572 Bièvres Cedex  
France

Tel: +33 (0) 16019 5500

Fax: +33 (0) 16019 5529

mailto: [enquiries-fr@e2v.com](mailto:enquiries-fr@e2v.com)

##### e2v gmbh

Industriestraße 29  
82194 Gröbenzell  
Germany

Tel: +49 (0) 8142 41057-0

Fax: +49 (0) 8142 284547

mailto: [enquiries-de@e2v.com](mailto:enquiries-de@e2v.com)

#### Americas

##### e2v inc

520 White Plains Road  
Suite 450 Tarrytown, NY 10591  
USA

Tel: +1 (914) 592 6050 or 1-800-342-5338,

Fax: +1 (914) 592-5148

mailto: [enquiries-na@e2v.com](mailto:enquiries-na@e2v.com)

#### Asia Pacific

##### e2v ltd

11/F.,  
Onfem Tower,  
29 Wyndham Street,  
Central, Hong Kong

Tel: +852 3679 364 8/9

Fax: +852 3583 1084

mailto: [enquiries-ap@e2v.com](mailto:enquiries-ap@e2v.com)

#### Product Contact:

e2v

Avenue de Rochepleine  
BP 123 - 38521 Saint-Egrève Cedex  
France

Tel: +33 (0)4 76 58 30 00

#### Hotline:

mailto: [std-hotline@e2v.com](mailto:std-hotline@e2v.com)

Whilst e2v has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.