



| Parameters             | Ratings | Units          |
|------------------------|---------|----------------|
| Blocking Voltage       | 350     | V <sub>P</sub> |
| Load Current           | 100     | mA             |
| Max On-resistance      | 35      | Ω              |
| LED Current to Operate | 1       | mA             |

### Transient Protection Characteristics

| Part Number | Peak Pulse Power | V <sub>WM</sub> |
|-------------|------------------|-----------------|
| CPC1335P    | 600W             | 40.2V           |

### Features

- 100% Solid State
- Low Drive Power Requirements (TTL/CMOS Compatible)
- Arc-Free With No Snubbing Circuits
- 3750 V<sub>rms</sub> Input/Output Isolation
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable

### Applications

- Security
- Aerospace
- Industrial Controls

### Description

The CPC1335 is a 1-Form-A solid state relay with a non-dedicated bi-directional TVS diode which can be used for relay protection. Efficient MOSFET switches and photovoltaic die use Clare's patented OptoMOS® architecture to provide 3750 V<sub>rms</sub> of input to output isolation. The optically coupled output is controlled by a highly efficient GaAlAs infrared LED.

The bi-directional transient voltage suppressor is designed to meet the installation class 3 requirements of EN50130-4.

Available in an 8-pin space saving surface mount package, the CPC1335 is shipped in tubes or tape and reel.


### Approvals

- UL Recognized Component: File #E76270
- EN/IEC 60950-1 Compliant


### Ordering Information

| Part #     | Description                |
|------------|----------------------------|
| CPC1335P   | 8-Pin Flatpack (50/Tube)   |
| CPC1335PTR | 8-Pin Flatpack (1000/Reel) |

### Pin Configuration

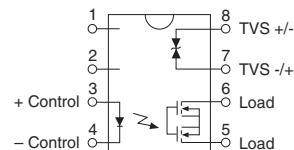

### Switching Characteristics of Normally Open (Form A) Devices

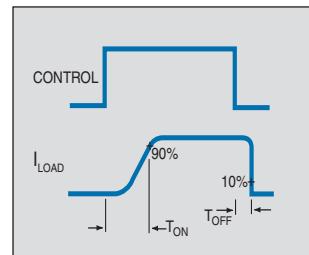

## Absolute Maximum Ratings

| Parameter   | Ratings     | Units            |
|---|-------------|------------------|
| SSR Output Blocking Voltage   | 350         | V <sub>P</sub>   |
| TVS Working Voltage, Maximum (V <sub>WM</sub> )                                     | 40.2        | V                |
| Reverse Input Voltage   | 5           | V                |
| Input Control Current<br>Peak (10ms)  | 50<br>1     | mA<br>A          |
| Input Power Dissipation <sup>1</sup>  | 150         | mW               |
| SSR Output Power Dissipation <sup>2</sup>   | 400         | mW               |
| TVS Peak Pulse Power (P <sub>PP</sub> )<br>(I <sub>PP</sub> =9.3A, 10/1000μs pulse) | 600         | W                |
| Isolation Voltage Input to Output   | 3750        | V <sub>rms</sub> |
| Operating Temperature   | -40 to +85  | °C               |
| Storage Temperature   | -40 to +125 | °C               |

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

<sup>1</sup> Derate Linearly 1.33 mw / °C

<sup>2</sup> Derate Linearly 6.67 mw / °C

Electrical absolute maximum ratings are at 25°C

## Electrical Characteristics

| Parameters                              | Conditions                               | Symbol            | Min | Typ | Max | Units |
|---|--|-------------------|-----|-----|-----|-------|
| <b>Output Characteristics @ 25°C</b>    |  |                   |     |     |     |       |
| Load Current<br>Continuous <sup>1</sup> | I <sub>F</sub> =2mA                      | I <sub>L</sub>    | -   | -   | 100 | mA    |
|   | t=10ms                                   | I <sub>LPK</sub>  | -   | -   | 350 |       |
| On-resistance <sup>2</sup>              | I <sub>L</sub> =100mA                    | R <sub>ON</sub>   | -   | 25  | 35  | Ω     |
| Off-State Leakage Current               | V <sub>L</sub> =350V                     | I <sub>LEAK</sub> | -   | -   | 1   | μA    |
| Switching Speeds                        |  |                   |     |     |     |       |
| Turn-On                                 | I <sub>F</sub> =2mA, V <sub>L</sub> =10V | T <sub>ON</sub>   | -   | -   | 10  | ms    |
| Turn-Off                                |  | T <sub>OFF</sub>  | -   | -   | 10  |       |
| Output Capacitance                      | 50V; f=1MHz                              | C <sub>OUT</sub>  | -   | 40  | -   | pF    |
| <b>Input Characteristics @ 25°C</b>     |  |                   |     |     |     |       |
| Input Control Current <sup>3</sup>      | I <sub>L</sub> =100mA                    | I <sub>F</sub>    | -   | -   | 1   | mA    |
| Input Voltage Drop                      | I <sub>F</sub> =5mA                      | V <sub>F</sub>    | 0.9 | 1.2 | 1.4 | V     |
| Reverse Input Current                   | V <sub>R</sub> =5V                       | I <sub>R</sub>    | -   | -   | 10  | μA    |
| <b>Common Characteristics @ 25°C</b>    |  |                   |     |     |     |       |
| Input to Output Capacitance             | -  | C <sub>I/O</sub>  | -   | 3   | -   | pF    |

<sup>1</sup> Load current derates linearly from 100 mA @ 25°C to 70mA @ 85°C













<sup>2</sup> Measurement taken within 1 second of on time

<sup>3</sup> For applications requiring high temp operation (greater than 60°C) a minimum LED drive current of 3mA is recommended.

## Electrical Characteristics: TVS











| Parameters                           | Conditions             | Symbol          | Min  | Typ | Max  | Units |
|--------------------------------------|------------------------|-----------------|------|-----|------|-------|
| <b>Output Characteristics @ 25°C</b> |                        |                 |      |     |      |       |
| Clamping Voltage                     | I <sub>PP</sub> =9.3A  | V <sub>C</sub>  | -    | -   | 66.5 | V     |
| Reverse Breakdown Voltage            | I <sub>BR</sub> =1mA   | V <sub>BR</sub> | 44.4 | -   | -    | V     |
| Reverse Leakage Current              | V <sub>WM</sub> =40.2V | I <sub>D</sub>  | -    | -   | 5    | μA    |

## PERFORMANCE DATA\*

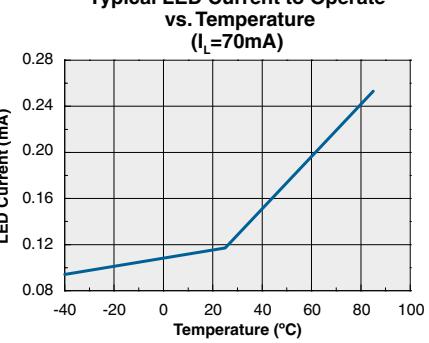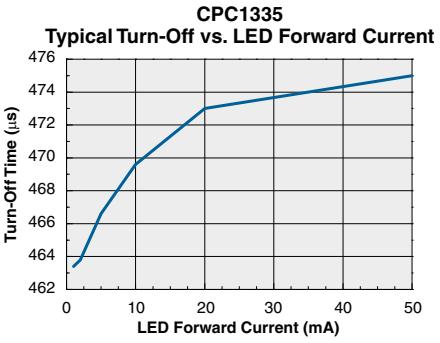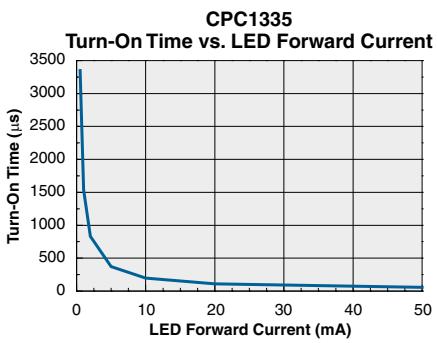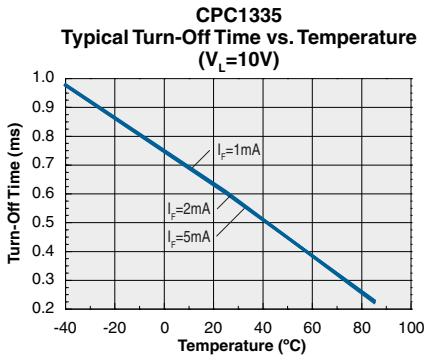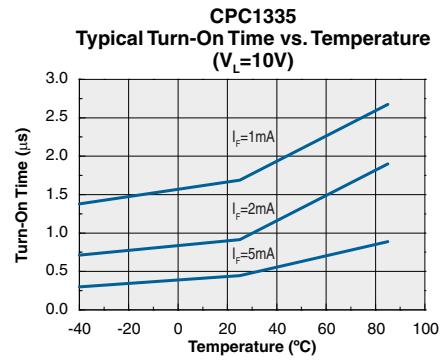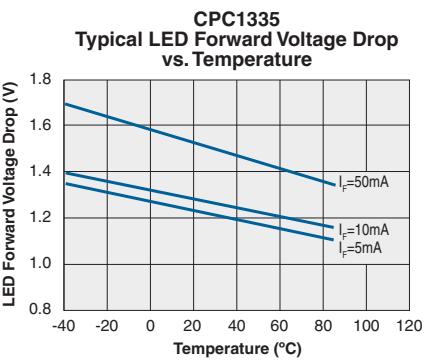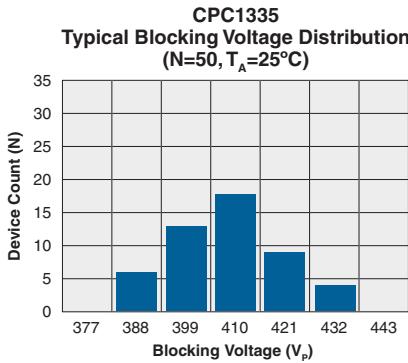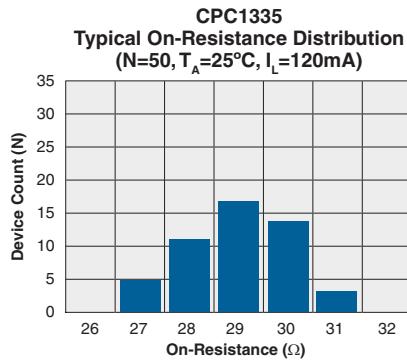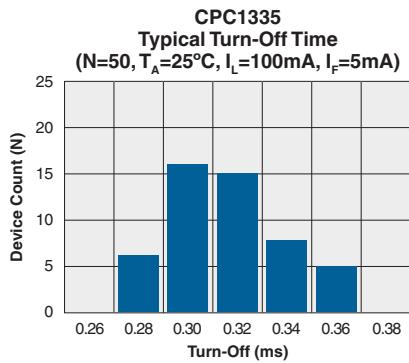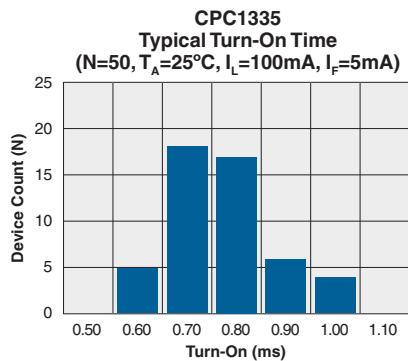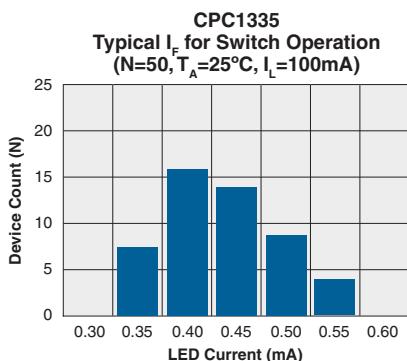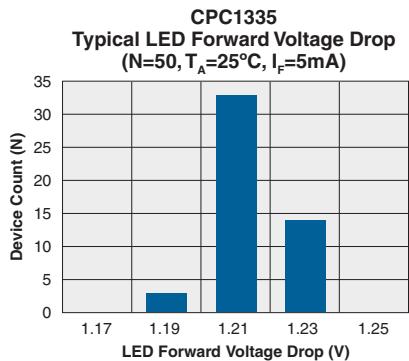

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## PERFORMANCE DATA\*

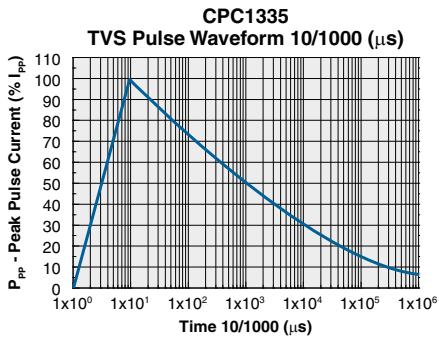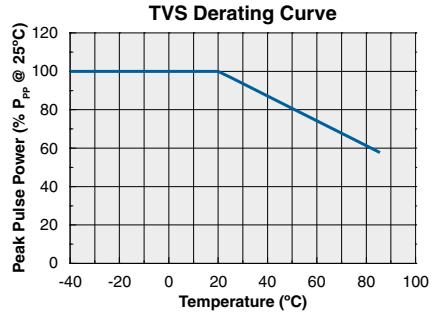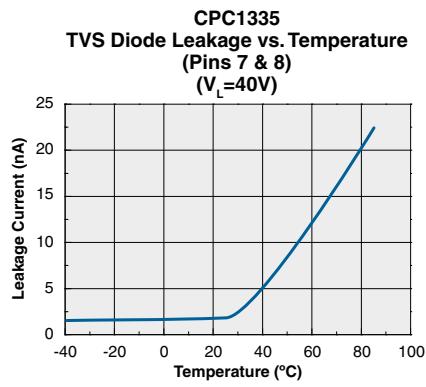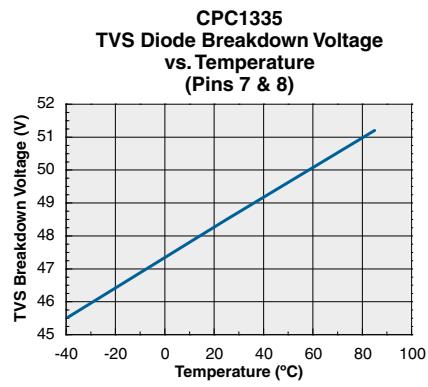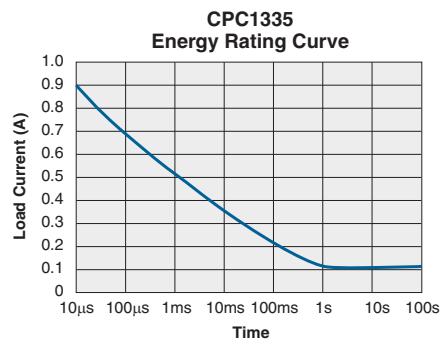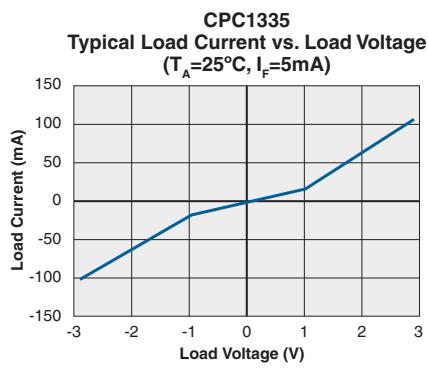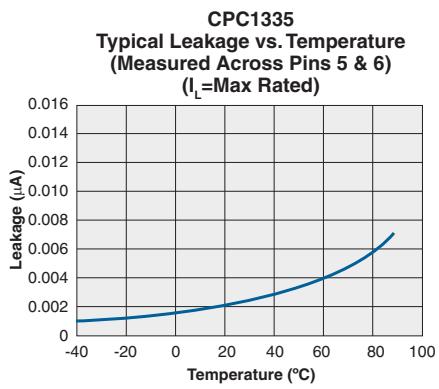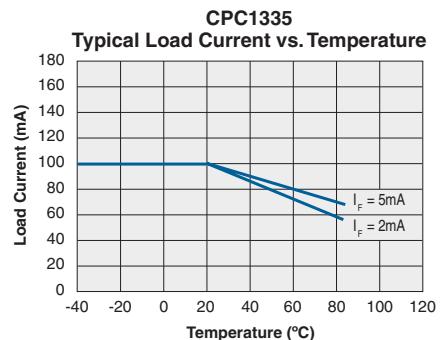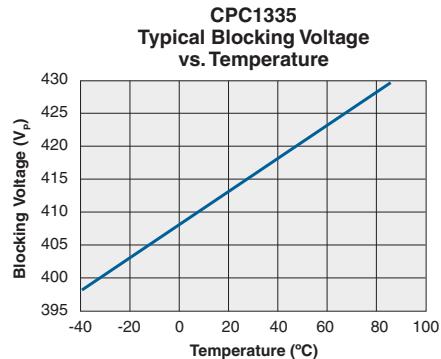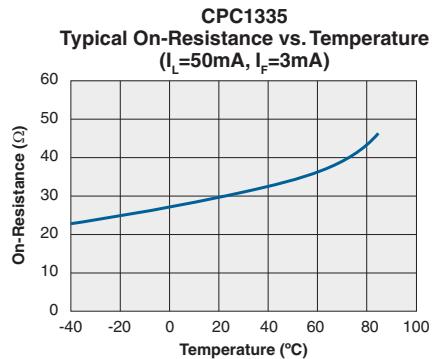

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## Manufacturing Information

### Soldering

For proper assembly, the component must be processed in accordance with the current revision of IPC/JEDEC standard J-STD-020. Failure to follow the recommended guidelines may cause permanent damage to the device resulting in impaired performance and/or a reduced lifetime expectancy.


### Washing

Clare does not recommend ultrasonic cleaning or the use of chlorinated solvents.




## MECHANICAL DIMENSIONS

### 8 Pin Flatpack Package


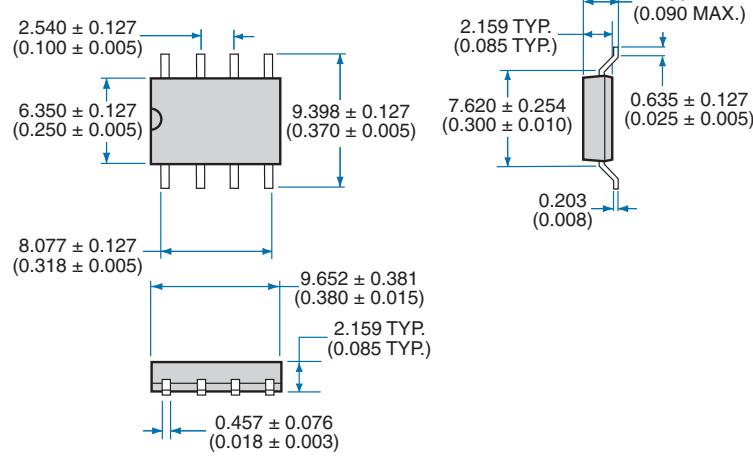


### Recommended PCB Land Pattern

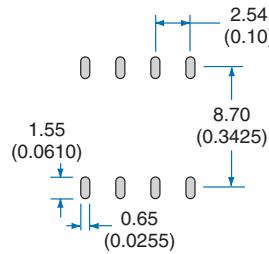

Dimensions  
mm  
(inches)

### Tape and Reel Packaging for 8 Pin Flatpack Package

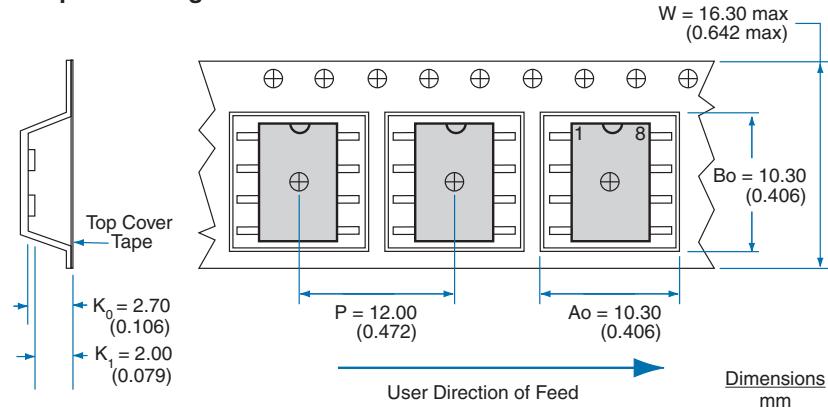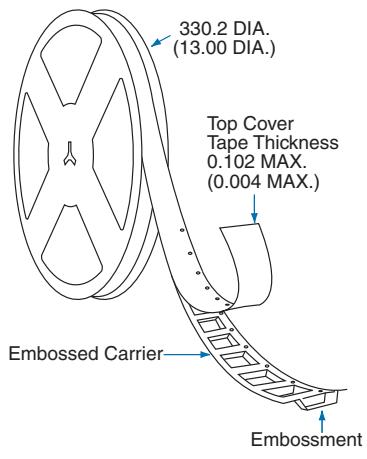

Dimensions  
mm  
(inches)

**NOTE:** Tape dimensions not shown comply with JEDEC Standard EIA-481-2

## For additional information please visit our website at: [www.clare.com](http://www.clare.com)

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.