



Monolithic N-Channel JFET Dual

PRODUCT SUMMARY				
$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	g_{fs} Min (mS)	I_G Max (pA)	$ V_{GS1} - V_{GS2} $ Max (mV)
-1.0 to -4.5	-50	1	-50	25

FEATURES

- Anti Latchup Capability
- Monolithic Design
- High Slew Rate
- Low Offset/Drift Voltage
- Low Gate Leakage: 5 pA
- Low Noise: 9 nV/√Hz
- High CMRR: 100 dB

BENEFITS

- External Substrate Bias—Avoids Latchup
- Tight Differential Match vs. Current
- Improved Op Amp Speed, Settling Time Accuracy
- Minimum Input Error/Trimming Requirement
- Insignificant Signal Loss/Error Voltage
- High System Sensitivity
- Minimum Error with Large Input Signal

APPLICATIONS

- Wideband Differential Amps
- High-Speed, Temp-Compensated, Single-Ended Input Amps
- High Speed Comparators
- Impedance Converters



DESCRIPTION

The low cost SST3958NL and U3958NL JFET duals are designed for high-performance differential amplification for a wide range of precision test instrumentation applications. This series features tightly matched specs, low gate leakage for accuracy, and wide dynamic range with I_G guaranteed at $V_{DG} = 20$ V.

Pins 4 and 8 on the SST3958NL and pin 4 on the U3958NL part numbers enable the substrate to be connected to a positive, external bias (V_{DD}) to avoid latchup.

The U3958NL in the hermetically-sealed TO-78 package is available with full military processing.

The SST3958NL in the SO-8 package provides ease of manufacturing. The symmetrical pinout prevents improper orientation. The SST3958NL is available with tape-and-reel options for compatibility with automatic assembly methods.

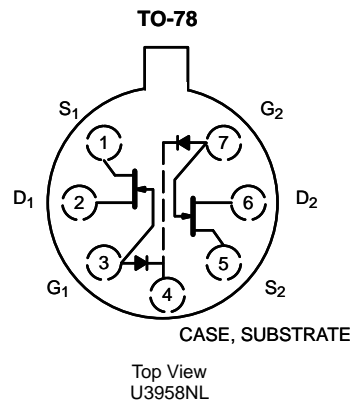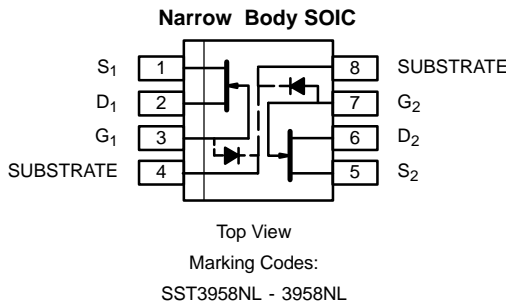

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage -50 V
 Gate Current 50 mA
 Lead Temperature ($1/16$ " from case for 10 sec.) 300 °C
 Storage Temperature -65 to 200 °C
 Operating Junction Temperature -55 to 150 °C

Power Dissipation : Per Side^a 250 mW
 Total^b 500 mW

Notes
 a. Derate 2 mW/°C above 85 °C
 b. Derate 4 mW/°C above 85 °C

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Conditions	Limits			Unit
			Min	Typ ^a	Max	
Static						
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-50	-57		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V, I _D = 1 nA	-1.0	-3	-4.5	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	0.5	5	8	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -30 V, V _{DS} = 0 V		-10	-100	pA
		T _A = 150 °C		-20	-500	nA
Gate Operating Current	I _G	V _{DG} = 20 V, I _D = 200 μA		-5	-50	pA
		T _A = 125 °C		-0.8	-250	nA
Gate-Source Voltage	V _{GS}	V _{DG} = 20 V, I _D = 200 μA	-0.5	-2.5	-4	V
		I _D = 50 μA			-4.2	
Gate-Source Forward Voltage	V _{GS(F)}	I _G = 1 mA, V _{DS} = 0 V			2	
Dynamic						
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 kHz	1	3.0	3.6	mS
Common-Source Output Conductance	g _{os}			8	35	μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 MHz		3	4	pF
Common-Source Reverse Transfer Capacitance	C _{rss}			1	1.2	
Drain-Gate Capacitance	C _{dg}	V _{DG} = 10 V, I _S = 0, f = 1 MHz			1.5	
Equivalent Input Noise Voltage	\bar{e}_n	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz		11		nV/ √Hz
Noise Figure	NF	V _{DS} = 20 V, V _{GS} = 0 V f = 100 Hz, R _G = 10 MΩ		0.5		dB
Matching						
Differential Gate-Source Voltage	V _{GS1} - V _{GS2}	V _{DG} = 20 V, I _D = 200 μA		15	25	mV
Gate-Source Voltage Differential Change with Temperature	$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	V _{DG} = 20 V, I _D = 200 μA T _A = -55 to 125 °C		20	100	μV/°C
Saturation Drain Current Ratio	$\frac{I_{DSS1}}{I_{DSS2}}$	V _{DS} = 20 V, V _{GS} = 0 V	0.85	0.97	1	
Transconductance Ratio	$\frac{g_{fs1}}{g_{fs2}}$	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.85	0.97	1	
Differential Output Conductance	g _{os1} - g _{os2}				0.1	
Differential Gate Current	I _{G1} - I _{G2}	V _{DG} = 20 V, I _D = 200 μA T _A = 125 °C		0.1	10	nA
Common Mode Rejection Ratio	CMRR	V _{DG} = 10 to 20 V, I _D = 200 μA		100		dB

Notes


- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
 b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.

NQP




TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)


Drain Current and Transconductance vs. Gate-Source Cutoff Voltage

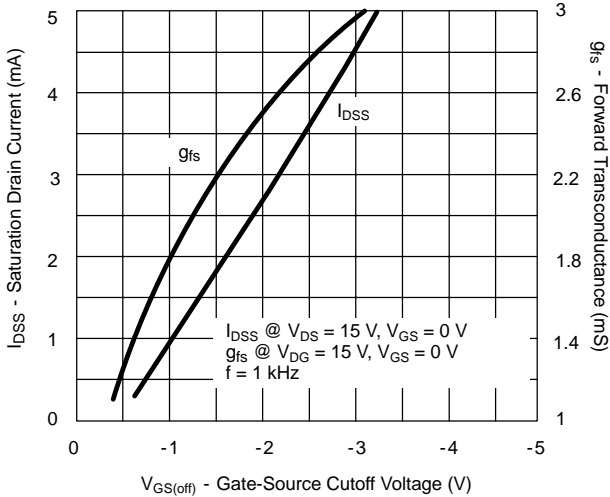


Gate Leakage Current

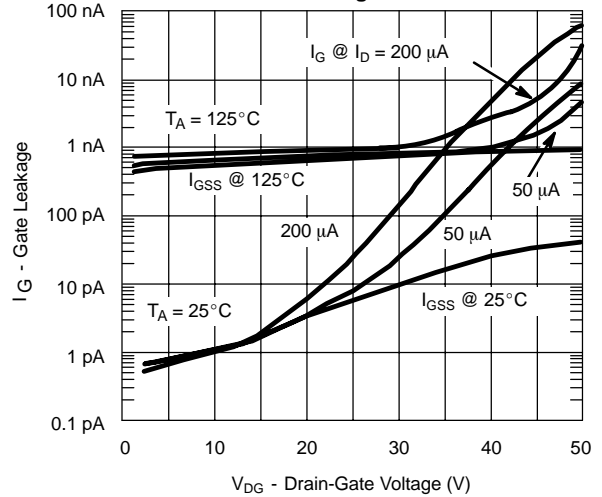


Output Characteristics

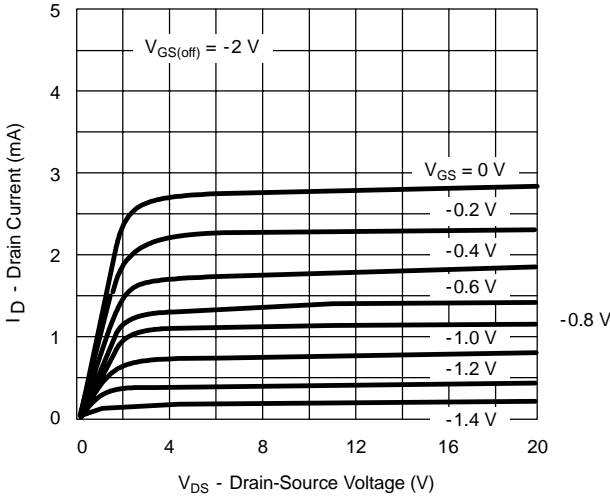


Output Characteristics

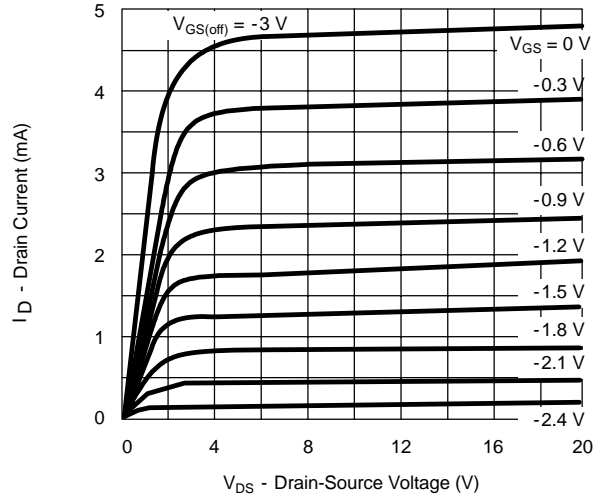







Output Characteristics

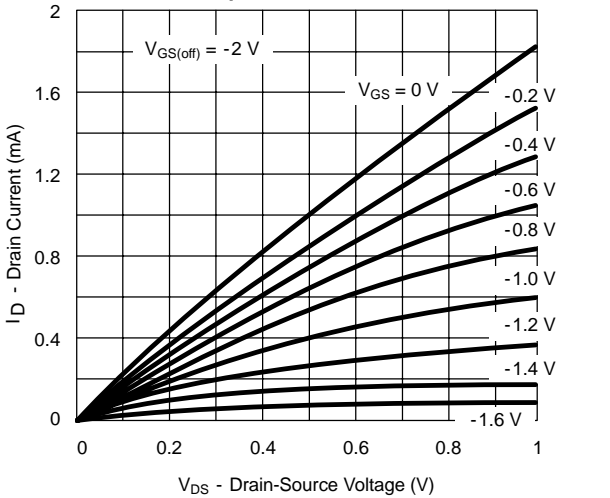

Output Characteristics

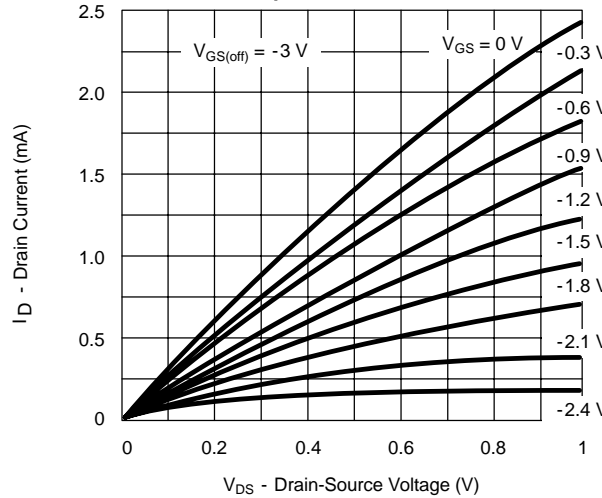


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

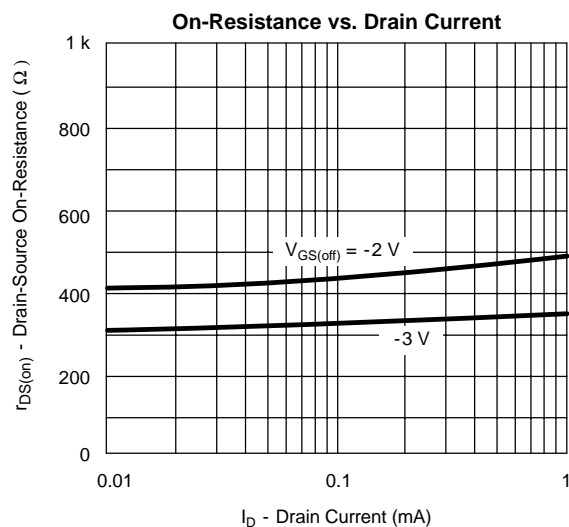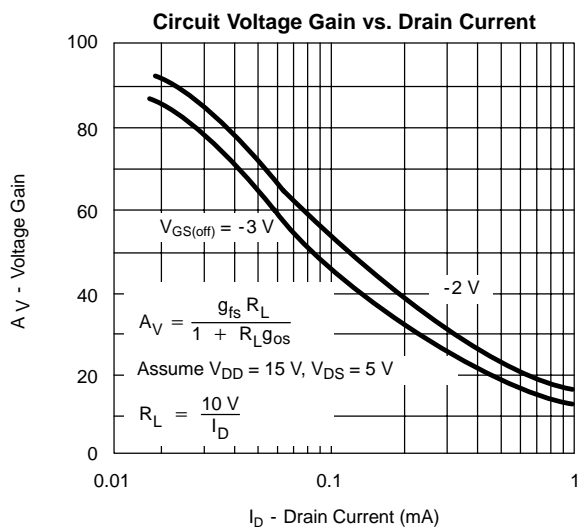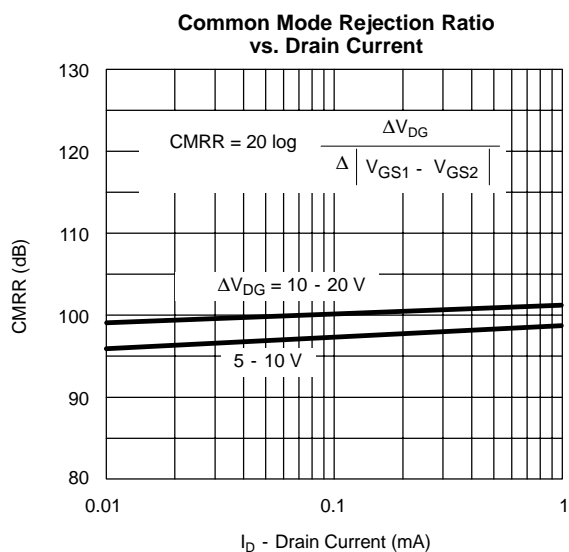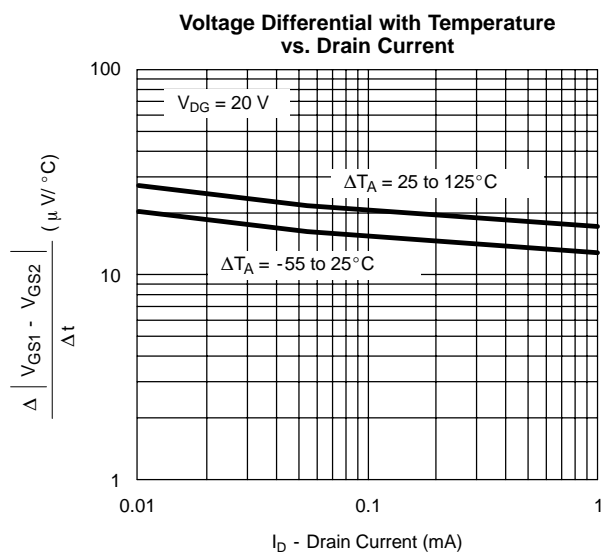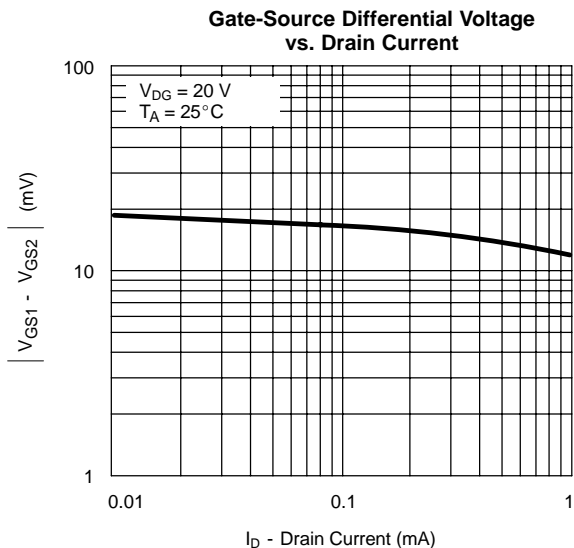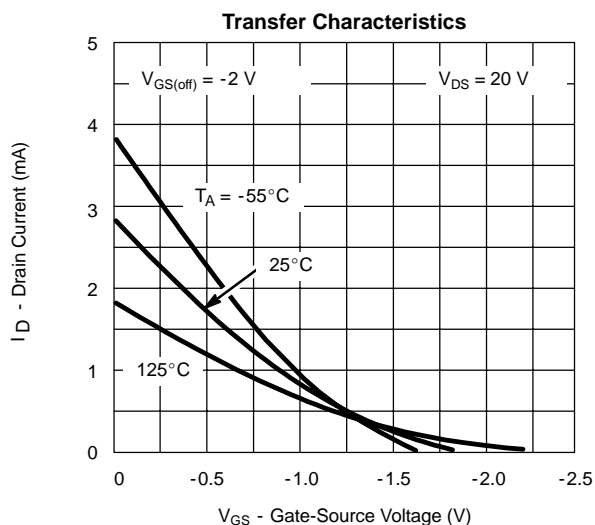




TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)


Common-Source Input Capacitance vs. Gate-Source Voltage

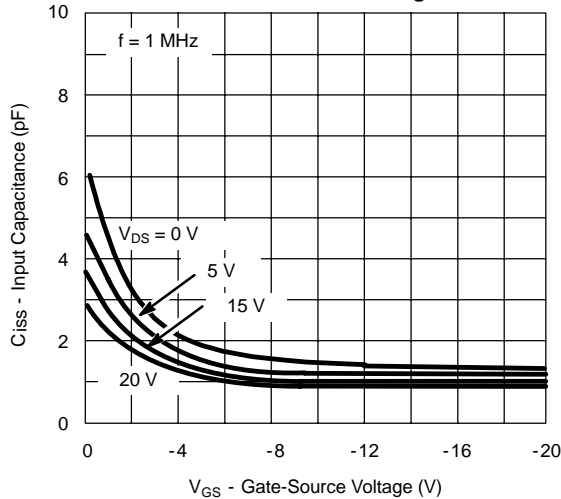


Common-Source Reverse Feedback Capacitance vs. Gate-Source Voltage

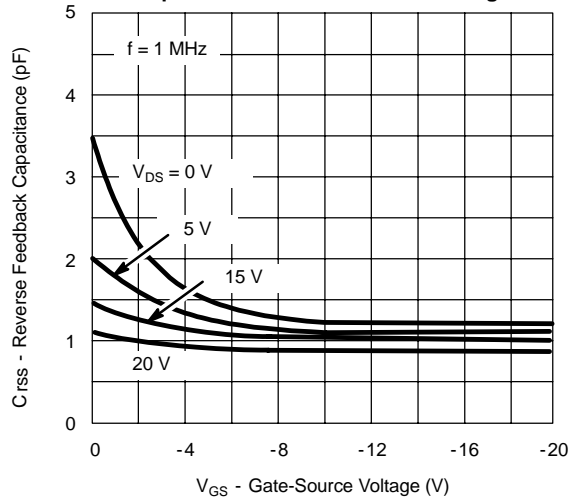


Equivalent Input Noise Voltage vs. Frequency

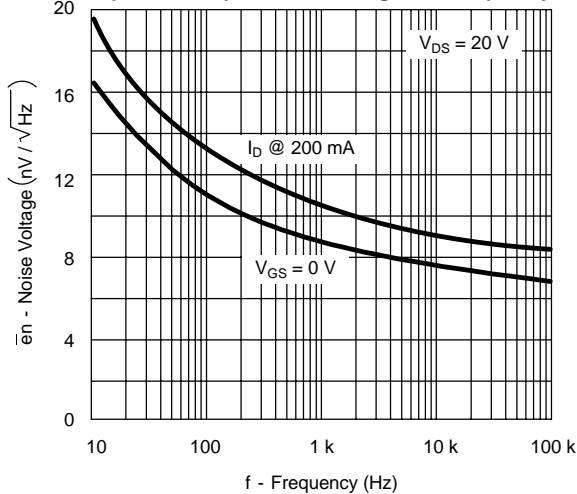


Output Conductance vs. Drain Current

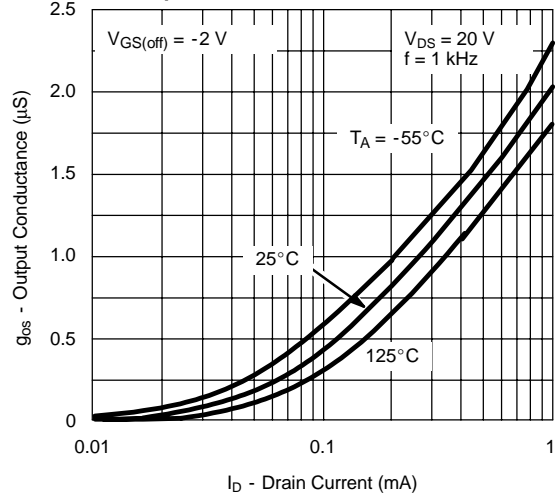

Common-Source Forward Transconductance vs. Drain Current

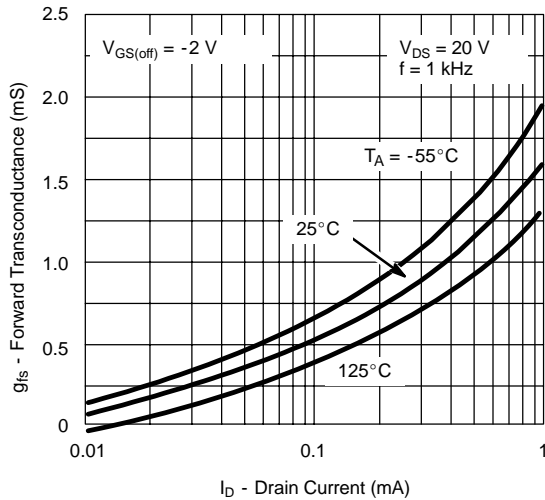

On-Resistance and Output Conductance vs. Gate-Source Cutoff Voltage

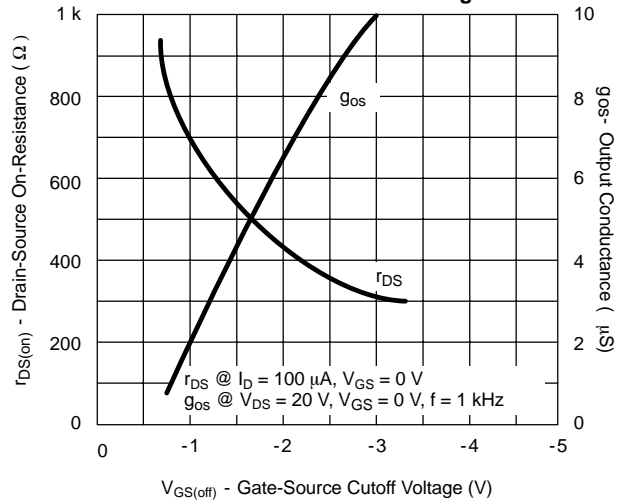



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.