


RF PIN Diodes - Dual, Common Cathode in SOT-323

Description

Characterized by low reverse Capacitance the PIN Diodes BAR64V-05W-V was designed for RF signal switching and tuning. As a function of the forward bias current the forward resistance (RF) can be adjusted over a wide range. A long carrier life time offers low signal distortion for signals over 10 MHz up to 3 GHz. Typical applications for these PIN Diodes are switches and attenuators in wireless, mobile and TV-systems.

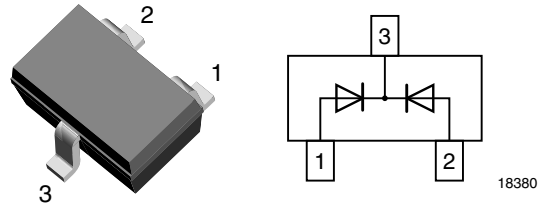

Features

- High voltage current controlled RF resistor
- Small diode capacitance
- Low series inductance
- Low forward resistance
- Improved performance due to two separate dice
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT

Mechanical Data

Case: SOT-323

Weight: approx. 5.7 mg

Packaging Codes/Options:

GS18/10K per 13" reel (8 mm tape), 10K/box

GS08/3K per 7" reel (8 mm tape), 15K/box

Applications

- For frequencies up to 3 GHz
- RF-signal tuning
- Signal attenuator and switches
- Mobile, wireless and TV-Applications

Parts Table

Part	Ordering code	Marking	Remarks
BAR64V-05W-V	BAR64V-05W-V-GS18 or BAR64V-05W-V-GS08	DW5	Tape and reel

Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Reverse voltage		V_R	100	V
Forward current		I_F	100	mA
Junction temperature		T_j	150	$^{\circ}\text{C}$
Storage temperature range		T_{stg}	- 55 to + 150	$^{\circ}\text{C}$

Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Min.	Typ.	Max.	Unit
Reverse voltage	$I_R = 10\text{ }\mu\text{A}$	V_R	100			V
Reverse current	$V_R = 50\text{ V}$	I_R			50	nA
Forward voltage	$I_F = 50\text{ mA}$	V_F			1.1	V
Diode capacitance	$f = 1\text{ MHz}, V_R = 0$	C_D		0.5		pF
	$f = 1\text{ MHz}, V_R = 1\text{ V}$	C_D		0.37	0.5	pF
	$f = 1\text{ MHz}, V_R = 20\text{ V}$	C_D		0.23	0.35	pF
Forward resistance	$f = 100\text{ MHz}, I_F = 1\text{ mA}$	r_f		10	20	Ω
	$f = 100\text{ MHz}, I_F = 10\text{ mA}$	r_f		2.0	3.8	Ω
	$f = 100\text{ MHz}, I_F = 100\text{ mA}$	r_f		0.8	1.35	Ω
Charge carrier life time	$I_F = 10\text{ mA}, I_R = 6\text{ mA}, i_{rr} = 3\text{ mA}$	t_{rr}		1.8		μs
Series inductance		L_S		1		nH

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

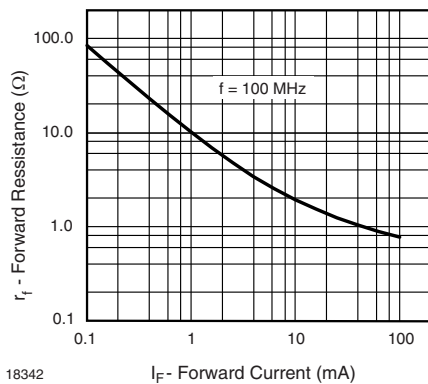


Figure 1. Forward Resistance vs. Forward Current

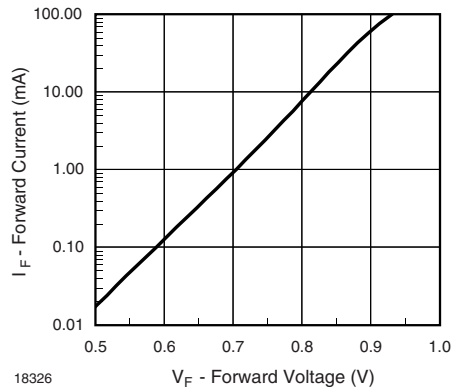


Figure 3. Forward Current vs. Forward Voltage

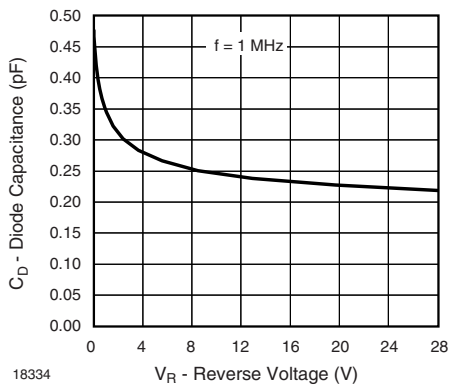


Figure 2. Diode Capacitance vs. Reverse Voltage

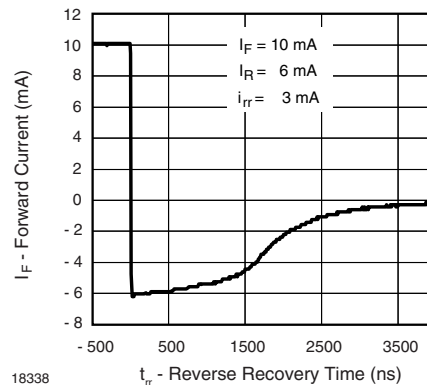


Figure 4. Typical Charge Recovery Curve

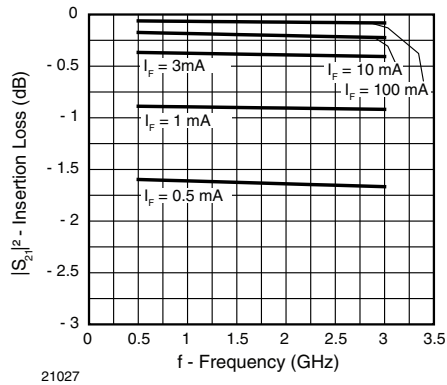


Figure 5. Insertion Loss of One Diode Inserted in Series with 50 Ω Strip Line

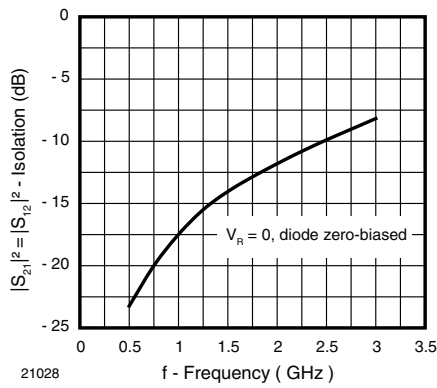


Figure 6. Isolation of One Diode Inserted in Series with 50 Ω Strip Line

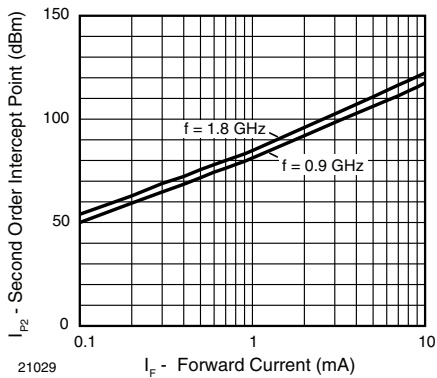



Figure 7. Second Order Intercept Point for One Diode Inserted in 50 Ω Strip Line

BAR64V-05W-V




Vishay Semiconductors

Package Dimensions in millimeters (inches): SOT-323

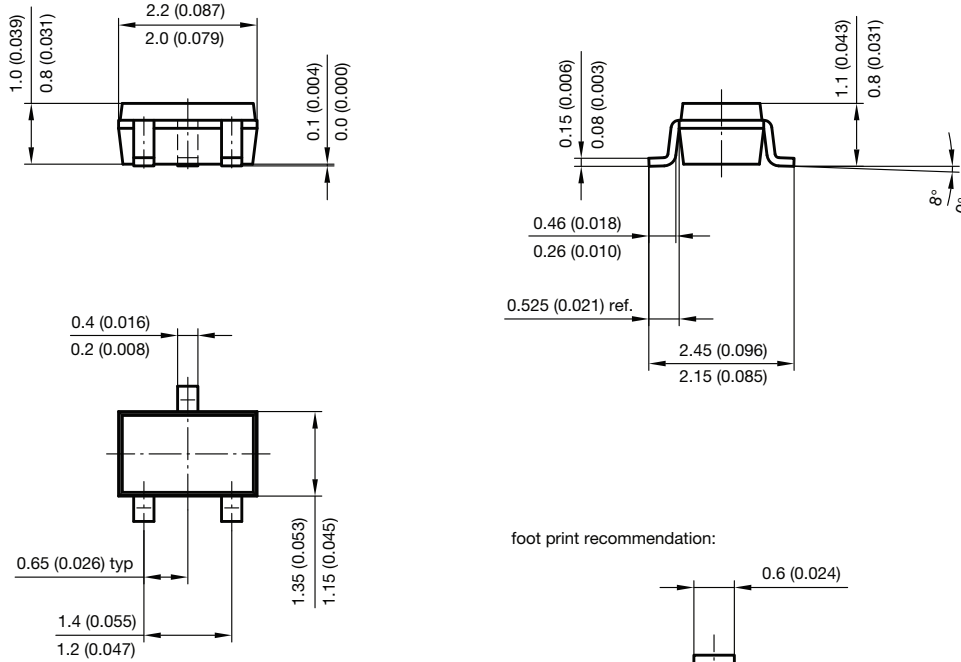

foot print recommendation:

Document no.: 6.541-5040.02-4
Rev. 1 - Date: 06. April 2010
21113

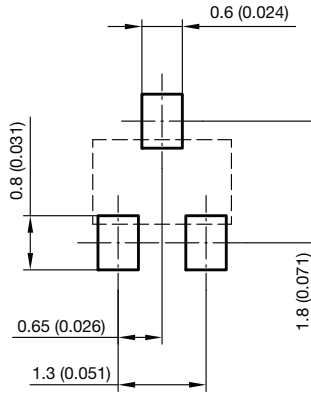



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.