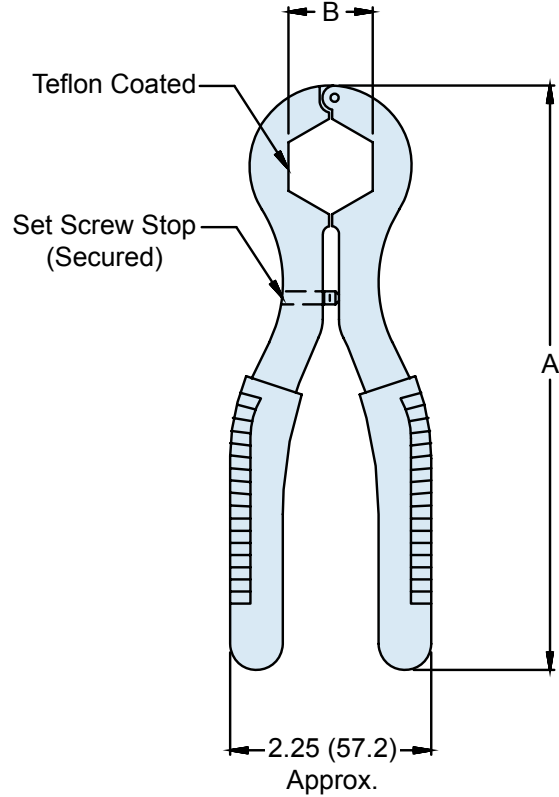
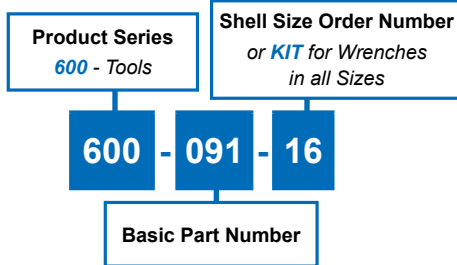


## ALUMINUM TOOL FOR USE WITH GLENAIR COMPOSITE BACKSHELLS



**TABLE I: SHELL SIZE ORDER NUMBER**

Order No.	A Ref.	B Hex	Shell Size Ref.	Composite Torque Inch Pounds
08	7.38 (187.5)	.750 (19.1)	08/09	40
10	7.50 (190.5)	.875 (22.2)	10/11	40
12	7.50 (190.5)	1.000 (25.4)	12/13	40
14	7.50 (190.5)	1.125 (28.6)	14/15	40
16	7.50 (190.5)	1.250 (31.8)	16/17	40
18	7.75 (196.9)	1.375 (34.9)	18/19	40
20	8.00 (203.2)	1.500 (38.1)	20/21	80
22	8.25 (209.6)	1.625 (41.3)	22/23	80
24	8.25 (209.6)	1.750 (44.5)	24/25	80
28	8.50 (215.9)	2.000 (50.8)	28	120
32	10.00 (254.0)	2.250 (57.2)	32	120
36	10.00 (254.0)	2.500 (63.5)	36	120

### APPLICATION NOTES

1. Metric dimensions (mm) are in parentheses and are for reference only.
2. B Hex is critical, adjust set screw until dimension is within tolerance (+/- .005)
3. This backshell assembly tool is designed for Glenair composite hex coupling applications and should be used in conjunction with Glenair torque wrenches.
4. These wrenches are made of aluminum alloy with vinyl grips.

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor