

# OMRON

NEW


## Smart Sensors

ZG-series 2D Profile Measuring Sensors



## 2D Profile Measuring Sensors

Ultra Wide Laser Beam & Super High-speed Measurement

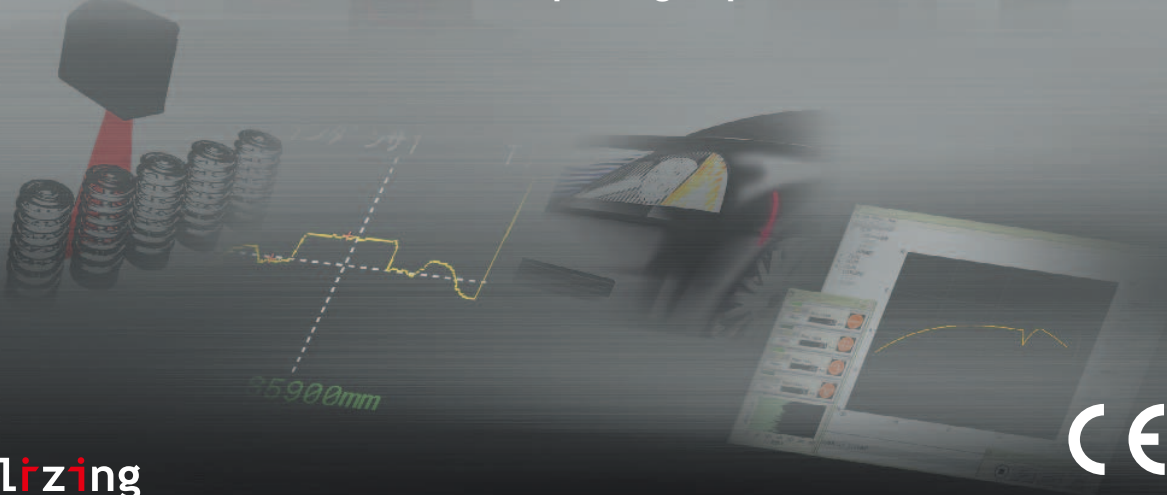


realizing

CE

**The Industry's First**

# A wide laser beam captures

A new Smart Sensor debuts with a light-section method

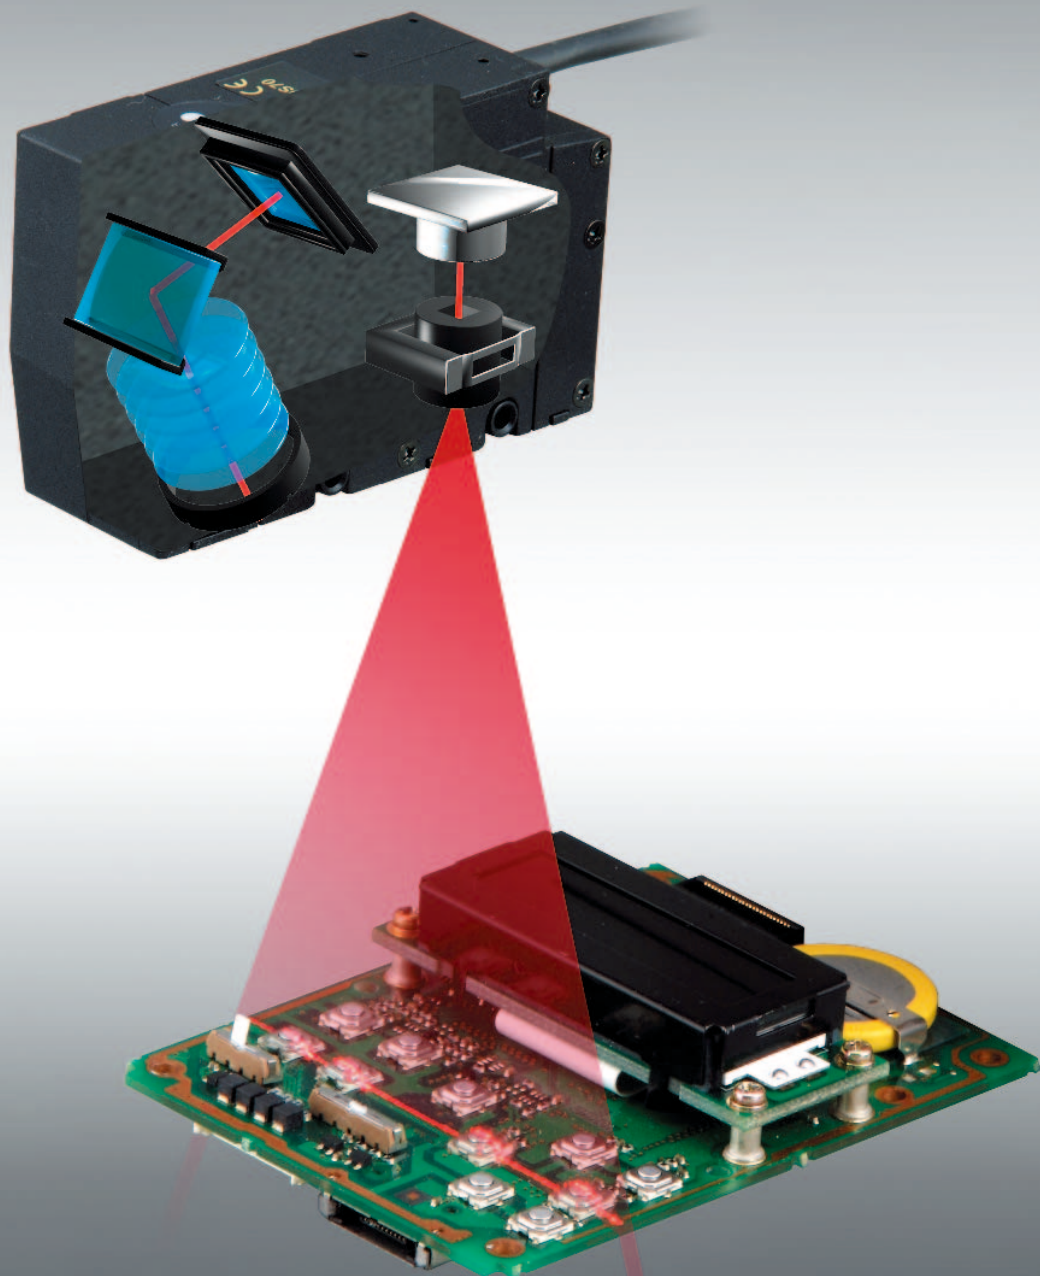


# entire shapes with ease.

that visualizes cross-sectional shapes.

**Patent Pending**

## Three basic steps

An advanced interface maximizes the sensing performance with extremely simple operation.

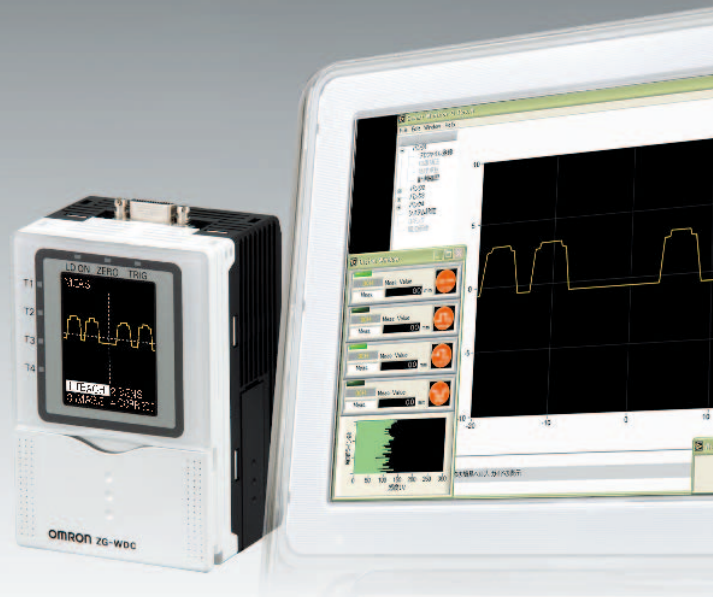

**1st**  
Display the profile.

The profile is displayed as soon as the power is turned ON.\*  
The Sensor Head position can be adjusted while viewing the profile on the screen.  
\*In FUN mode.

**2nd**  
Select the measurement item.

Select the icon for the item to be measured, such as height, step, or cross-sectional area.

**3rd**  
Designate the measurement range.


Simply enclose the range to be measured with the box. The ZG automatically optimizes the sensing conditions.

\*Screen images are simulated.


**High-speed Inspection**

**High-speed, continuous sampling meets the needs of processes where speed is required.**

Inspecting fluid application for formed-in-place gaskets (FIPG) (ZG-WDS22/70)

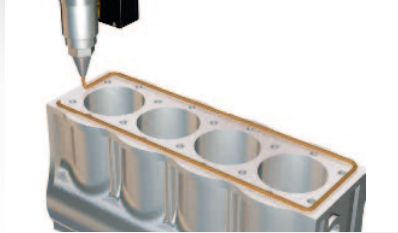

- Measure continuous motion on a robot arm
- Continuously output profiles




**High-speed processing technology**

Equipped with the **PI-Express** image processing core engine.

**Newly developed**


**Principle**




All processing is done digitally, from sensing input to output. The generation of shape profile data and measurement functions that were conventionally handled by a microprocessor are built into a single chip. Use of the newly developed PI Express (see note) LSI speeds up processing and saves space.

Note: Profile- Image-Express

**Effect**



The response time required from receiving an external input (trigger) to outputting complete profile data via USB is 100 ms (see note) maximum.



Note: Varies depending on the measurement mode.


**High-precision Shape Measurement**

**The shape of the measurement object is completely reproduced with high precision.**

Inspecting vehicle body gaps (ZG-WDS22/70)



- High-precision measurement of the width of grooves during vehicle assembly




**Multi-sensitivity Function Patent Pending**

When a laser is directed at a complicated shape, the light often does not effectively reflect from parts on which the beam strikes at an angle. This causes a part of the profile to be lost and makes it impossible to reproduce the shape. The multi-sensitivity function of the ZG-series 2D Shape Sensors determines the optimal sensitivity for each line to reproduce the shape profile.


**Principle**

While switching sensitivity levels for workpieces with reflectivity that varies from part to part, the Sensor inputs multiple images and combines them into a single image with the optimal sensitivity for each part. This produces an image of the entire workpiece.



Example: A mountain-shaped workpiece in which the reflectivity varies from that of the reference plane.

**Effect**




This part of the reflected light does not directly enter the CCD.

Image obtained from ordinary processing.





Image obtained when using the multi-sensitivity function.




**Simple Shape Measurement**

## Teaching enables simple shape distinguishing and positioning.


Distinguishing the shape of a pin boss (ZG-WDS22)

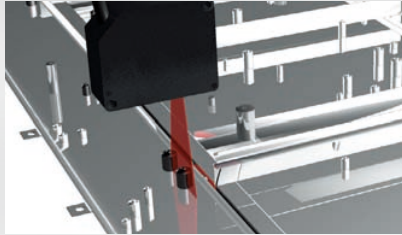

• Convex or concave pin bosses can be easily distinguished.



Concave pin




Convex pin

Checking the shape of vehicle structural parts (ZG-WDS22)



• The wide beam allows vehicle structural parts to be measured in a single operation.




**Reflective-type Sensor**



## Installs easily just about anywhere.

The wide beam enables stable, reflective measurement when mounting limitations do not allow a through-beam configuration to be used or when measuring the ends of warped panels, which is difficult for through-beam systems.

- Measuring the thickness of metal panels while they are being conveyed

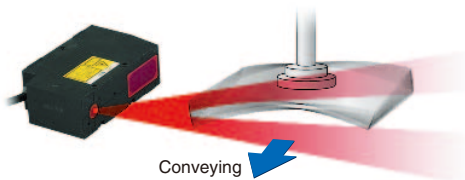

- Measuring the end of warped panels

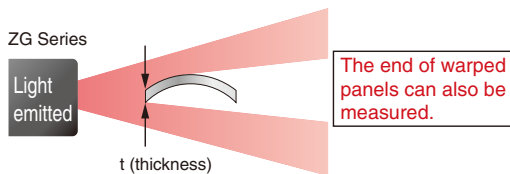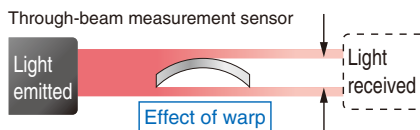


**High-precision Displacement Sensor**

## Virtually any object can be measured.


The advantages of the wide beam are not limited to shape measurement. The line beam averages slightly irregular reflections from a bumpy surface to provide a level of precision that was not possible with conventional displacement sensors.

- OMRON ZS-series Displacement Sensor

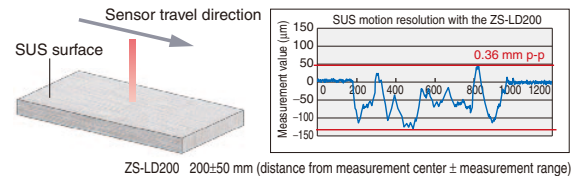

ZS-LD200 200±50 mm (distance from measurement center ± measurement range)

- ZG Series

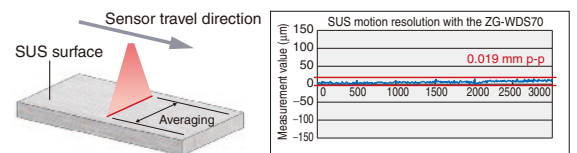

ZG-WDS70 210±30 mm (distance from measurement center ± measurement range)


Note: Shows the result of using the entire line, with the Sensor being used as a wide displacement gauge.

# Flexible Mode Selection — From High Speed to High Precision

■ Flexible Measurement Technology **Patent Pending**

## Principle


Light-section method

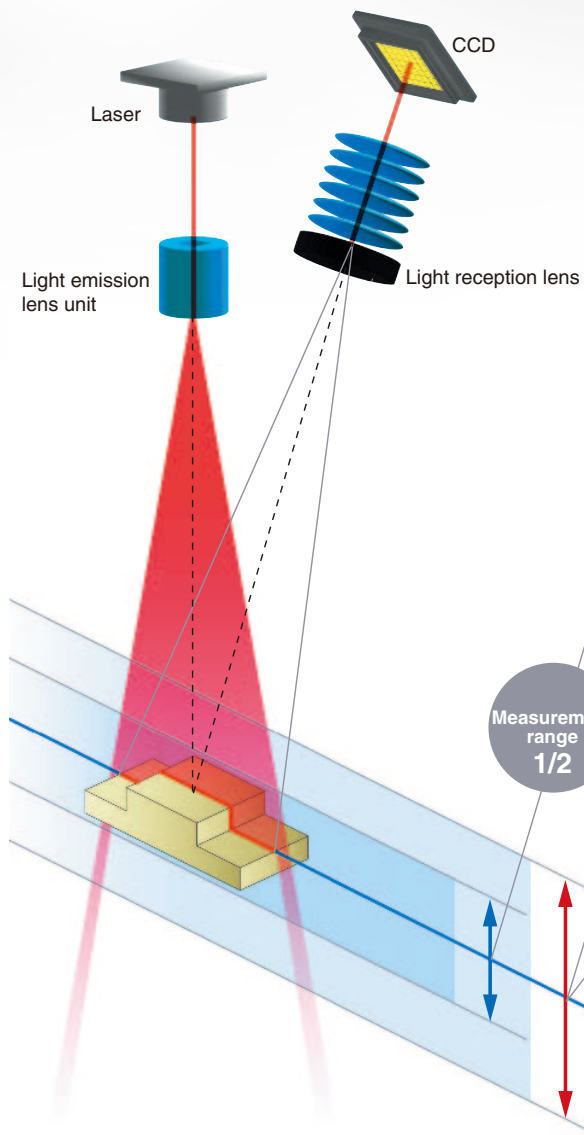


## Effect

Functions to alter the measuring precision in the displacement direction and change the sampling period are provided for the first time on a displacement sensor using the light-section method. Also, installation is easy because the measurement center distance remains fixed even when the measurement made is changed.

### High-speed mode — 5ms

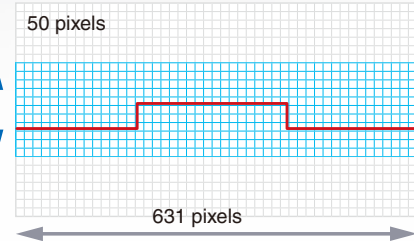


### Standard mode — 8ms

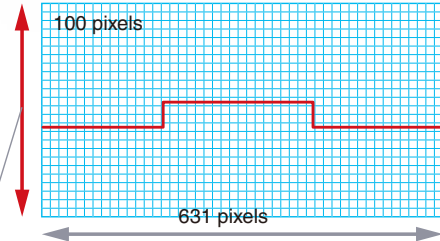

Pixel size: 1/4


### High-precision mode — 16ms

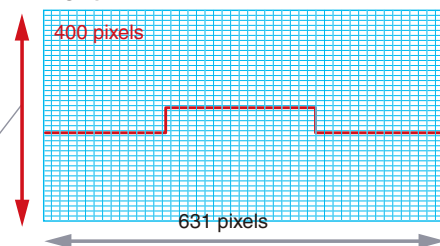

The measurement center distance remains fixed.


## High-speed Mode

A fast 5 ms satisfies the needs of processes that require speed.

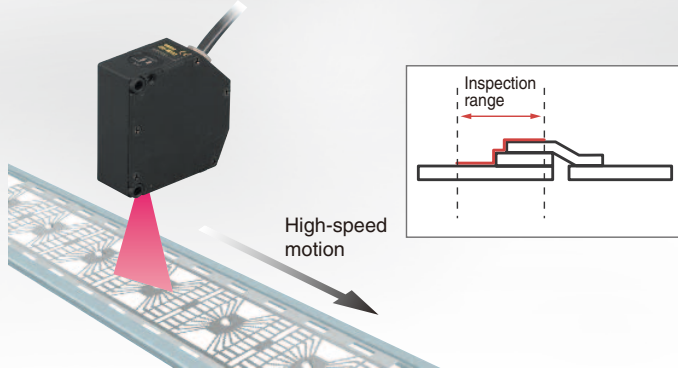

Measuring chip height above a lead frame (ZG-WDS3)


### High-speed mode — 5ms

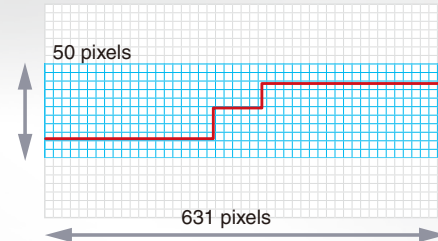

By limiting the measurement range to 1/2, high-speed inspections as fast as 5 ms are possible.


## High-precision Mode

Completely reproduces the shape of the measurement object to measure with high precision.

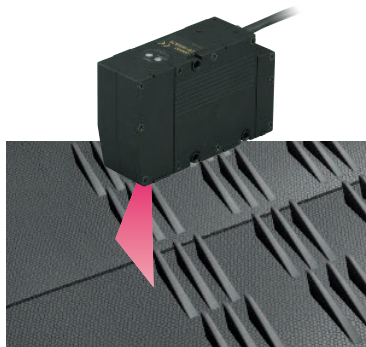

Measuring the shape of air-bag grooves (ZG-WDS8)

### High-precision mode — 16ms

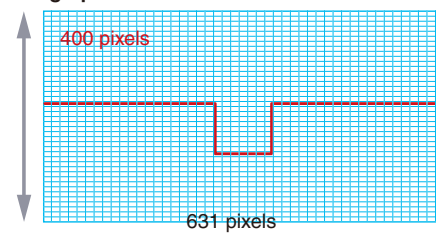

By maximizing the capabilities of the wide CCD, the resolution in the vertical direction is increased by 4 times over that of the standard mode.


## Trigger Synch Measurement

Featuring an operation mode that calculates the measurement value in synch with the command input!

An external command (parallel input with USB 2.0 or RS-232C) can be used in either the fixed or multi sensitivity mode to obtain data at the desired timing.


### Conventional mode!

It was not possible to designate the timing for external measurement requests.

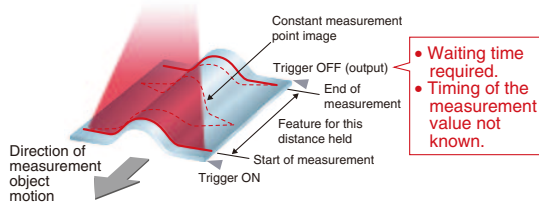

### ZG

Measurement values can be obtained for specific measurement cycles in response to external measurement requests.

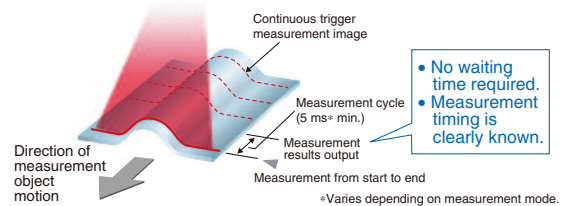

\*Varies depending on measurement mode.


# The Inspection Status Is Immediately Visible

## ■ A Compact, All-in-one Controller with LCD Monitor

Sensor-captured status is completely reproduced as a profile.



**1/3**  
of the  
Conventional Size

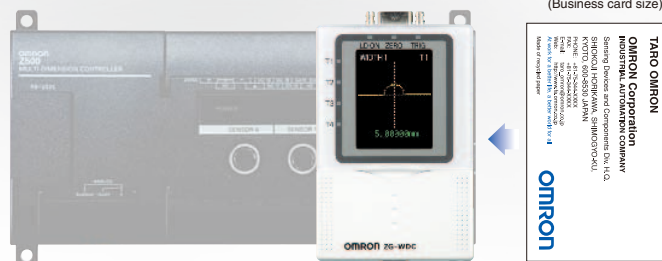


The multifunctional Controller has been condensed to the industry's smallest size so it can be installed wherever it is required, to give precisely the number of inspections that are necessary.

# Enlarged Display of Profiles on a Personal Computer

## ■ Smart Monitor ZG Setup Support Software

Using the included Smart Monitor ZG Setup Support Software (see note), intricate profiles that cannot be sufficiently checked on the Controller's LCD monitor can be displayed and checked on the large screen of a personal computer.

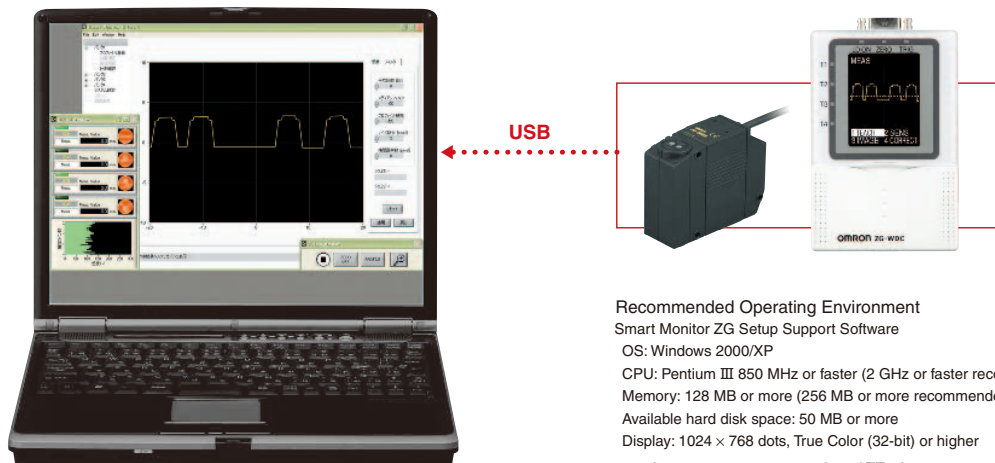

Recommended Operating Environment  
Smart Monitor ZG Setup Support Software  
OS: Windows 2000/XP  
CPU: Pentium III 850 MHz or faster (2 GHz or faster recommended)  
Memory: 128 MB or more (256 MB or more recommended)  
Available hard disk space: 50 MB or more  
Display: 1024 × 768 dots, True Color (32-bit) or higher  
Note: Standard equipment with the ZG-WDC□□A Controller


Note: Screen images are simulated.



# Handy Icons for Versatile Applications


## ■ Measurement Menu

Up to four measurement items can be made simultaneously from among the 18 measurement items available. The measurement items are indicated by easy-to-understand icons for fast, intuitive operation.

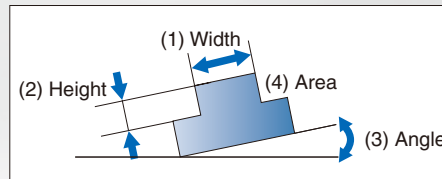


### Height

Measures the height within the designated range.

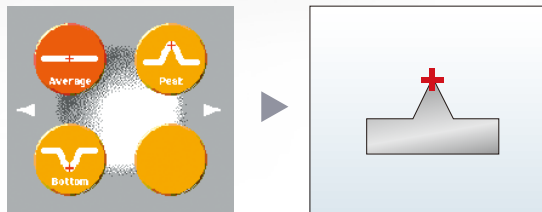


### 2-point Step (2PTS)

Uses measurement point 1 as a reference, and measures the difference between it and measurement point 2.

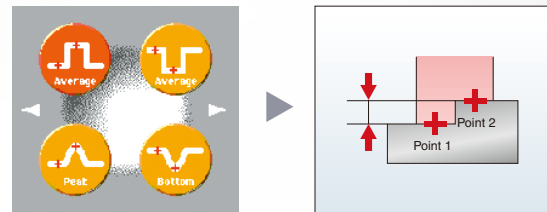


### 3-point Step (3PTS)

Measures the difference between measurement point 3 and the average of measurement points 1 and 2.

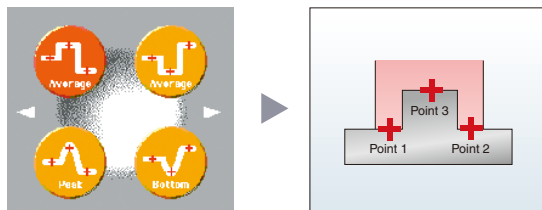



### Edge Position, Width

Scans in the X-axis direction to find an edge, then determines its position and width.

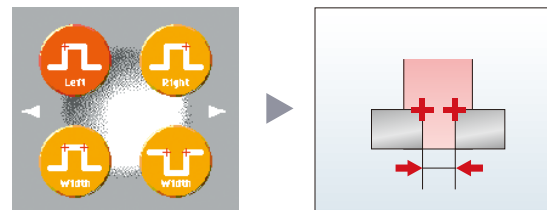



### Area, Angle

Uses the features of a 2D measurement of the Z axis and X axis to find the area and angle.

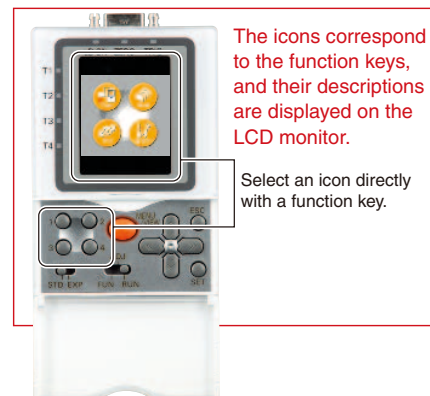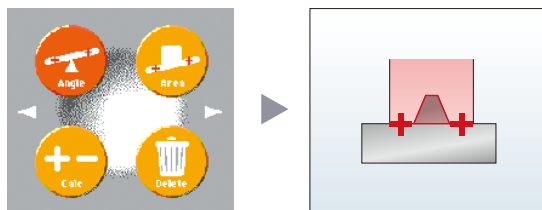


## Basic Configuration

### Sensor Heads

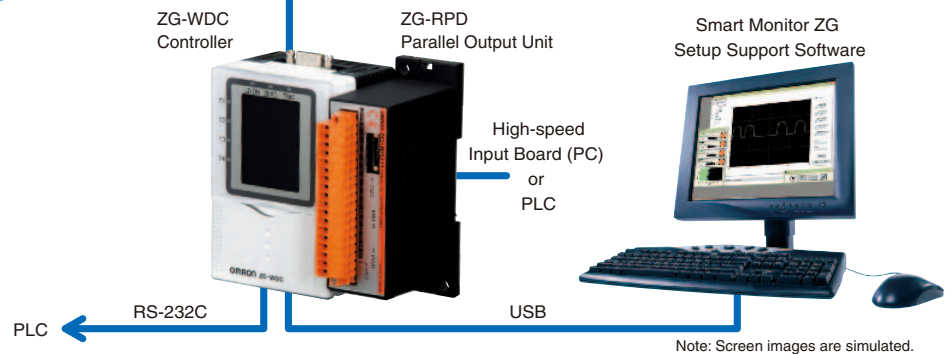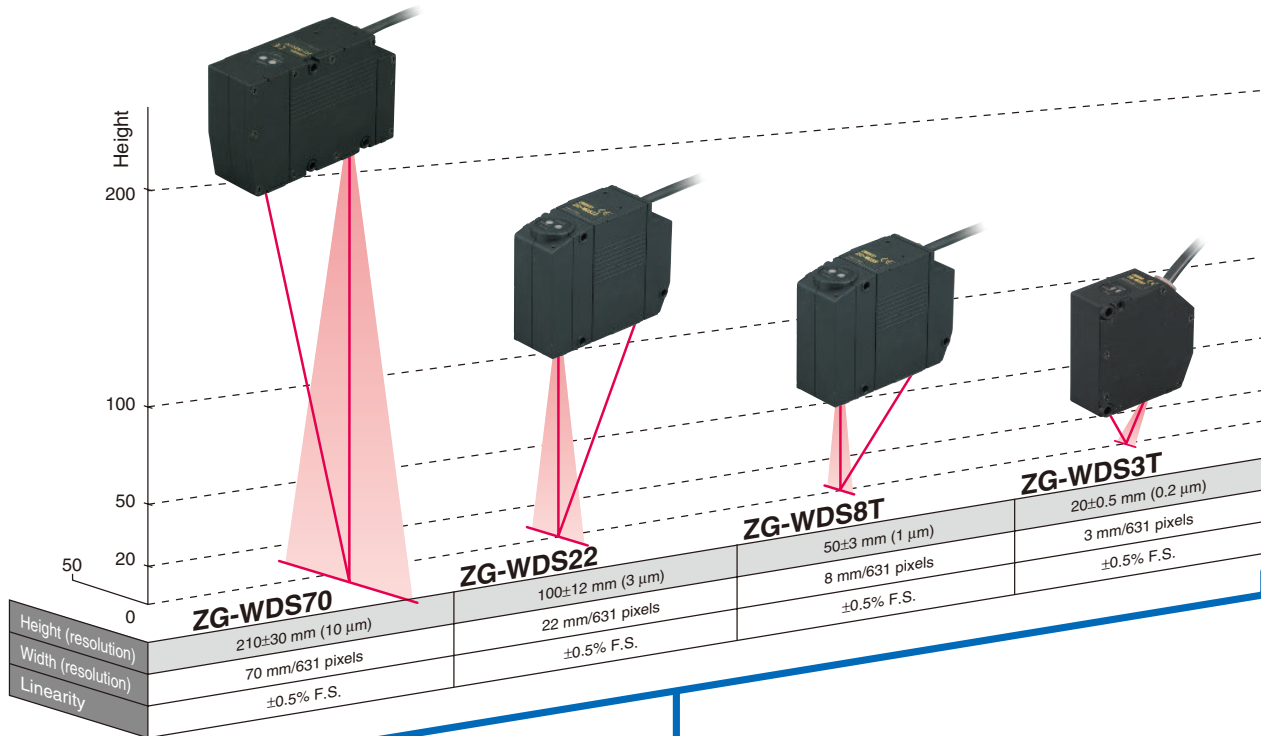


## Cable length between Sensor Head and Controller

### Standard Sensor Head cable length

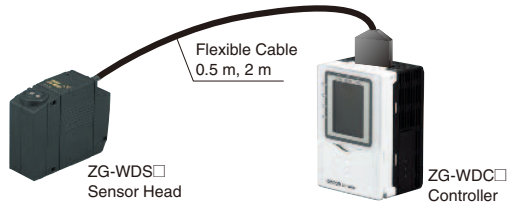

### Extension Cables (25 m max.)

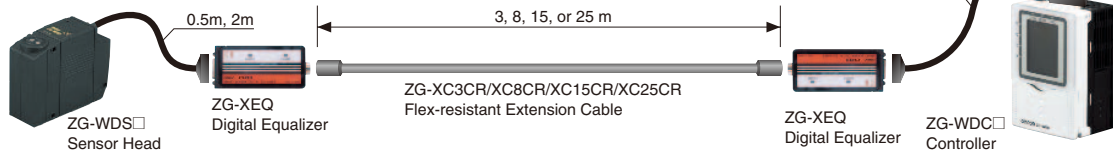

## ■ Ordering Information

### Sensor Heads

Optical method	Sensing distance		Resolution		Model
Diffuse reflective	Height direction: 210±30 mm	Width direction: 70 mm	Height direction: 10 μm	Width direction: 70 mm/631 pixels	ZG-WDS70
Diffuse reflective	Height direction: 100±12 mm	Width direction: 22 mm	Height direction: 3 μm	Width direction: 22 mm/631 pixels	ZG-WDS22
Diffuse reflective	Height direction: 50±3 mm	Width direction: 8 mm	Height direction: 1 μm	Width direction: 8 mm/631 pixels	ZG-WDS8T
Regular reflective	Height direction: 20±0.5 mm	Width direction: 3 mm	Height direction: 0.2 μm	Width direction: 3 mm/631 pixels	ZG-WDS3T

Note 1. For details, refer to the Ratings and Specifications table.  
 2. Designate the cable length (0.5 m, 2 m) when ordering.

### Sensor Controllers

Appearance	Power supply	Output type	Model
	24 VDC	NPN	ZG-WDC11A (See note.)
			ZG-WDC11
		PNP	ZG-WDC41A (See note.)
			ZG-WDC41

Note: Included with Smart Monitor ZG Setup Support Software.

### Accessories (Order Separately)

Real-time Parallel Output Unit (for the ZG-WDC Series)

Appearance	Output type	Model
	NPN	ZG-RPD11
	PNP	ZG-RPD41

#### RS-232 Cable

Connecting device	Model	Qty.
For personal computer connection (2 m)	ZS-XRS2	1
For PLC/PT connection (2 m)	ZS-XPT2	1

#### Sensor Head Extension Cable

Name	Model	Qty.
3-m Extension Cable	ZG-XC3CR	1
8-m Extension Cable	ZG-XC8CR	1
15-m Extension Cable	ZG-XC15CR	1
25-m Extension Cable	ZG-XC25CR	1
Digital Equalizer (Relay Device)	ZG-XEQ	1
0.2-m Digital Equalizer Connection Cable	ZG-XC02D	1

#### Parallel Mounting Adaptor

Appearance	Model	
	ZS-XPM1	For 1 Unit
	ZS-XPM2	For 2 Units or more

# ■ Ratings and Specifications

## Sensor Heads

Item		Model	ZG-WDS70	ZG-WDS22		ZG-WDS8T		ZG-WDS3T		
Optical system			Diffuse reflective		Diffuse reflective	Regular reflective	Diffuse reflective	Regular reflective	Regular reflective	Diffuse reflective
Measurement range	Height direction (in standard mode)	210±30 mm		100±12 mm	94±10 mm	50±3 mm	44±2 mm	20±0.5 mm	5.2±0.4 mm	
	Width direction	70 mm (typical)		22 mm (typical)		8 mm (typical)		3 mm (typical)		
Resolution	Height direction (See note 1.)	10 μm		3 μm		1 μm		0.25 μm		
	Width direction	111 μm (70 mm/631 pixels)		35 μm (22 mm/631 pixels)		13 μm (8 mm/631 pixels)		5 μm (3 mm/631 pixels)		
Linearity (in the height direction) (See note 2.)			±0.5% F.S.							
Temperature characteristic (See note 3.)			0.1% F.S./°C							
Light source	Type	Visible semiconductor laser								
	Wavelength	658 nm							650 nm	
	Output	5 mW max. output, 1 mW max. exposure (without using optical instruments)							1 mW max.	
	Laser class	Class 2M of EN60825-1/IEC60825-1 Class IIIB of FDA (21CFR 1040.10 and 1040.11)							Class 2 of EN60825-1/IEC60825-1 Class II of FDA (21CFR 1040.10 and 1040.11)	
Beam shape (at measurement center distance) (See note 4.)			120 μm × 75 mm (typical)		60 μm × 45 mm (typical)		30 μm × 24 mm (typical)		25 μm × 4 mm (typical)	
LED			STANDBY: Lights when laser irradiation preparation is complete (indication color: green) LD_ON: Lights when the laser is irradiating (indication color: red)							
Measurement object			Opaque material							
Environmental resistance	Ambient light intensity	Incandescent lamp: 1,000 lx max. (light intensity on the receiver surface)								
	Ambient temperature	Operating: 0 to 50°C, Storage: -15 to 60°C (with no icing or condensation)								
	Ambient humidity	Operating and storage: 35 to 85% (with no condensation)								
	Degree of protection	IP66 (IEC 60529)							IP64 (IEC 60529)	
	Vibration resistance (destruction)	10 to 150 Hz with 0.35-mm single amplitude for 80 min each in X, Y, and Z directions								
	Shock resistance (destruction)	150 m/s <sup>2</sup> , 3 times each in 6 directions (up/down, right/left, forward/backward)								
Materials			Case: Aluminum diecast, Front cover: Glass, Cable insulation: Heat-resistive polyvinyl chloride (PVC), Connector: Zinc alloy or brass							
Cable length			0.5 m, 2 m (flexible cable)							
Minimum bending radius			68 mm							
Weight			Approx. 650 g		Approx. 500 g		Approx. 500 g		Approx. 300 g	
Accessories			Laser Labels (EN, 2 labels), Ferrite Core (1), Instruction Manual							

Note: 1. Obtained by setting an OMRON standard measurement object at the measurement center distance and determining the average height of the beam line. The conditions are given in the table below. However, satisfactory resolution cannot be attained in strong electromagnetic fields.

Model	CCD Mode	Average No. of Operations	Measurement object	
			Regular reflective	Diffuse reflective
ZG-WDS70/WDS22/WDS8T	Standard mode	16	OMRON standard white alumina ceramic object	
ZG-WDS3T	Standard mode	32	OMRON standard mirrored object	OMRON standard diffuse reflective object

2. The tolerance for an ideal straight line obtained by determining the average height of an OMRON standard measurement object for the beam line. The CCD standard mode is used. Linearity varies depending on the measurement object.

Model	Measurement object	
	Regular reflective	Diffuse reflective
ZG-WDS70/WDS22/WDS8T	OMRON standard white alumina ceramic object	
ZG-WDS3T	OMRON standard mirrored object	OMRON standard diffuse reflective object

3. A value attained by using an aluminum jig to secure the distance between the Head and the measurement object. The CCD standard mode is used.  
4. Defined as  $1/e^2$  (13.5%) of the center light intensity. This may be influenced when light leakage also exists outside the defined area and the reflectivity of the light around the measurement object is higher than that of the measurement object.

## ■ Ratings and Specifications

### Sensor Controllers

Item		Model	ZG-WDC11/WDC11A	ZG-WDC41/WDC41A
Input/output type			NPN	PNP
No. of connectable Sensor Heads			1 per Controller	
Measurement cycle (See note 1.)			16 ms (high-precision mode), 8 ms (standard mode), 5 ms (high-speed mode)	
Min. display unit			10 nm	
Display range			-999.99999 to 999.99999	
Display		LCD monitor	1.8-inch TFT color LCD (557 × 234 pixels)	
		LEDs	<ul style="list-style-type: none"> <li>Judgment indicators for each task (indication color: orange): T1, T2, T3, T4</li> <li>Laser indicator (indication color: green): LD_ON</li> <li>Zero reset indicator (indication color: green): ZERO</li> <li>Trigger indicators (indication color: green): TRIG</li> </ul>	
External interface	Input/output signal lines	Analog outputs	Select voltage or current (using the sliding switch on the bottom surface) <ul style="list-style-type: none"> <li>Voltage output: -10 to 10 V, output impedance: 40 Ω</li> <li>Current output: 4 to 20 mA, maximum load resistance: 300 Ω</li> </ul>	
		Judgment output (ALL-PASS/NG/ERROR)	NPN open collector 30 VDC, 50 mA max.	PNP open collector 50 mA max.
		Trigger auxiliary output (ENABLE/GATE)	Residual voltage: 1.2 V max.	
		Laser stop input (LD-OFF)	ON: 0 V short or 1.5 V max. OFF: Open (leakage current: 0.1 mA max.)	
		Zero reset input (ZERO)		
	Measurement trigger input (TRIG)			
	Bank switching input (BANK A, B)	ON: Power supply voltage short or power supply voltage -1.5 V max. OFF: Open (leakage current: 0.1 mA max.)		
Serial I/O	USB2.0	1 port, full speed (12 Mbps), MINI-B		
	RS-232C	1 port, 115,200 bps max.		
Main functions		No. of setting banks	4	
		Sensitivity adjustment	Multi/auto/fixd	
		Measurement items	Height, 2-point Step, 3-point Step, Edge position, Edge width, Angle/Area/Calculation (up to four items can be measured simultaneously)	
		Trigger modes	External trigger/continuous	
Ratings		Power supply voltage	21.6 to 26.4 VDC (including ripple current)	
		Current consumption	0.8 A max.	
		Insulation resistance	20 MΩ at 250 V between lead wires and Controller case	
		Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between lead wires and Controller case	
Environmental resistance		Ambient temperature	Operating: 0 to 50°C, Storage: -15 to 60°C (with no icing or condensation)	
		Ambient humidity	Operating and storage: 35 to 85%	
		Degree of protection	IP20 (IEC 60529)	
		Vibration resistance (destruction)	Vibration frequency: 10 to 150 Hz, single amplitude: 0.35 mm, acceleration: 50 m/s <sup>2</sup> , 10 times for 8 min each	
		Shock resistance (destruction)	150 m/s <sup>2</sup> , 3 times each in 6 directions (up/down, right/left, forward/backward)	
Materials		Case: Polycarbonate (PC), Cable insulation: Heat-resistive polyvinyl chloride (PVC)		
Cable length		2 m (flexible cable)		
Weight		Approx. 300 g (including cable) (Packed state: Approx. 450 g)		
Accessories		ZG-WDC□1: Large Ferrite Core, Insulation lock, Instruction Manual ZG-WDC□1A: Large Ferrite Core, Small Ferrite Core, Insulation lock, Instruction Manual, Smart Monitor ZG Setup Support Software (CD-ROM)		


Note: 1. The image input periods listed here are for fixed/auto sensitivity. The image input period will be longer for multi-sensitivity or other settings. Use the eco monitor in RUN mode to determine the actual image input period.

# Dimensions

## Sensor Heads


ZG-WDS3T  
(Regular reflective)

(Unit: mm)

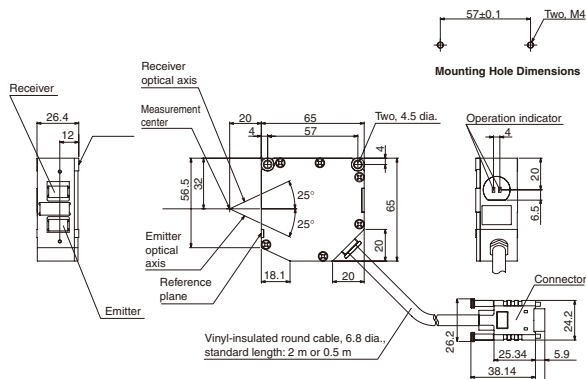

(Diffuse reflective)


(Unit: mm)

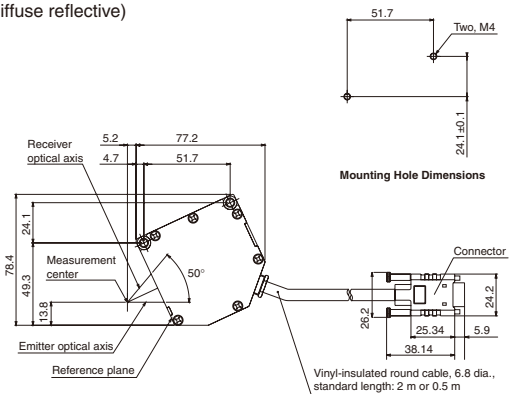

## Sensor Heads

ZG-WDS8T/WDS22  
(Diffuse reflective)


(Unit: mm)

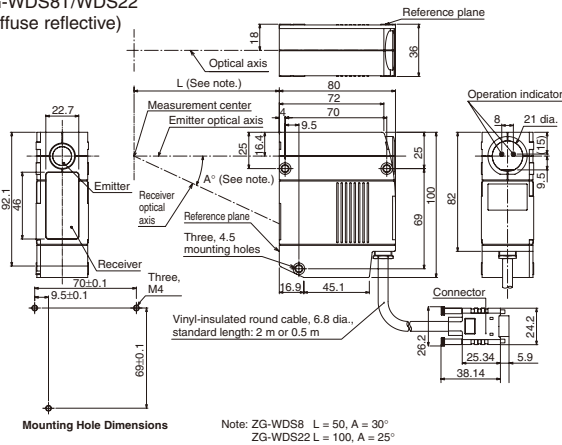

Note: ZG-WDS8 L = 50, A = 30°  
ZG-WDS22 L = 100, A = 25°

ZG-WDS8T  
(Regular reflective)


(Unit: mm)

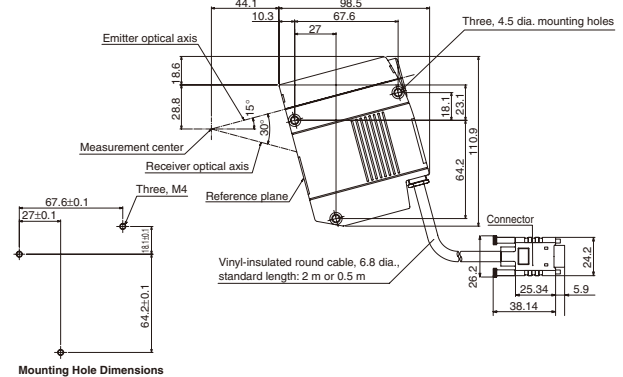

## Sensor Heads


ZG-WDS70  
(Diffuse reflective)

(Unit: mm)

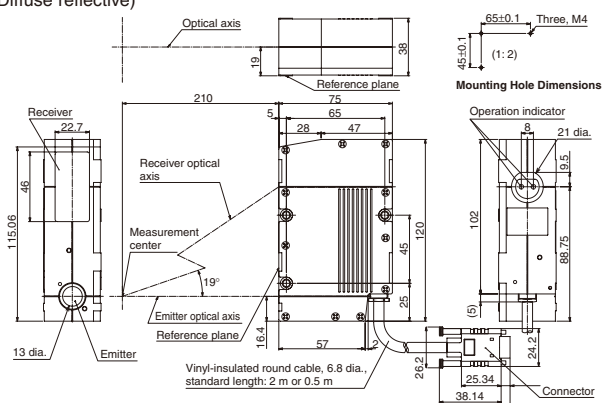

ZG-WDS22  
(Regular reflective)


(Unit: mm)

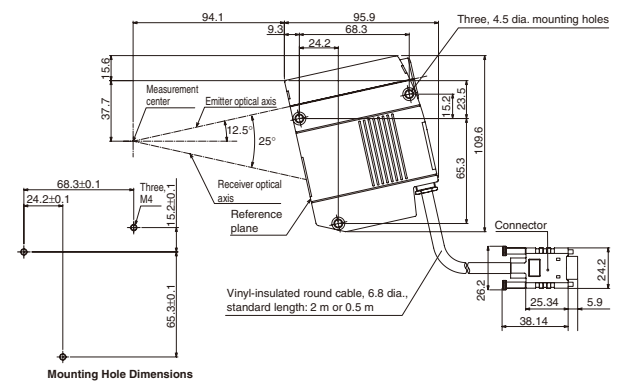

## Sensor Controllers

ZG-WDC11/WDC41


(Unit: mm)

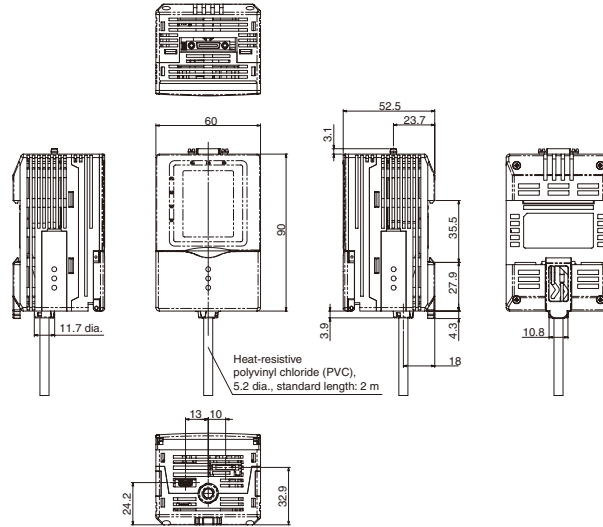

## Parallel Mounting Adaptor

ZS-XPM1/XPM2 (Dimensions for mounting to a control panel)

(Unit: mm)

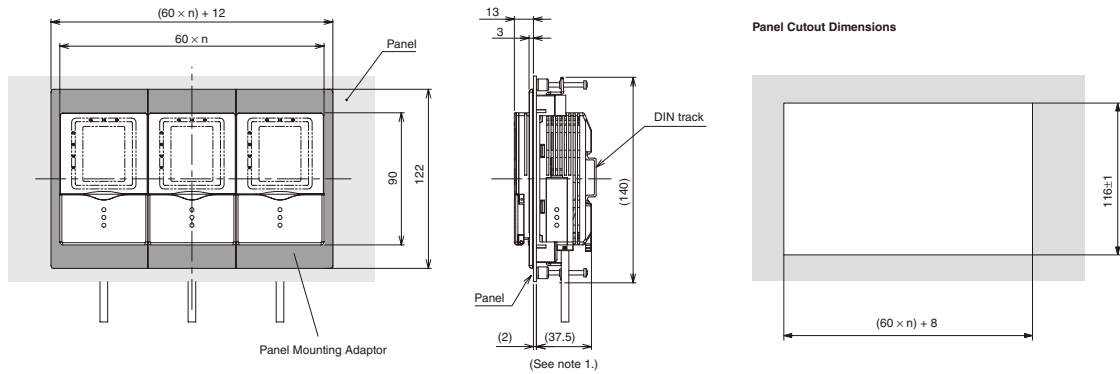


Note: When using multiple units side-by-side

Note 1: This shows the dimensions for a panel thickness of 2.0 mm

## Real-time Parallel Output Unit

ZG-RPD11/RPD41


(Unit: mm)

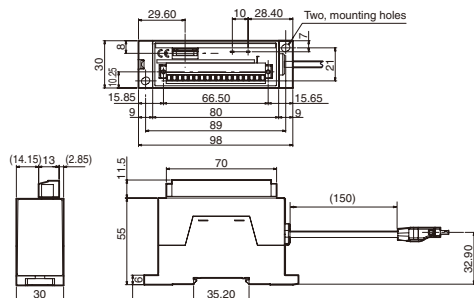

## Digital Equalizer

ZG-XEQ

(Unit: mm)

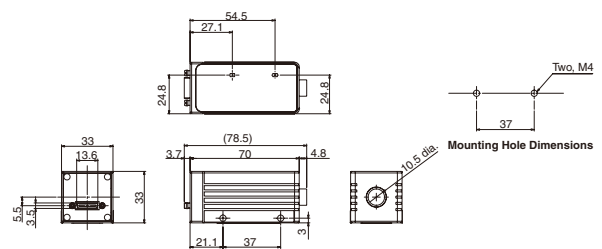

## Safety Precautions for Laser Equipment

### WARNING

**Do not expose your eyes to laser radiation either directly or reflected from a mirrored surface.**

The emitted laser beams have a high power density and direct exposure may result in loss of eyesight.

The warning and explanatory label on the side of the Sensor Head in the ZG Series is in Japanese. Replace it with the English label that comes with the product.



This document provides information mainly for selecting suitable models. Please read the User's Manual carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

**Note: Do not use this document to operate the Unit.**

### **OMRON Corporation** Industrial Automation Company

**Sensing Devices Division H.Q.**  
**Application Sensors Division**  
Shiokoji Horikawa, Shimogyo-ku,  
Kyoto, 600-8530 Japan  
Tel: (81) 75-344-7068/Fax: (81) 75-344-7107

#### **Regional Headquarters**

**OMRON EUROPE B.V.**  
**Sensor Business Unit**  
Carl-Benz-Str. 4, D-71154 Nufringen,  
Germany  
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

**OMRON ELECTRONICS LLC**  
One Commerce Drive Schaumburg,  
IL 60173-5302 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark, Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
Pu Dong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

#### **Authorized Distributor:**

Note: Specifications subject to change without notice.

Cat. No. Q150-E1-01A  
Printed in Japan  
0607-1M (1006) (C)



## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### ERRORS AND OMISSIONS

The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

### COPYRIGHT AND COPY PERMISSION

This catalog shall not be copied for sales or promotions without permission.

This catalog is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this catalog in any manner, for any other purpose. If copying or transmitting this catalog to another, please copy or transmit it in its entirety.